## **Manhole Inspection Report**



Date:

04/24/2018

Weather:

Coding: **RZMACP** 

MH#:

M-506-003

Owner:

Len. Surveyed:

14.4

P.O.#:

NA

Surveyor: Jen Costello U-907-5518 Cert. #:

Rim to Invert:

16.5 Wall Material: Concrete (reinforced)

Street: City:

Customer:

8th St. 601' West of Wisconsin St.

Project:

Hobart, IN

Location:

Hobart, IN

**GPS Northing:** 

41.5254631 -87.27134705

Drain Area:

Southwest

GPS Easting:

**Nearest Meter** 

Cover Shape:

Circular

GPS Accuracy: Evidence of Surcharge:

No

Cover Size: Comments: 22.5

Potential for Runoff:

None

O&M Index:

2.00 O&M Quick:

2200 3200 3222

O&M Rating: Structural Rating:

Overall Rating:

4.00 6.00 10.00

Structural Index: Overall Index:

3.00 Structural Quick: 2.50 Overall Quick:

Wednesday, May 3, 2023

1

	Position	Code	Observation	Video (sec)	Grade
06-00	)3				
	0. 🖊	MGO	General Observation	10	NA
ш	\.0	DB	Displaced Brick	21	S 3
	1.2	MGO	General Observation	37	NA
ш	2.6	OBP	Obstacle External Pipe or Cable	53	M 2
	4.2	IS	Infil Stain	68	NA
ш	9.2	SAV	Surface Aggregate Visible	89	S 3
	14.3	DSF	Deposits Settled Fine	111	M 2
	14.4	MGO	General Observation	122	NA
$\ $					



Description:	General Observation		
Distance (ft):	.0		
Structural Grade:	0		
O&M Grade:	0		
Clock Start/From:			
Clock To:			
1st Value:			
2nd Value:			
Value Percent:			
Step:	NO		
Remarks:	ACCESS MH		

MGO

Wednesday, May 3, 2023

Code:



Code: **DB** 

Description: Displaced Brick

Distance (ft): .0
Structural Grade: 3
O&M Grade: 0
Clock Start/From: 2
Clock To: 4
1st Value:

2nd Value: Value Percent:

Step: NO

Remarks:



Code: MGO


Description: General Observation

Distance (ft): 1.2
Structural Grade: 0
O&M Grade: 0
Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent:

Step: NO

Remarks: UNDERSIDE OF FRAME

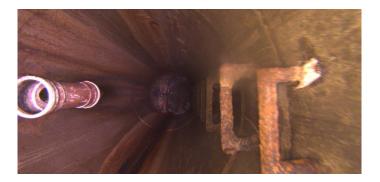

Code: OBP

Description: Obstacle External Pipe or Cable

Distance (ft): 2.6
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 9
Clock To:
1st Value:

2nd Value:

Value Percent: 5.000 Step: NO

Remarks:

Wednesday, May 3, 2023



Code: IS

Description: Infil Stain

Distance (ft): 4.2
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 12
Clock To: 12

1st Value: 2nd Value: Value Percent:

Step: NO

Remarks:



Code: SAV

Description: Surface Aggregate Visible

Distance (ft): 9.2
Structural Grade: 3
O&M Grade: 0
Clock Start/From: 12
Clock To: 12
1st Value:
2nd Value:

Step: NO

Remarks:

Value Percent:



Code: **DSF** 

Description: Deposits Settled Fine

Distance (ft): 14.3
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 12
Clock To: 12
1st Value:

2nd Value:

Value Percent: 5.000 Step: NO

Remarks:

Wednesday, May 3, 2023 4



Code: MGO

Description: General Observation

Distance (ft): 14.4
Structural Grade: 0
O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent:

Step: NO

Remarks: end survey