Profile/Photo Observation Report



Date: 03/24/2018 Weather: Coding: PACP 6.0

Pipe Length (ft): 304.4 Owner: NA Pre Clean: No Pre-Cleaning P.O.#: Surveyor: Justin Gonzales PSR: P-108-002-004

Customer: Clean Date: 01/01/1900 Shape: C

Street: FOXCROFT STREET Flow Control: Not Controlled

City: Hobart, IN Year Renewed:
Location: Light Highway Tape/Media #:

Purpose: Routine Assessment Dia/Height: 10"
Use: Sanitary Material: VCP

Drain Area: NA Lining:

Category: NA
Comment: Flow direction wrong

Location Details: Direction of Survey: **Downstream**

US MH: M-108-004 DS MH: M-108-002 Total Length Surveyed (ft): 314.1

2.00 2L00 130.00 O&M Index: O&M Quick: O&M Rating: 2.00 3121 6.00 Structural Quick: Structural Rating: Structural Index: 2.00 312L 136.00 Overall Quick: Overall Rating: Overall Index:

108-00					
	<u>.0</u>	AMH	Manhole	10	NA
	0.	MWL	Water Level	21	NA
ш	0.	DAGS(S01)	Deposits Attached Grease	32	M 2
+	44.2	DSF	Deposits Settled Fine	132	M 2
+	54.9	DSF	Deposits Settled Fine	165	M 2
Ш.	77.9	TF	Tap Factory	222	NA
	111.9	TF	Tap Factory	303	NA
	113.5	CL	Crack Longitudinal	318	S 2
_//	140.7	TF	Tap Factory	384	NA
	164.0	MGO	General Observation	443	NA
/	195.4	TF	Tap Factory	518	NA
	249.8	TF	Tap Factory	638	NA
H/,	262.7	TF	Tap Factory	676	NA
	294.0	FL	Fracture Longitudinal	751	S 3
	294.7	IS	Infil Stain	763	NA
Ш	299.0	RPR	Repair Point Pipe Replaced	783	NA
	299.0	JOM	Joint Offset Medium	795	S 1
	306.6	TF	Tap Factory	822	NA
	314.1	RPR	Repair Point Pipe Replaced	848	NA
	314.1	DAGS(F01)	Deposits Attached Grease	860	M 2
	314.1	AMH	Manhole	871	NA

Code:



Description:	Manhole		
Distance (ft):	.0		
Structural Grade:	0		
O&M Grade:	0		
Clock Start/From:			
Clock To:			
1st Value:			
2nd Value:			
Value Percent:			
Continuous Index:			
Within 8" of Joint:	NO		
Remarks:	M-108-004		

 AMH



Code: MWL

Description: Water Level

Distance (ft): .0
Structural Grade: 0
O&M Grade: 0
Clock Start/From:

Clock To: 1st Value:

2nd Value:

Value Percent:

Continuous Index:

Within 8" of Joint:

Remarks:

5.000

NO

Code: DAGS

Description: Deposits Attached Grease



Distance (ft): .0
Structural Grade: 0

O&M Grade: 2
Clock Start/From: 7
Clock To: 5

1st Value: 2nd Value:


Remarks:

Value Percent: 5.000
Continuous Index: S01
Within 8" of Joint: YES

WANDER

Code: **DSF**

Description: Deposits Settled Fine



Distance (ft): 44.2
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 6

Clock To: 1st Value: 2nd Value:


Value Percent: 5.000

Continuous Index:

Within 8" of Joint:

Remarks:

NO

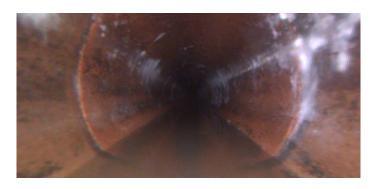

Code: **DSF**


Description: Deposits Settled Fine

Distance (ft): 54.9
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 6

Clock To: 1st Value: 2nd Value:

Value Percent: 5.000

Continuous Index: Within 8" of Joint:

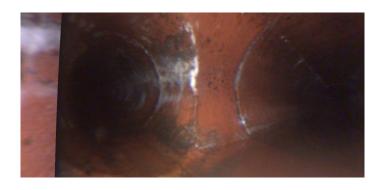

Code: **TF**

Description: Tap Factory


Distance (ft): 77.9
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 9

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks:

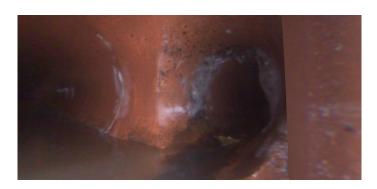

Code: **TF**

Description: Tap Factory

Distance (ft): 111.9
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 3

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:



Code: CL


Description: **Crack Longitudinal**

Distance (ft): 113.5 Structural Grade: 2 0 O&M Grade: Clock Start/From: 3

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks:





Code: TF


Description: **Tap Factory**

Distance (ft): 140.7 Structural Grade: 0 O&M Grade: 0 Clock Start/From: 9

Clock To:

4.000 1st Value:

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

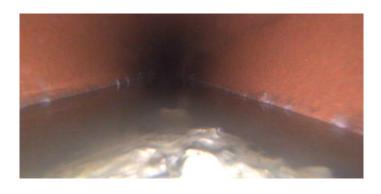

Code: MGO

Description: General Observation


Distance (ft): 164.0
Structural Grade: 0
O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks: TOILET TISSUE

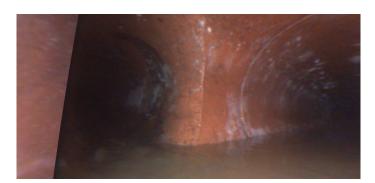

Code: TF

Description: Tap Factory

Distance (ft): 195.4
Structural Grade: 0


O&M Grade: 0

Clock Start/From: 9

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

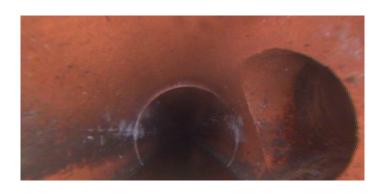

Code: **TF**

Description: Tap Factory

Distance (ft): 249.8
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 3

Clock To:

Remarks:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:



Code: **TF**

Description: Tap Factory

Distance (ft): 262.7
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 9

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:



Code: FL

Description: Fracture Longitudinal

Distance (ft): 294.0
Structural Grade: 3
O&M Grade: 0
Clock Start/From: 12


Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

YES

YES

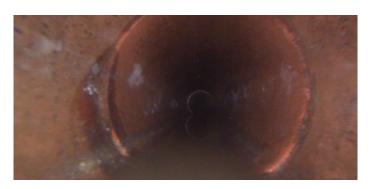

Code: IS

Description: Infil Stain

Distance (ft): 294.7
Structural Grade: 0
O&M Grade: 7
Clock Start/From: 7
Clock To: 10
1st Value: 2nd Value:

Continuous Index: Within 8" of Joint:

Value Percent:

ieiiii o oi soiiie.



Code: RPR

Description: Repair Point Pipe Replaced

Distance (ft): 299.0 Structural Grade: 0

O&M Grade: 0

Clock Start/From: Clock To: 1st Value:

2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks: VCP TO PVC

Code: **JOM**

Description: Joint Offset Medium



Distance (ft): 299.0 Structural Grade: 1


O&M Grade: **0**

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent:

Continuous Index:

Within 8" of Joint: NO

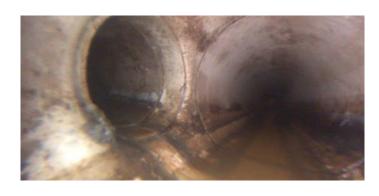

Code: **TF**

Description: Tap Factory

Distance (ft): 306.6
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 9

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks:

Code: RPR

Description: Repair Point Pipe Replaced



Distance (ft): 314.1
Structural Grade: 0

O&M Grade: 0

Clock Start/From:

Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint: NO

Remarks: RPR END



Code: DAGS

Description: Deposits Attached Grease

Distance (ft): 314.1
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 7
Clock To: 5

1st Value: 2nd Value:

Value Percent: 5.000
Continuous Index: F01
Within 8" of Joint: YES

Remarks: WANDER



Code: AMH
Description: Manhole

Distance (ft): 314.1
Structural Grade: 0

O&M Grade: 0

Clock Start/From:

Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint: NO

Remarks: M-108-002