Manhole Inspection Report



Date:

05/15/2018

Weather:

Coding:

RZMACP

MH#:

M-804-027

Owner: NA Len. Surveyed:

16.4 17.3

P.O.#:

Surveyor: Cert. #:

Jen Costello U-907-5518

Rim to Invert: Wall Material:

Concrete

(reinforced)

Street:

Customer:

Hickey St. 337' West of Liberty St.

Project: Hobart, IN

City:

Hobart, IN **GPS Northing:** 2908736.282

Location:

GPS Easting:

2908736.282

Drain Area:

Cover Shape:

Northeast GPS Accuracy: **Sub-Meter**

Circular

Evidence of Surcharge:

No

Cover Size:

22.5

Potential for Runoff:

None

Comments:

0.00 O&M Quick:

0000

5131

5131

O&M Rating: Structural Rating:

Overall Rating:

0.00 8.00

8.00

O&M Index: Structural Index: Overall Index:

4.00 Structural Quick: 4.00 Overall Quick:

Wednesday, May 3, 2023

Position	Code	Observation	Video (sec)	Grade
4-027				
.0	MGP	General Photo	10	NA
0.	DB	Displaced Brick	21	S 3
1.5	MGO	General Observation	38	NA
2.0	HSV	Hole Soil Visible	52	S 5
16.4	MGO	General Observation	92	NA

Code:




Description: Distance (ft): .0 Structural Grade: 0 O&M Grade: 0 Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Step: NO Remarks: **ACCESS MH**

MGP

General Photo

Wednesday, May 3, 2023 2

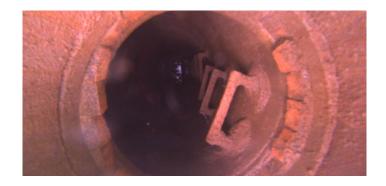

Code: **DB**

Description: Displaced Brick

Distance (ft): .0
Structural Grade: 3
O&M Grade: 0
Clock Start/From: 12
Clock To: 12
1st Value:

2nd Value: Value Percent:

Step: NO

Remarks:



Code: MGO

Description: General Observation

Distance (ft): 1.5
Structural Grade: 0
O&M Grade: 0
Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent:

Step: NO

Remarks: UNDERSIDE OF FRAME



Code: HSV

Description: Hole Soil Visible

Distance (ft): 2.0
Structural Grade: 5
O&M Grade: 0
Clock Start/From: 11
Clock To:
1st Value:
2nd Value:
Value Percent:

Step: NO

Remarks:

Wednesday, May 3, 2023 3



Code: MGO

Description: General Observation

Distance (ft): 16.4
Structural Grade: 0

O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent:

Step: NO

Remarks: END SURVEY