
Date:	04/28/2018	Weather:		Coding:	PACP 6.0
Pipe Length (f	t):	Owner:	City of Hobart	Pre Clean:	No Pre-Cleaning
P.O.#:	133	Surveyor:	M. Pielacha	PSR:	P-505-007-006
Customer:	City of Hobart	Clean Date:		Shape:	С
Street:	California Street		Flow Control:	Not Controlled	I
City:	Hobart, IN		Year Renewed:		
Location:	Light Highway		Tape/Media #:	DEP 133	
Purpose:	Routine Assessme	nt	Dia/Height:	15"	
Use:	Sanitary		Material:	VCP	
Drain Area:			Lining:		
Category:	NA				
Comment: YES501824 Submital 2					
Location Details:			Direction of Surve	ey: Upstream	
US MH:	M-505-007	DS MH:	M-505-006	Total Length Surveyed (ft): 6.6
D&M Index:	3.00	O&M Quick:	3100	O&M Rating:	3.00
Structural Index	0.00	Structural Qu	iick: 0000	Structural Rating:	0.00
Overall Index: 3.00		Overall Quick			3.00





Code: Description:	AMH Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-505-006

Thursday, May 4, 2023

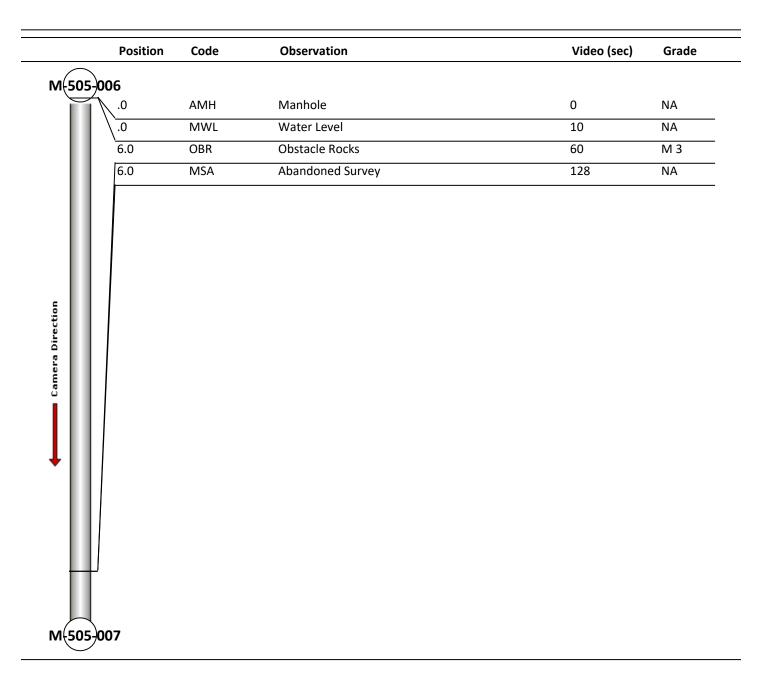

Code:	MWL	
Description:	Water Level	
	•	
Distance (ft):	.0	
Structural Grade:	0	
O&M Grade:	0	
Clock Start/From:		
Clock To:		
1st Value:		
2nd Value:		
Value Percent:	10.000	
Continuous Index:		
Within 8" of Joint:	NO	
Remarks:		



Code: Description:	OBR Obstacle Rocks
Distance (ft):	6.0
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	5
Clock To:	7
1st Value:	
2nd Value:	
Value Percent:	20.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	MSA Abandoned Survey
Distance (ft):	6.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	debris