Profile/Photo Observation Report

•		•				ROBOTICS
Date:	10/19/2021	Weather:			Coding:	PACP 7.0
Pipe Length (ft):	167.1	Owner:	City of Hol	part	Pre Clean:	Heavy Cleaning
P.O.#:	YES502259	Surveyor:	S. Bucklin		PSR:	P-503-016-009
Customer:	City of Hobart	Clean Date	: 09/06/202	1	Shape:	С
Street:	West 39th Place		Flow Contro	l:	Not Controlled	
City:	Hobart, IN		Year Renew	ed:		
Location:	Alley		Tape/Media	#:		
Purpose:	Routine Assessmer	nt	Dia/Height:		12"	
Use:	Sanitary Sewage Pi	ре	Material:		VCP	
Drain Area:			Lining:			
Category:	NA					
Comment:						
Location Details	:		Direction of	Survey:	Downstream	
US MH:	M-503-009	DS MH:	M-503-016	To	tal Length Surveyed (ft):	167.1
&M Index:	2.04	O&M Quick	:	322H	O&M Rating:	96.00
ructural Index:	2.70	 Structural Q	uick:	5345	Structural Rating:	100.00
verall Index:	2.33	Overall Quid	-k·	5345	Overall Rating:	196.00


	Position	Code	Observation	Video (sec)	Grade
503	-009				
\mathbf{i}	0. /	AMH	Manhole	1	NA
	0	MWL	Miscellaneous Water Level	63	NA
	.0	DSF(S01)	Deposits Settled Fine	72	M 2
		DAE(S02)	Deposits Attached Encrustation	127	M 2
	12.6	MWLS	Miscellaneous Water Level Sag	195	S 2
	14.4	FM	Fracture Multiple	243	S 4
ш	18.5	SZ	Surface Damage Other	281	NA
ш	20.1	FM	Fracture Multiple	312	S 4
ш	20.1	В	Broken	342	S 4
	20.1	SMW	Surface Damage Missing Wall	353	S 5
H	- 30.9	CM	Crack Multiple	438	S 3
		FM	Fracture Multiple	541	S 4
ш	39.1	MWLS(S04)	Miscellaneous Water Level Sag	568	S 2
H	-\\\\41.2	BVV	Broken Void Visible	612	S 5
	7\\\47.3	HVV	Hole Void Visible	704	S 5
ш	\\ <u></u> 53.8	DAE(F02)	Deposits Attached Encrustation	754	M 2
	_\\\	MWLS(F04)	Miscellaneous Water Level Sag	778	S 2
	\\64.8	TFD	Tap Factory Defective	825	M 3
	-\ 73.2	JOM	Joint Offset Medium	877	S 3

Thursday, December 30, 2021

RedZone[®]

74.8	MWLS(S05)	Miscellaneous Water Level Sag	900	S 2
84.7	SSS	Surface Damage Surface Spalling	950	S 2
84.7	В	Broken	962	S 4
87.1	TFC	Tap Factory Capped	980	NA
88.8	CL	Crack Longitudinal	1006	S 2
98.2	DAE	Deposits Attached Encrustation	1061	M
104.8	FL	Fracture Longitudinal	1101	S 3
109.0	MWLS(F05)	Miscellaneous Water Level Sag	1121	S 2
113.3	CL	Crack Longitudinal	1146	S 2
113.6	MWLS(S06)	Miscellaneous Water Level Sag	1151	S 2
116.6	DAE	Deposits Attached Encrustation	1200	M
129.0	CM	Crack Multiple	1283	S 3
129.7	TFC	Tap Factory Capped	1293	NA
132.2	TFD	Tap Factory Defective	1330	M
136.4	CM(S07)	Crack Multiple	1400	S 3
142.9	SSS	Surface Damage Surface Spalling	1443	S 2
142.9	MWLS(F06)	Miscellaneous Water Level Sag	1470	S 2
153.7	CM(F07)	Crack Multiple	1517	S 3
157.7	MMC	Miscellaneous Material Change	1570	NA
164.0	MMC	Miscellaneous Material Change	1639	NA
/ 165.5	DSF(F01)	Deposits Settled Fine	1666	M
167.1	AMH	Manhole	0	NA


M(503-016

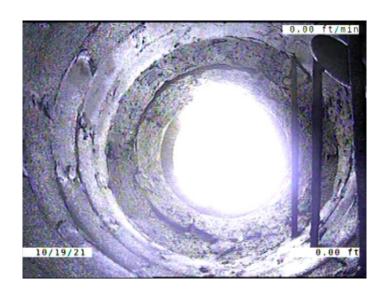


Code:	AMH
Description:	Manhole
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	.0 0 0
Within 8" of Joint:	NO
Remarks:	M-503-009




Code: Description:	MWL Miscellaneous Water Level
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	10.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

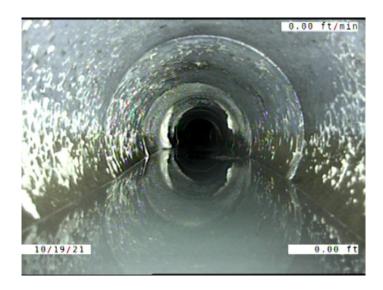


Code:	DSF
Description:	Deposits Settled Fine
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	.0 0 2 5 7 5.000 \$01 YES

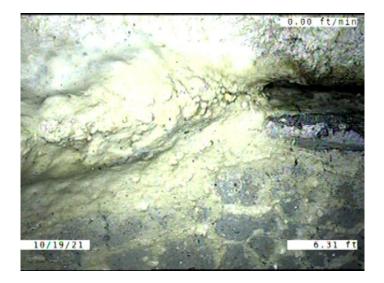


Code: Description:	DAE Deposits Attached Encrustation
·	
Distance (ft):	6.3
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	S02
Within 8" of Joint:	YES
Remarks:	

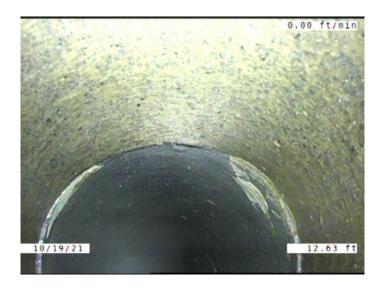

Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	12.6
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

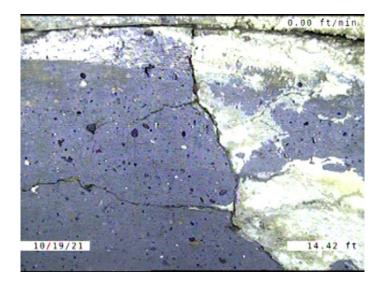


Code:	FM
Description:	Fracture Multiple
Distance (ft):	14.4
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	10
Clock To:	2
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

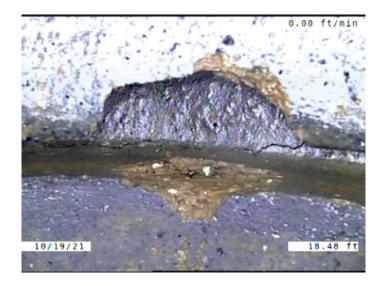

Code: Description:	SZ Surface Damage Other
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	18.5 0 0 1
Within 8" of Joint: Remarks:	YES A PIECE CHIPPED AWAY FROM THE JOINT




Code:	FM
Description:	Fracture Multiple
Distance (ft):	20.1
	20.1
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	12
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

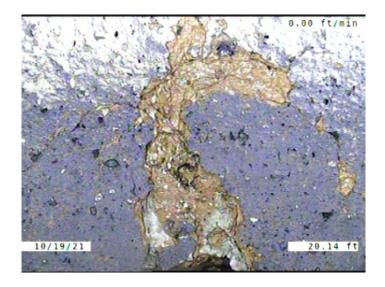


Code: Description:	B Broken
Distance (ft):	20.1
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	2
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code:	SMW
Description:	Surface Damage Missing Wall
Distance (ft):	20.1
Structural Grade:	5
O&M Grade:	0
Clock Start/From:	1
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	INSIDE OF THE JOINT

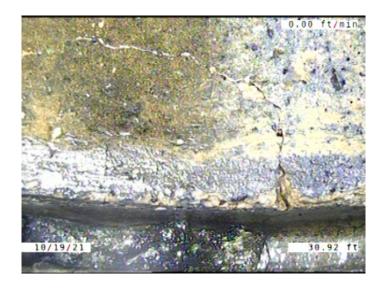


Distance (ft):30.9Structural Grade:3O&M Grade:0Clock Start/From:3Clock To:61st Value:-2nd Value:-Value Percent:-Continuous Index:-Within 8" of Joint:YESRemarks:-	

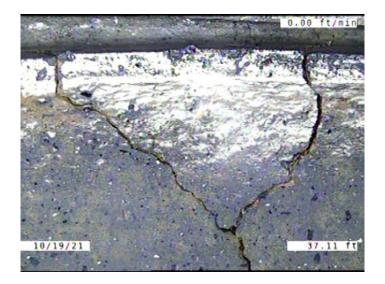


Code: Description:	FM Fracture Multiple
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	37.1 4 0 8 4
Within 8" of Joint: Remarks:	YES



Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	39.1
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	S04
Within 8" of Joint:	NO
Remarks:	

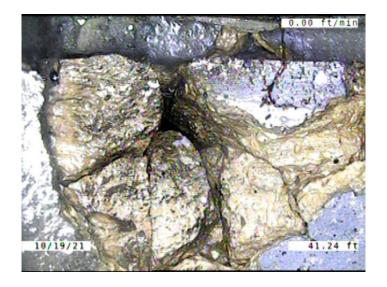

Code: Description:	BVV Broken Void Visible
Distance (ft):	41.2
Structural Grade:	5
O&M Grade:	0
Clock Start/From:	8
Clock To:	9
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

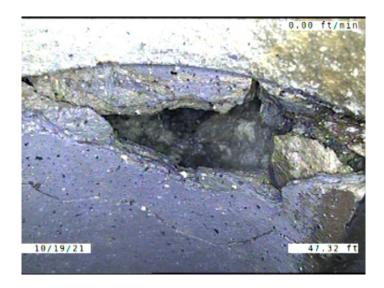

Code: Description:	HVV Hole Void Visible
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	47.3 5 0 1 3
Remarks:	SOIL AND VOID VISIBLE




Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	53.8
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	F02
Within 8" of Joint:	YES


Remarks:



Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	57.5
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	F04
Within 8" of Joint:	NO
Remarks:	

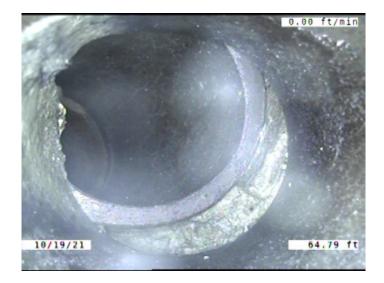


Code:	TFD
Description:	Tap Factory Defective
Distance (ft):	64.8
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	11
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	CONSTANTLY RUNNING WATER.
	LARGE OFFSET FIRST JOINT BACK

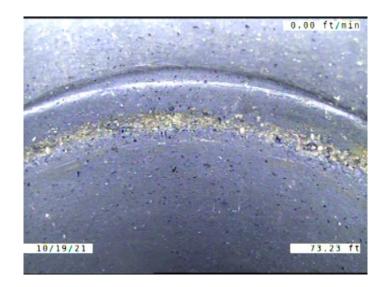

Code: Description:	JOM Joint Offset Medium
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	73.2 3 0
Within 8" of Joint: Remarks:	NO



Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	74.8
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	S05
Within 8" of Joint:	NO
Remarks:	

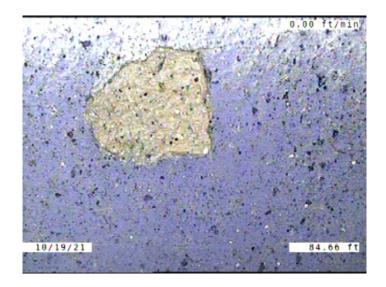

Code: Description:	SSS Surface Damage Surface Spalling
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	84.7 2 0 10
	NO




Code:	В
Description:	Broken
Distance (ft):	84.7
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	8
Clock To:	11
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	TFC Tap Factory Capped
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	87.1 0 0 11 4.000 YES



Code: Description:	CL Crack Longitudinal
Distance (ft):	88.8
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	2
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

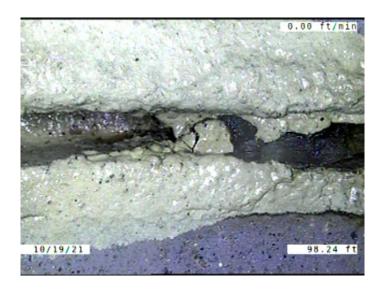

Code: Description:	DAE Deposits Attached Encrustation
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent:	98.2 0 2 9 12 5.000
Continuous Index: Within 8" of Joint: Remarks:	YES




Code: Description:	FL Fracture Longitudinal
Distance (ft):	104.8
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	4
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	109.0
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	F05
Within 8" of Joint:	NO
Remarks:	



L
rack Longitudinal
13.3
ES

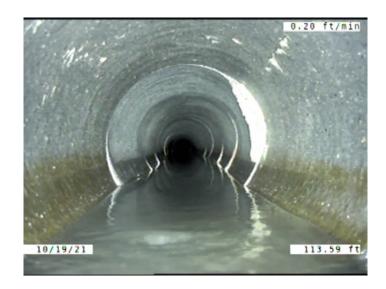

Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	113.6
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	S06
Within 8" of Joint:	NO
Remarks:	

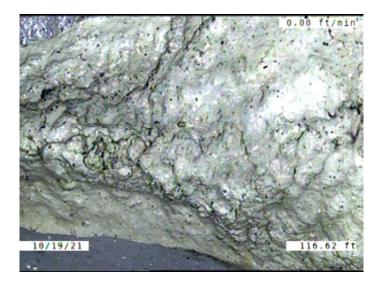


Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	116.6
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	10
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES


Remarks:




Code: Description:	CM Crack Multiple
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	129.0 3 0 12 1
Remarks:	

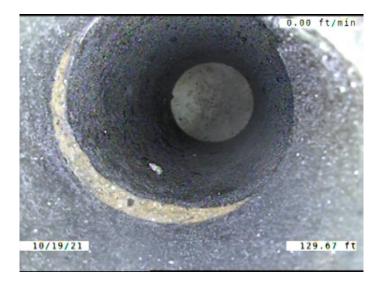


Code: Description:	TFC Tap Factory Capped
Distance (ft):	129.7
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	1
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

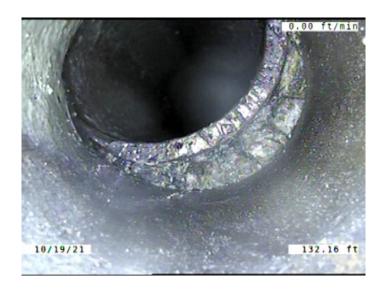

Code:	TFD
Description:	Tap Factory Defective
Distance (ft):	132.2
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	11
Clock To: 1st Value: 2nd Value:	4.000
Value Percent: Continuous Index: Within 8" of Joint: Remarks:	YES Defective

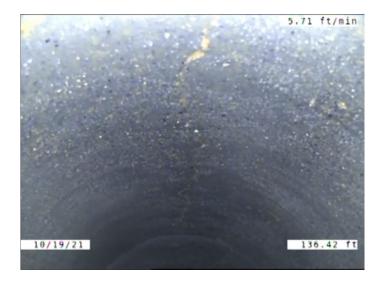

Code:	СМ
Description:	Crack Multiple
Distance (ft):	136.4
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	10
Clock To:	1
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	S07
Within 8" of Joint:	YES
Remarks:	Wandering

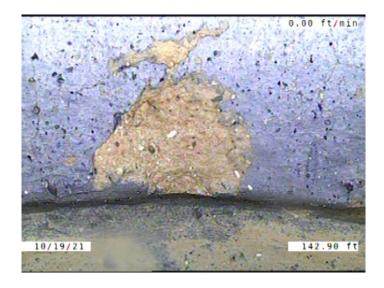

Code: Description:	SSS Surface Damage Surface Spalling
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	142.9 2 0 12 YES




Code: MWLS Description: **Miscellaneous Water Level Sag** Distance (ft): 142.9 Structural Grade: 2 O&M Grade: 0 Clock Start/From: Clock To: 1st Value: 2nd Value: 15.000 Value Percent: Continuous Index: F06

NO

Within 8" of Joint:


Remarks:

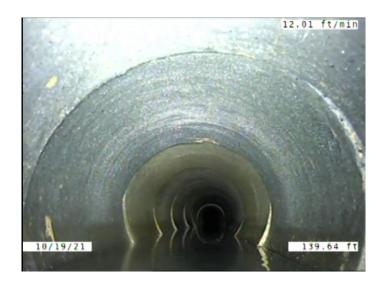

Code: Description:	CM Crack Multiple
Distance (ft):	153.7
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	10
Clock To:	1
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	F07
Within 8" of Joint:	YES
Remarks:	Wandering




Code: MMC Description: **Miscellaneous Material Change** Distance (ft): 157.7 Structural Grade: 0 O&M Grade: 0 Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: NO VCP TO PVC Remarks:

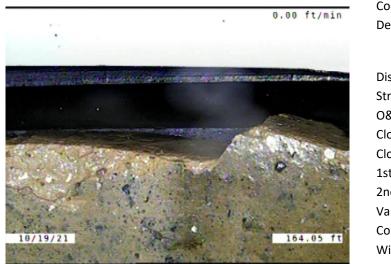

in	Code:	ММС
111	Description:	Miscellaneous Material Change
	Distance (ft):	164.0
	Structural Grade:	0
	O&M Grade:	0
	Clock Start/From:	
1	Clock To:	
	1st Value:	
	2nd Value:	
	Value Percent:	
TT	Continuous Index:	
	Within 8" of Joint:	NO
	Remarks:	ΡVC ΤΟ VCP



Code:	DSF
Description:	Deposits Settled Fine
Distance (ft):	165.5
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	5
Clock To:	7
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	F01
Within 8" of Joint:	YES
Remarks:	

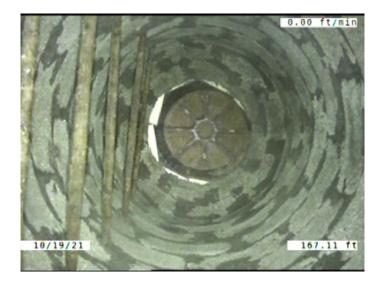

Code: Description:	AMH Manhole
Distance (ft):	167.1
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-503-016