

Profile/Ph	oto Observatior	n Report				RedZone
Date: Pipe Length (ft P.O.#: Customer:	04/05/2018 :): 133.3	Weather: Owner: Surveyor: Clean Date:	NA Jen Costello 01/01/1900		Coding: Pre Clean: PSR: Shape:	PACP 6.0 No Pre-Cleaning P-608-032-033 C
Street:	FOXCROFT STREET	ſ	Flow Control:		Not Controlled	
City:	Hobart, IN		Year Renewed:			
Location:	Yard		Tape/Media #:			
Purpose:	Routine Assessme	nt	Dia/Height:		12"	
Use:	Sanitary		Material:		PVC	
Drain Area:	NA		Lining:			
Category:	NA					
Comment:	Flow direction is n	narked wrong.				
Location Detai	ls:		Direction of Sur	rvey:	Downstream	
US MH:	M-608-033	DS MH:	M-608-032	Total	Length Surveyed (ft):	130.5
D&M Index:	2.00	O&M Quick:	28	00	O&M Rating:	16.00
Structural Index:	0.00	Structural Q	uick: 00	00	Structural Rating:	0.00
Overall Index:	2.00	Overall Quic	k: 28	00	Overall Rating:	16.00



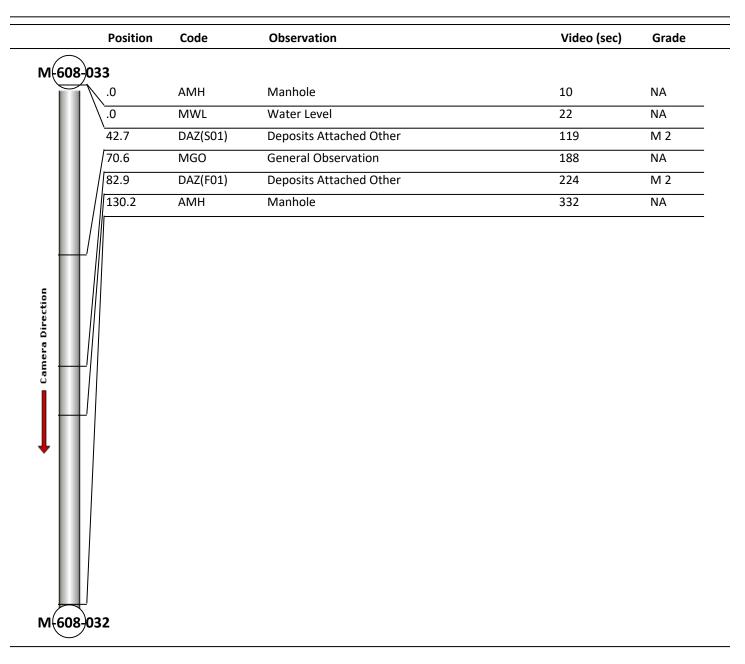

Code:	АМН
Description:	Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-608-033

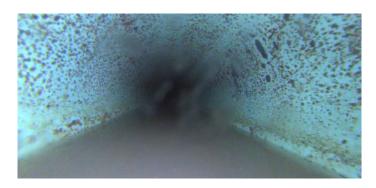

Code: MWL Description: Water Level

Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	20.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code:	DAZ
Description:	Deposits Attached Other

Distance (ft):	42.7
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	S01
Within 8" of Joint:	NO
Remarks:	



Code:MGODescription:General Observation

Distance (ft):	70.6
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	<b>REAR CAMERA</b>

Code:

Description:



Distance (ft):	82.9
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	F01
Within 8" of Joint:	NO
Remarks:	

DAZ

**Deposits Attached Other** 



Code:AMHDescription:Manhole

Distance (ft):	130.2
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-608-032