Date:	09/17/2021	Weather:		Coding:	PACP 7.0
Pipe Length (ft)	256.6	Owner:	City of Hobart	Pre Clean:	Heavy Cleaning
P.O.#:	YES502259	Surveyor:	S. Bucklin	PSR:	P-503-054-055
Customer:	City of Hobart	Clean Date:	08/24/2021	Shape:	С
Street:	North Guyer Stree	t	Flow Control:	Not Controlled	
City:	Hobart, IN		Year Renewed:		
Location:	Local rural streets	with light traffic	, t Tape/Media #:		
Purpose:	Routine Assessme	nt	Dia/Height:	10"	
Use:	Sanitary Sewage P	ipe	Material:	VCP	
Drain Area:			Lining:	None	
Category:	NA				
Comment:					
Location Details	:		Direction of Surv	ey: Downstream	
US MH:	M-503-054	DS MH:	M-503-055	Total Length Surveyed (ft)	: 256.6
)&M Index:	1.98	O&M Quick:	312	O&M Rating:	107.00
Structural Index:	2.50	Structural Qu	44.22		10.00
Overall Index:	2.02	Overall Quic	44.24		117.00

	Position	Code	Observation	Video (sec)	Grade
503-0	54				
	.0	AMH	Manhole	1	NA
	.0	MWL	Miscellaneous Water Level	65	NA
=	2.6	DAE	Deposits Attached Encrustation	131	M 2
	17.6	DAE	Deposits Attached Encrustation	219	M 2
	22.7	DAE(S01)	Deposits Attached Encrustation	274	M 2
ш.	33.7	TF	Tap Factory	361	NA
	63.9	CS	Crack Spiral	493	S 2
	63.9	ISB	Infiltration Stain Barrel	516	M 1
	75.8	TF	Tap Factory	580	NA
	91.1	OBZ	Obstruction Other	656	M 2
	91.7	FM	Fracture Multiple	753	S 4
ш.	92.8	TFD	Tap Factory Defective	777	M 3
	130.1	TF	Tap Factory	901	NA
	166.4	CS	Crack Spiral	1073	S 2
	/ 172.1	TFA	Tap Factory Activity	1115	NA
++/	213.3	RFJ	Roots Fine Joint	1284	M 1
	219.2	TF	Tap Factory	1329	NA
	253.7	CS	Crack Spiral	1500	S 2
	253.7	DAE	Deposits Attached Encrustation	1534	M 2
	256.3	DAE(F01)	Deposits Attached Encrustation	1567	M 2
\vdash	256.6	AMH	Manhole	1638	NA




Code: Description:	AMH Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-503-054

Wednesday, December 8, 2021

M(503)055




Code:	MWL Miscellaneous Water Level
Description:	wiscenaneous water Lever
Dictored (ft):	0
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

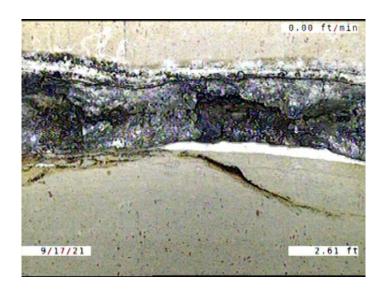

Code: Description:	DAE Deposits Attached Encrustation
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	2.6 0 2 7 5 5.000
Within 8" of Joint: Remarks:	YES




Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	17.6
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

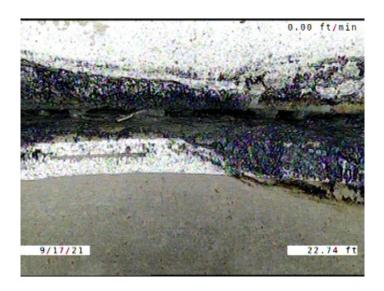


Code: Description:	DAE Deposits Attached Encrustation
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	22.7 0 2 8 4 5.000 S01 YES



Code:	TF
Description:	Tap Factory
Distance (ft):	33.7
Distance (ft):	55.7
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	11
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

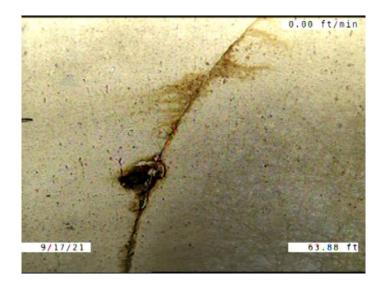

Code: Description:	CS Crack Spiral
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	63.9 2 0 11 1 YES

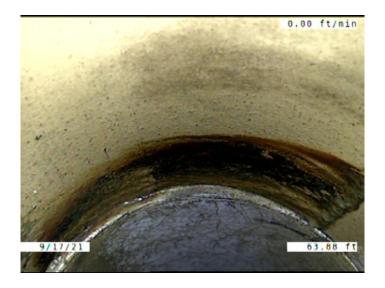

Code: Description:	ISB Infiltration Stain Barrel
Distance (ft):	63.9
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	8
Clock To:	12
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	TF Tap Factory
Distance (ft):	75.8
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	11
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code:	OBZ
Description:	Obstruction Other
Distance (ft):	91.1
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	5
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	TP AND RAGS



Code: Description:	FM Fracture Multiple
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	91.7 4 0 12 12
Remarks:	TES




Code:	TFD
Description:	Tap Factory Defective
Distance (ft):	92.8
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	1
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	Defective

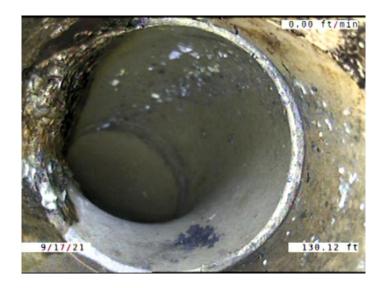

Code: Description:	TF Tap Factory
Distance (ft):	130.1
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	11
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code:	CS
Description:	Crack Spiral
Distance (ft):	166.4
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	3
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

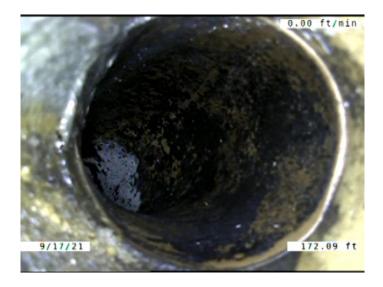


Code: Description:	TFA Tap Factory Activity
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	172.1 0 0 11 4.000 YES




RFJ
Roots Fine Joint
213.3
0
1
11
2
YES

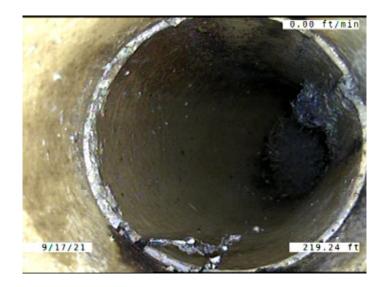

Code: Description:	TF Tap Factory
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value:	219.2 0 0 1 4.000
2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	YES ROOTS GROWING IN THE TAP

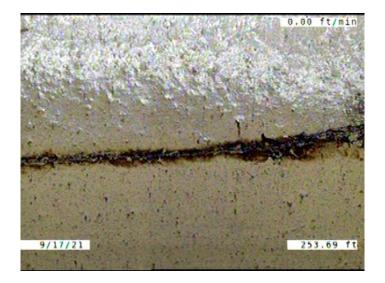

Code:	CS
Description:	Crack Spiral
Distance (ft):	253.7
Structural Grade:	2
	-
O&M Grade:	0
Clock Start/From:	10
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

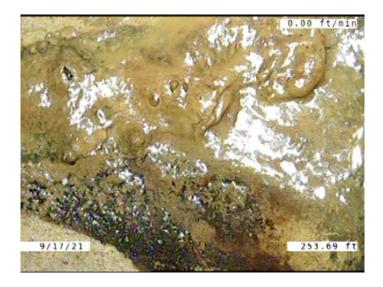

Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	253.7
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	7
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: DAE Description: **Deposits Attached Encrustation** Distance (ft): 256.3 Structural Grade: 0 O&M Grade: 2 Clock Start/From: 8 Clock To: 4 1st Value: 2nd Value: 5.000 Value Percent: Continuous Index: F01

YES



Code: Description:	AMH Manhole
Distance (ft):	256.6
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-503-055

Within 8" of Joint:

Remarks: