Profile/Photo Observation Report



Date: 04/22/2018 Weather: Coding: PACP 6.0

Pipe Length (ft): 305.6 Owner: NA Pre Clean: No Pre-Cleaning
P.O.#: Surveyor: Erik Redinger PSR: P-504-054-053

Customer: Clean Date: 01/01/1900 Shape: C

Street: FOXCROFT STREET Flow Control: Not Controlled

City: Hobart, IN Year Renewed: Location: Light Highway Tape/Media #:

Purpose: Routine Assessment Dia/Height: 12"
Use: Sanitary Material: VCP

Drain Area: NA Lining:

Category: NA

Comment: P_C at 46 ft roots. Flow direction wrong

Location Details: Direction of Survey: **Downstream**

US MH: M-504-053 DS MH: M-504-054 Total Length Surveyed (ft): 47.1

1.50 3121 9.00 O&M Index: O&M Quick: O&M Rating: 3.00 3100 3.00 Structural Quick: Structural Rating: Structural Index: 1.71 3221 12.00 Overall Quick: Overall Rating: Overall Index:

	Position	Code	Observation	Video (sec)	Grade
504-05	53				
	.0	AMH	Manhole	10	NA
	\ <u>.0</u>	MWL	Water Level	21	NA
ш	17.4	SAV	Surface Aggregate Visible	68	S 3
ш	28.6	RFJ(S01)	Roots Fine Joint	102	M 1
ш	46.3	RFJ(F01)	Roots Fine Joint	149	M 1
	46.3	TFD	Tap Factory Defective	160	M 2
	46.3	RML	Roots Medium Lateral	171	M 3
	47.1	MSA	Abandoned Survey	184	NA
Ш					

Code:



Manhole
.0
0
0
NO
M-504-053

 AMH



Code: MWL

Description: Water Level

Distance (ft): .0
Structural Grade: 0
O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value:

Value Percent:

Continuous Index:

Within 8" of Joint:

Remarks:

10.000

NO

veillaiks.

Code: SAV

Description: Surface Aggregate Visible

Distance (ft): 17.4
Structural Grade: 3
O&M Grade: 0
Clock Start/From: 7
Clock To: 5
1st Value:
2nd Value:

Continuous Index: Within 8" of Joint:

Value Percent:

Remarks:



Code: RFJ

Description: Roots Fine Joint

Distance (ft): 28.6
Structural Grade: 0

O&M Grade: 1


Clock Start/From: 7

Clock To: 5

1st Value: 2nd Value: Value Percent:

Continuous Index: **S01**Within 8" of Joint: **YES**

Remarks:

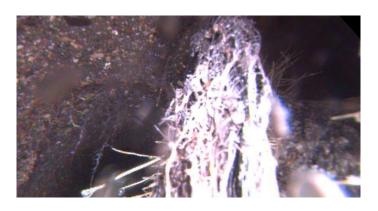

Code: RFJ

Description: Roots Fine Joint

Distance (ft): 46.3
Structural Grade: 0
O&M Grade: 1
Clock Start/From: 7
Clock To: 5
1st Value:
2nd Value:
Value Percent:
Continuous Index: F01

Within 8" of Joint: YES

Remarks:



Code: **TFD**

Description: Tap Factory Defective

Distance (ft): 46.3
Structural Grade: 0

O&M Grade: 2


Clock Start/From: 2

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks: RML

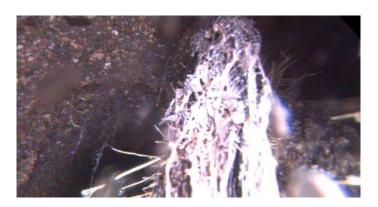

Code: RML

Description: Roots Medium Lateral

Distance (ft): 46.3
Structural Grade: 0
O&M Grade: 3
Clock Start/From: 2


Clock To: 1st Value: 2nd Value:

Value Percent: 10.000

Continuous Index:

Within 8" of Joint: NO

Remarks:

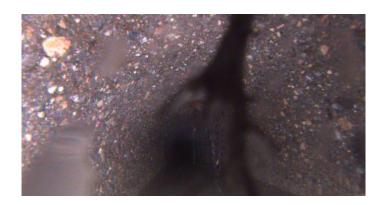

Code: MSA

Description: Abandoned Survey

Distance (ft): 47.1
Structural Grade: 0

O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent:

Continuous Index:

Within 8" of Joint: NO Remarks: RML