## **Profile/Photo Observation Report**

	•				ROBOTICS
11/05/2021	Weather:			Coding:	PACP 7.0
330.0	Owner:	City of Ho	bart	Pre Clean:	Heavy Cleaning
YES502259	Surveyor:	S. Bucklin	1	PSR:	P-504-057-056
City of Hobart	Clean Date:	11/04/20	21	Shape:	с
North Wilson Street		Flow Contr	ol:	Not Controlled	
Hobart, IN		Year Renew	ved:		
Alley		Tape/Medi	a #:		
<b>Routine Assessment</b>		Dia/Height	:	12"	
Sanitary Sewage Pipe	9	Material:		VCP	
		Lining:		None	
NA					
		Direction o	f Survey:	Downstream	
1-504-057	DS MH:	M-504-056		Total Length Surveyed (ft):	233.0
1.80	O&M Quick:		5141	O&M Rating:	164.00
3.49	 Structural Qu	uick:	534B	Structural Rating:	122.00
2.27	 Overall Quick		544B	Overall Rating:	286.00
	330.0 YES502259 City of Hobart North Wilson Street Hobart, IN Alley Routine Assessment Sanitary Sewage Pipe NA 1-504-057 <u>1.80</u> 3.49	330.0Owner:YES502259Surveyor:City of HobartClean Date:North Wilson StreetClean Date:Hobart, INAlleyRoutine AssessmentSanitary Sewage PipeNADS MH:1.504-057DS MH:1.80O&M Quick:3.49Structural Quick:	330.0Owner:City of HoYES502259Surveyor:S. BucklinCity of HobartClean Date:11/04/20North Wilson StreetFlow ContrHobart, INYear RenewAlleyTape/MediRoutine AssessmentDia/HeightSanitary Sewage PipeMaterial:NADirection o1.504-057DS MH:M-504-0561.80O&M Quick:3.49Structural Quick:	330.0Owner: Surveyor: City of HobartCity of HobartYES502259 City of HobartSurveyor: Clean Date:Sucklin 11/04/2021North Wilson Street Hobart, IN Alley Routine Assessment Sanitary Sewage PipeFlow Control: Year Renewed: Tape/Media #: Dia/Height: Material: Lining:NADirection of Survey: M-504-0561.80 3.49O&M Quick: Structural Quick:5141 534B	330.0Owner:City of HobartPre Clean:YES502259Surveyor:S. BucklinPSR:City of HobartClean Date:11/04/2021Shape:North Wilson StreetFlow Control:Not ControlledHobart, INYear Renewed:AlleyTape/Media #:Routine AssessmentDia/Height:12"Sanitary Sewage PipeMaterial:VCPLining:NoneNoneNADirection of Survey:Downstream1.80O&M Quick:5141O&M Rating:3.49Structural Quick:534BStructural Rating:

	Position	Code	Observation	Video (sec)	Grade
504	-057				
$\mathbf{H}$	0	AMH	Manhole	1	NA
	0	MWL	Miscellaneous Water Level	11	NA
-	1.5	MGO	Miscellaneous General Observation	20	NA
	- 5.2	СМ	Crack Multiple	93	S 3
н	5.2	DAE	Deposits Attached Encrustation	123	M 2
H	5.2	CL	Crack Longitudinal	143	S 2
H	5.2	DAE	Deposits Attached Encrustation	164	M 2
	7.8	DAE	Deposits Attached Encrustation	227	M 2
н	10.7	SSS	Surface Damage Surface Spalling	268	S 2
н	10.7	SSS	Surface Damage Surface Spalling	294	S 2
	16.9	СМ	Crack Multiple	370	S 3
	16.9	DAE	Deposits Attached Encrustation	398	M 2
	16.9	DAE	Deposits Attached Encrustation	429	M 2
	20.0	FS	Fracture Spiral	495	S 3
H	20.0	DAE	Deposits Attached Encrustation	525	M 2
н	23.0	DAE	Deposits Attached Encrustation	567	M 2
	24.9	HSV	Hole Soil Visible	627	S 5
	34.1	SSS	Surface Damage Surface Spalling	694	S 2
	34.1	CM	Crack Multiple	713	S 3

Wednesday, January 19, 2022

**RedZone**<sup>®</sup>

34.1	SSS	Surface Damage Surface Spalling	732	S 2
34.1	СМ	Crack Multiple	752	S 3
37.2	FM(S01)	Fracture Multiple	835	S 4
40.0	DR(S02)	Deformed Rigid	902	S 4
42.2	RFB	Roots Fine Barrel	971	M 2
42.5	ТВІ	Tap Break-in Intruding	987	M 2
43.6	HSV	Hole Soil Visible	1062	S 5
43.6	DAE	Deposits Attached Encrustation	1093	M 2
46.2	RFJ	Roots Fine Joint	1162	M 1
52.1	RFJ	Roots Fine Joint	1238	M 1
64.6	HSV	Hole Soil Visible	1387	S 5
64.6	ISC	Infiltration Stain Connection	1417	M 1
64.6	IRB	Infiltration Runner Barrel	1434	M 4
65.1	ТВІ	Tap Break-in Intruding	1457	M 2
67.4	DR(F02)	Deformed Rigid	1493	S 4
82.4	RFJ	Roots Fine Joint	1612	M 1
85.5	RFJ	Roots Fine Joint	1658	M 1
85.7	FM(F01)	Fracture Multiple	1674	S 4
88.3	RFJ	Roots Fine Joint	1722	M 1
88.3	MWL	Miscellaneous Water Level	1738	NA
91.2	RFJ	Roots Fine Joint	1787	M 1
94.4	RMJ	Roots Medium Joint	1866	M 3
97.5	RFJ	Roots Fine Joint	1931	M 1
103.4	RFJ	Roots Fine Joint	2012	M 1
104.1	SSS	Surface Damage Surface Spalling	2058	S 2
104.1	RMC	Roots Medium Connection	2077	M 3
104.1	TBI	Tap Break-in Intruding	2104	M2
105.2	DSF(S03)	Deposits Settled Fine	2125	M2
109.6	RFJ(SO4)	Roots Fine Joint	2187	M 1
110.7	OBM	Obstruction Pipe Material in Invert	2239	M 2
116.8	TBI	Tap Break-in Intruding	2320	M 2
149.5	RMJ	Roots Medium Joint	2502	M 3
157.6	В	Broken	2598	S 4
158.7	DAE	Deposits Attached Encrustation	2645	M 2
160.7	RMC	Roots Medium Connection	2698	MB
160.7	ТВІ	Tap Break-in Intruding	2738	M 2
160.8	СМ	Crack Multiple	2778	S 3
167.7	RMJ	Roots Medium Joint	2841	MB
171.2	RMJ	Roots Medium Joint	2889	MB
172.4	RMC	Roots Medium Connection	2932	M 3
173.2	TBD	Tap Break-in/Hammer Defective	2965	MB
174.5	OBM	Obstruction Pipe Material in Invert	3045	M 2

Wednesday, January 19, 2022

190.6	SSS	Surface Damage Surface Spalling	3174	S 2
204.6	FM	Fracture Multiple	3274	S 4
207.1	В	Broken	3307	S 4
207.3	RBB	Roots Ball Barrel	3338	M 5
209.3	TBD	Tap Break-in/Hammer Defective	3380	M 3
222.4	RMJ	Roots Medium Joint	3471	M 3
224.2	TBI	Tap Break-in Intruding	3504	M 2
//231.6	RMJ	Roots Medium Joint	3599	M 3
_// 231.7	FS	Fracture Spiral	3634	S 3
_/ // 232.9	RFJ(F04)	Roots Fine Joint	3660	M 1
// 232.9	DSF(F03)	Deposits Settled Fine	3678	M 2
233.0	MSA	Miscellaneous Survey Abandoned	3698	NA





Code: Description:	AMH Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-504-057




Code: Description:	MWL Miscellaneous Water Level
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	


Wednesday, January 19, 2022




Code:	MGO
Description:	Miscellaneous General Observation
Distance (ft):	1.5
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	DROP INTO THE MANHOLE. HAD TO START IN THE PIPE.

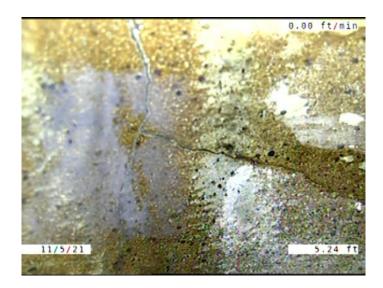


Code: Description:	CM Crack Multiple
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	5.2 3 0 7 12 YES
Remarks:	

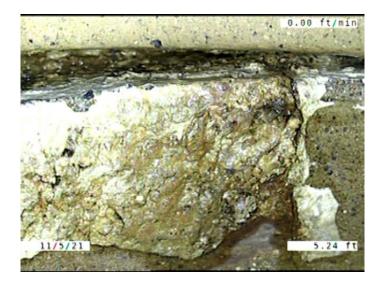


Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	5.2
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	8
Clock To:	12
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

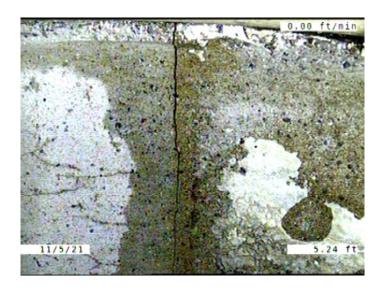

Code: Description:	CL Crack Longitudinal
Distance (ft):	5.2
Structural Grade:	2
	-
O&M Grade:	0
Clock Start/From:	1
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

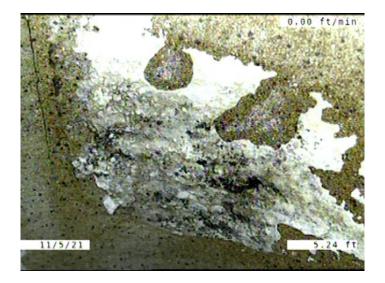

Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	5.2
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	1
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

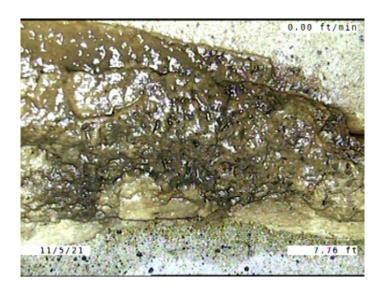


Code: Description:	DAE Deposits Attached Encrustation
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value:	7.8 0 2 8 5
2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	5.000 YES




Code: Description:	SSS Surface Damage Surface Spalling
Distance (ft):	10.7
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	5
Clock To:	7
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	

YES


Within 8" of Joint:

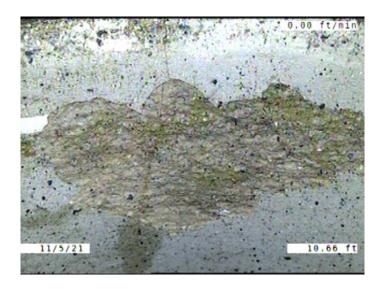


Code: Description:	SSS Surface Damage Surface Spalling
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	10.7 2 0 10 11 YES

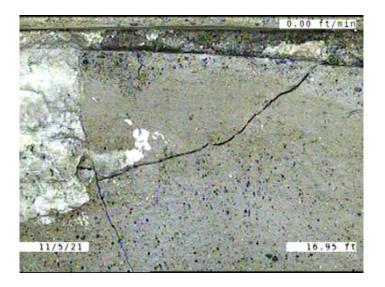


Code:	СМ
Description:	Crack Multiple
Distance (ft):	16.0
Distance (ft):	16.9
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	11
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

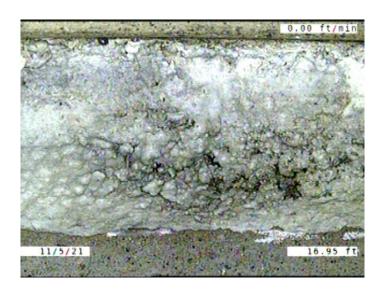


Code: Description:	DAE Deposits Attached Encrustation
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	16.9 0 2 8 11 5.000 YES
Remarks:	YES

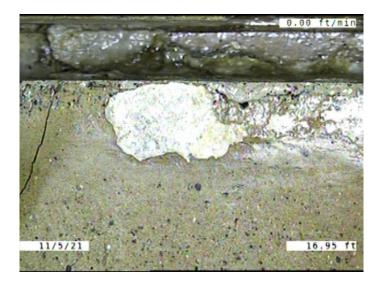


Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	16.9
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	3
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

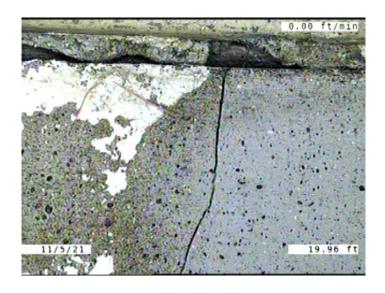


Code: Description:	FS Fracture Spiral
Distance (ft):	20.0
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	8
Clock To:	11
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

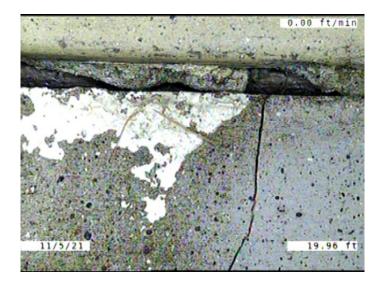


Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	20.0
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	9
Clock To:	11
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

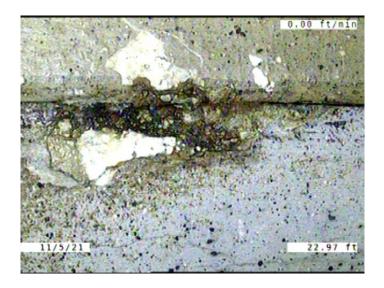


Code: Description:	DAE Deposits Attached Encrustation
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent:	23.0 0 2 8 9 5.000
Continuous Index: Within 8" of Joint: Remarks:	YES

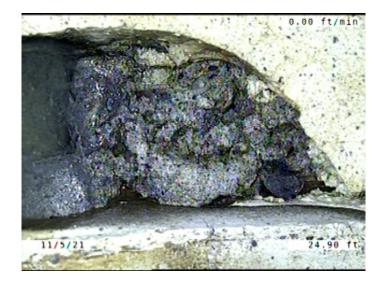


Code:	HSV
Description:	Hole Soil Visible
Distance (ft):	24.9
Structural Grade:	5
O&M Grade:	0
Clock Start/From:	5
Clock To:	9
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	INSIDE OF THE JOINT

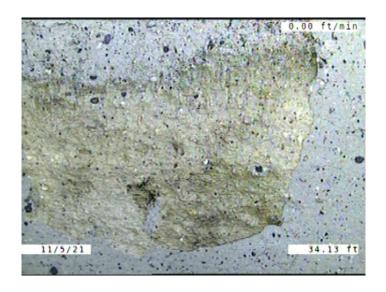


Code: Description:	SSS Surface Damage Surface Spalling
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent:	34.1 2 0 2 3
Continuous Index: Within 8" of Joint: Remarks:	YES

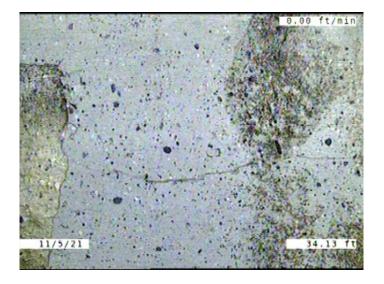


Code:	СМ
Description:	Crack Multiple
Distance (ft):	34.1
	• • • •
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	3
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

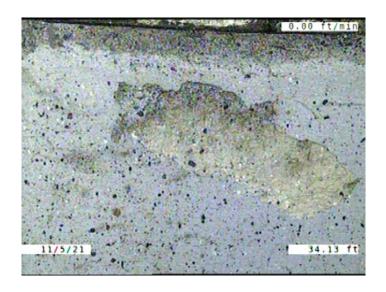


Code: Description:	SSS Surface Damage Surface Spalling
Distance (ft):	34.1
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	11
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

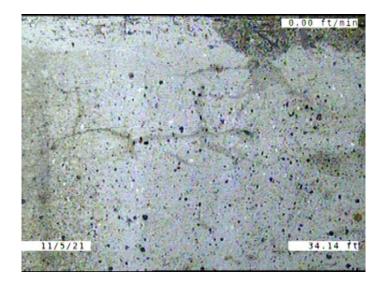

Code: Description:	CM Crack Multiple
Distance (ft):	34.1
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	9
Clock To:	10
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

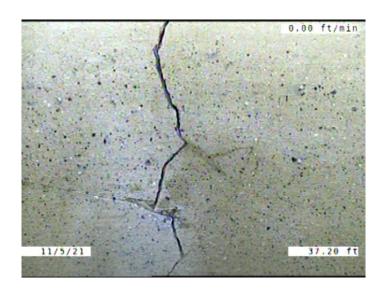


Code: Description:	FM Fracture Multiple
Distance (ft):	37.2
Structural Grade: O&M Grade:	4 0
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	S01
Within 8" of Joint:	YES
Remarks:	

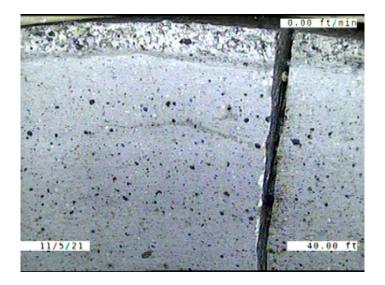

Code:	DR
Description:	Deformed Rigid
Distance (ft):	40.0
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	S02
Within 8" of Joint:	NO
Remarks:	




Code: Description:	RFB Roots Fine Barrel
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	42.2 0 2 11 3
Within 8" of Joint: Remarks:	ΝΟ

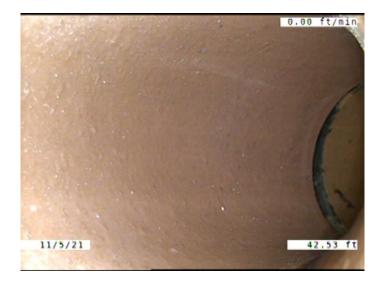


Code:	тві
Description:	Tap Break-in Intruding
Distance (ft):	42.5
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	1
Clock To:	
1st Value:	4.000
2nd Value:	1.000
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	HSV Hole Soil Visible
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent:	43.6 5 0 12 3
Continuous Index: Within 8" of Joint: Remarks:	YES

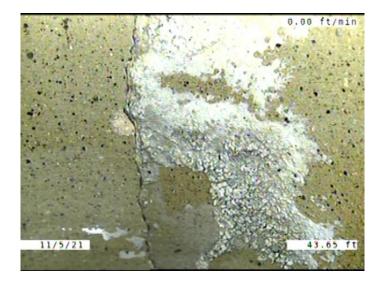

Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	43.6
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

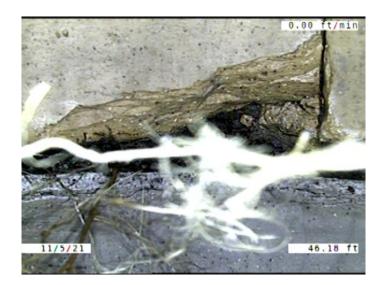


Code: Description:	RFJ Roots Fine Joint
Distance (ft):	46.2
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	9
Clock To:	11
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code:	RFJ
Description:	Roots Fine Joint
Distance (ft):	52.1
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	10
Clock To:	2
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	HSV Hole Soil Visible
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	64.6 5 0 12 1 YES SOIL VISIBLE

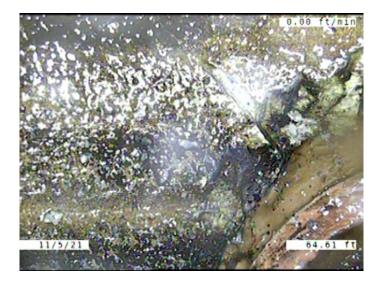

Code: Description:	ISC Infiltration Stain Connection
Distance (ft):	64.6
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	8
Clock To:	11
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

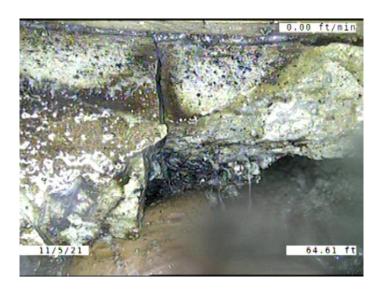


Code: Description:	IRB Infiltration Runner Barrel
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	64.6 0 4 12 YES
Rellidiks.	

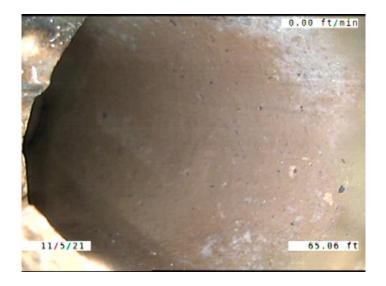

Code: Description:	TBI Tap Break-in Intruding
Distance (ft):	65.1
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	12
Clock To:	
1st Value:	4.000
2nd Value:	1.000
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	DR Deformed Rigid
Distance (ft):	67.4
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	F02
Within 8" of Joint:	NO
Remarks:	

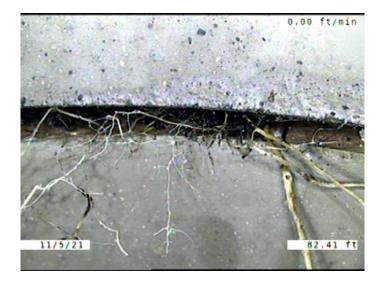


Code:	RFJ
Description:	<b>Roots Fine Joint</b>
Distance (ft):	82.4
<b>,</b> ,	-
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	11
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	RFJ Roots Fine Joint
Distance (ft):	85.5
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	10
Clock To:	2
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code:	FM
Description:	Fracture Multiple
Distance (ft):	85.7
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	F01
Within 8" of Joint:	YES
Remarks:	

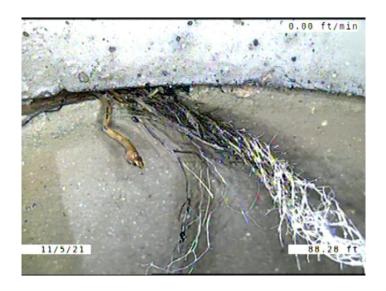

Code: Description:	RFJ Roots Fine Joint
Distance (ft):	88.3
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	10
Clock To:	11
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	MWL Miscellaneous Water Level
Distance (ft):	88.3
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

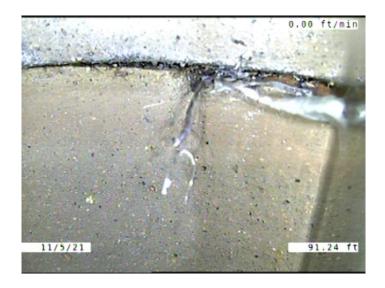

Code: Description:	RFJ Roots Fine Joint
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	91.2 0 1 3 YES
Remarks:	



RMJ Roots Medium Joint
94.4
0
3
9
4
10.000
YES

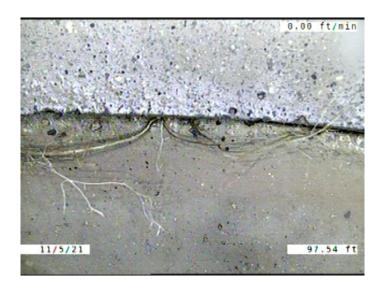


Code: Description:	RFJ Roots Fine Joint
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	97.5 0 1 11 3
Within 8" of Joint: Remarks:	YES



Code:	RFJ
Description:	<b>Roots Fine Joint</b>
Distance (ft):	103.4
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	1
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	SSS Surface Damage Surface Spalling
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	104.1 2 0 10 12 NO

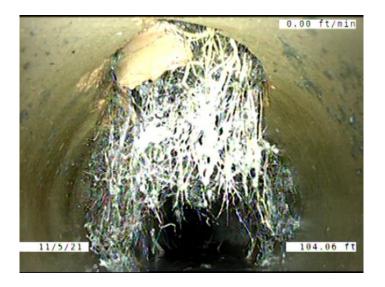

Code: Description:	RMC Roots Medium Connection
Distance (ft):	104.1
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	50.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	TBI Tap Break-in Intruding
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	104.1 0 2 12 4.000 1.000 YES



Code:	DSF
Description:	<b>Deposits Settled Fine</b>
Distance (ft):	105.2
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	5
Clock To:	7
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	S03
Within 8" of Joint:	YES
Remarks:	



Code: Description:	RFJ Roots Fine Joint
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	109.6 0 1 9 3 S04 YES



Code: Description:	OBM Obstruction Pipe Material in Invert
Distance (ft):	110.7
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	5
Clock To:	6
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES




Code: Description:	TBI Tap Break-in Intruding
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To:	116.8 0 2 1
1st Value: 2nd Value:	4.000 1.000
Value Percent: Continuous Index: Within 8" of Joint:	YES
Remarks:	CONSTANTLY RUNNING WATER. LOOKS TO BE 100% PLUGGED WITH




Code:	RMJ
Description:	Roots Medium Joint
Distance (ft):	149.5
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	B Broken
Distance (ft):	157.6
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	8
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

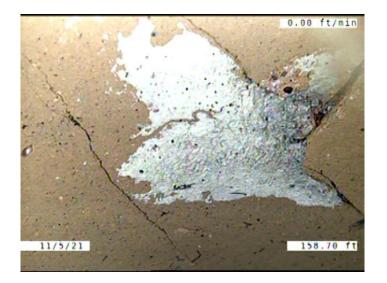

Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	158.7
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	9
Clock To:	11
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO

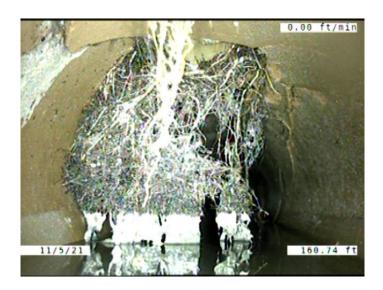

RMC Roots Medium Connection
160.7 0 3 10 1
50.000 NO

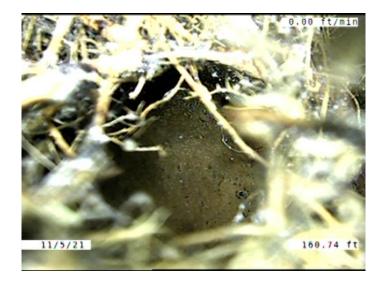


Code:	ТВІ
Description:	Tap Break-in Intruding
Distance (ft):	160.7
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	12
Clock To:	
1st Value:	4.000
2nd Value:	1.000
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	CM Crack Multiple
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	160.8 3 0 8 4
Within 8" of Joint: Remarks:	NO




Code: Description:	RMJ Roots Medium Joint
Distance (ft):	167.7
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	9
Clock To:	2
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

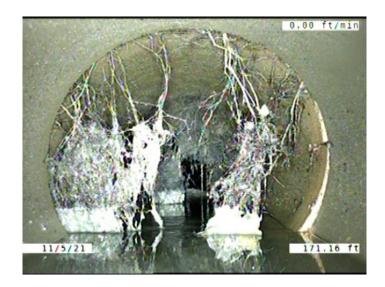

Code: Description:	RMJ Roots Medium Joint
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	171.2 0 3 8 2 15.000
Within 8" of Joint: Remarks:	YES

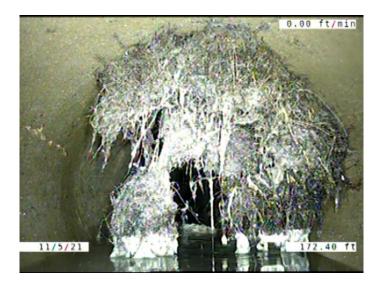

Code: Description:	RMC Roots Medium Connection
Distance (ft):	172.4
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	10
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	50.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

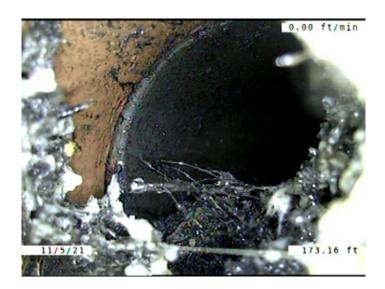

Code:	TBD
Description:	Tap Break-in/Hammer Defective
Distance (ft):	173.2
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	12
Clock To: 1st Value: 2nd Value: Value Percent:	4.000
Continuous Index:	YES
Within 8" of Joint:	ROOTS GROWING OUT OF THE TAP
Remarks:	AND INTO THE MAIN. ROOTS ALSO




Code: Description:	OBM Obstruction Pipe Material in Invert
Distance (ft):	174.5
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	4
Clock To:	8
1st Value:	
2nd Value:	
Value Percent:	10.000
Continuous Index:	

YES

Within 8" of Joint:




Code: Description:	SSS Surface Damage Surface Spalling
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	190.6 2 0 1

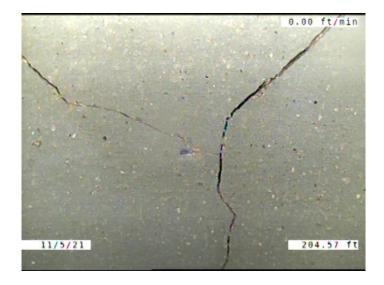


Code:	FM
Description:	Fracture Multiple
Distance (ft):	204.6
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	11
Clock To:	1
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	B Broken
Distance (ft):	207.1
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	12
Clock To:	1
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

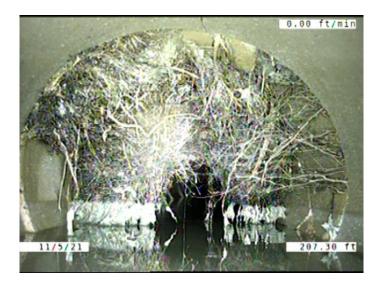


Code:	RBB
Description:	<b>Roots Ball Barrel</b>
Distance (ft):	207.3
Structural Grade:	0
O&M Grade:	5
Clock Start/From:	9
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	75.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

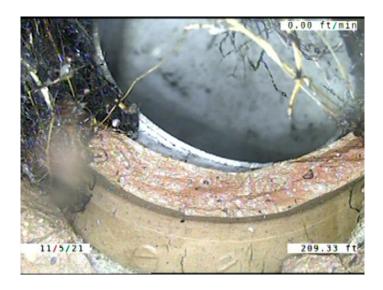


Code: Description:	TBD Tap Break-in/Hammer Defective
Distance (ft):	209.3
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	11
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	ROOTS GROWING AROUND IT AND INTO THE MAIN




Code: Description:	RMJ Roots Medium Joint
Distance (ft):	222.4
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	9
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

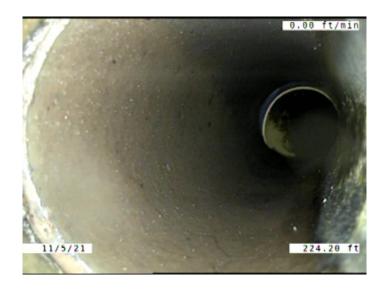

Code:	TBI
Description:	Tap Break-in Intruding
Distance (ft):	224.2
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	12
Clock To: 1st Value: 2nd Value:	4.000 2.000
Value Percent: Continuous Index: Within 8" of Joint: Remarks:	YES CONSTANTLY RUNNING WATER

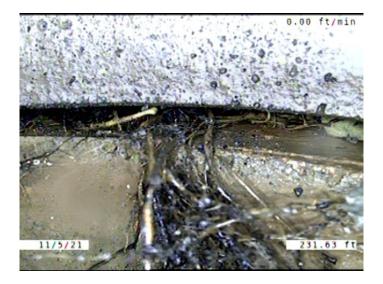

RMJ Roots Medium Joint
231.6
0
3
2
4
5.000
YES

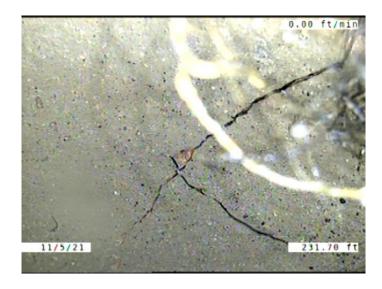

Code: Description:	FS Fracture Spiral
Distance (ft):	231.7
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	2
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code:	RFJ
Description:	<b>Roots Fine Joint</b>
Distance (ft):	232.9
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	9
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	F04
Within 8" of Joint:	YES
Remarks:	



Code: Description:	DSF Deposits Settled Fine
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	232.9 0 2 5 7 5.000 F03 YES
Remarks:	



Code: MSA Description: **Miscellaneous Survey Abandoned** Distance (ft): 233.0 Structural Grade: 0 0 O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: NO Remarks: MADE IT TO THE POINT OF OVERLAP. **REVERSAL COMPLETE.**