						ROBOTICS
Date:	04/08/2018	Weather:			Coding:	PACP 6.0
Pipe Length (ft)	):	Owner:	City of Hobart		Pre Clean:	No Pre-Cleaning
P.O.#:	21-1	Surveyor:	M. Pielacha		PSR:	M-504-076-M-504-075
Customer:	City of Hobart	Clean Date:			Shape:	С
Street:	Off Colorado Street	t	Flow Control:		Not Controlled	
City:	Hobart, IN		Year Renewed:			
Location:	Light Highway		Tape/Media #:		DEP 21	
Purpose:	Routine Assessmer	it	Dia/Height:		18"	
Use:	Sanitary		Material:		VCP	
Drain Area:			Lining:			
Category:	NA					
Comment:						
Location Detail	s:		Direction of Sur	vey:	Downstream	
US MH:	M-504-076	DS MH:	M-504-075	Total Leng	th Surveyed (ft):	158.8
0&M Index:	1.67	O&M Quick:	312	2 <mark>2</mark> 08	&M Rating:	10.00
tructural Index:	2.57	Structural Qu	uick: 342		ructural Rating:	18.00
)verall Index:	2.15	Overall Quick			verall Rating:	28.00

	Position	Code	Observation	Video (sec)	Grade
M-504	-076				
	.0	AMH	Manhole	0	NA
- 11	0	MWL	Water Level	10	NA
	6.9	TF	Tap Factory	27	NA
	-\\\\9.5	CL	Crack Longitudinal	47	S 2
	\\\11.7	CL	Crack Longitudinal	64	S 2
	21.1	CL	Crack Longitudinal	85	S 2
	46.7	RFJ	Roots Fine Joint	120	M 1
H	48.5	TFD	Tap Factory Defective	137	M 2
	59.5	RFJ	Roots Fine Joint	160	M 1
	61.6	RFJ	Roots Fine Joint	176	M 1
	68.3	TFD	Tap Factory Defective	204	M 2
		RML	Roots Medium Lateral	213	M 3
	76.8	ТВА	Tap Break-in Active	238	NA
3	87.5	TF	Tap Factory	260	NA
	118.4	TF	Tap Factory	304	NA
	/119.0	СМ	Crack Multiple	320	S 3
	// 120.1	ТВ	Tap Break-in	330	NA
	121.4	FL(S01)	Fracture Longitudinal	341	S 3
	136.0	FL(F01)	Fracture Longitudinal	365	S 3
	/ 158.8	AMH	Manhole	415	NA
VI <del>(</del> 504					



Code: Description:	AMH Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-504-076

Friday, October 1, 2021



Code:	MWL
Description:	Water Level
Distance (ft):	0
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	TF Tap Factory
Distance (ft):	6.9
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	2
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code:	CL
Description:	Crack Longitudinal
Distance (ft):	9.5
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	3
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	CL Crack Longitudinal
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	11.7 2 0 3 YES
Remarks:	



Code: Description:	CL Crack Longitudinal
Distance (ft):	21.1
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	9
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	RFJ Roots Fine Joint
Distance (ft):	46.7
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	12
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code:	TFD
Description:	<b>Tap Factory Defective</b>
Distance (ft):	48.5
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	1
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	Defective



Code:	RFJ
Description:	Roots Fine Joint
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	59.5 0 1 11



Code:	RFJ
Description:	<b>Roots Fine Joint</b>
	<b>64 6</b>
Distance (ft):	61.6
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	10
Clock To:	1
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code:	TFD
Description:	Tap Factory Defective
Distance (ft):	68.3
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	11
Clock To: 1st Value: 2nd Value: Value Percent:	4.000
Continuous Index: Within 8" of Joint: Remarks:	NO roots



Code: Description:	RML Roots Medium Lateral
Distance (ft):	68.3
Structural Grade:	0
O&M Grade:	3
Clock Start/From:	1
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	10.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	TBA Tap Break-in Active
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	76.8 0 0 12 4.000



Code: Description:	TF Tap Factory
Distance (ft):	87.5
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	1
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	TF Tap Factory
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	118.4 0 0 1 4.000 NO



Code:	СМ
Description:	Crack Multiple
Distance (ft):	119.0
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	12
Clock To:	1
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	TB Tap Break-in
Distance (ft):	120.1
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	12
Clock To:	
1st Value:	5.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	FL Fracture Longitudinal
Distance (ft):	121.4
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	12
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	S01
Within 8" of Joint:	YES
Remarks:	



Code: Description:	FL Fracture Longitudinal
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	136.0 3 0 12 F01 NO

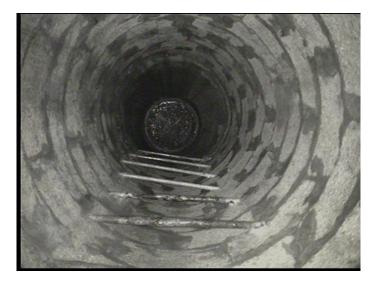

Code: Description:	AMH Manhole
Distance (ft):	158.8
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-504-075