
Profile/Ph	noto Observatio	n Report				RedZo
Date:	04/26/2018	Weather:			Coding:	PACP 6.0
Pipe Length (f	t):	Owner:	City of Hoba	nrt	Pre Clean:	No Pre-Cleaning
P.O.#:	95	Surveyor:	M. Pielacha		PSR:	P-505-016-015
Customer:	City of Hobart	Clean Date	2:		Shape:	с
Street:	3rd Street		Flow Control:		Not Controlled	
City:	Hobart, IN		Year Renewe	d:		
Location:	Light Highway		Tape/Media #	t:	DEP 95	
Purpose:	Routine Assessme	ent	Dia/Height:		18"	
Use:	Sanitary		Material:		СР	
Drain Area:			Lining:			
Category:	NA					
Comment:	YES501824 Subm	ital 2				
Location Detai	ils:		Direction of S	urvey:	Downstream	
US MH:	M-505-016	DS MH:	M-505-015	Tot	al Length Surveyed (ft):	310.9
D&M Index:	2.00	O&M Quick	2	300	O&M Rating:	6.00
Structural Index	3.00	Structural C	Quick:	коо	Structural Rating:	186.00
Overall Index:	2.95	Overall Qui		K23	Overall Rating:	192.00

		Position	Code	Observation	Video (sec)	Grade
M(505-016						
\ 		.0	AMH	Manhole	0	NA
	\\	.0	MWL	Water Level	8	NA
	$ \rangle$	1.3	SAV(S01)	Surface Aggregate Visible	18	S 3
		21.4	TBC	Tap Break-in Capped	53	M 2
		61.0	TFC	Tap Factory Capped	119	NA
		82.8	TBA	Tap Break-in Active	155	NA
-		103.4	TBC	Tap Break-in Capped	193	M 2
		182.2	TBC	Tap Break-in Capped	301	M 2
		230.1	TBA	Tap Break-in Active	375	NA
U		310.9	SAV(F01)	Surface Aggregate Visible	513	S 3
recti		310.9	AMH	Manhole	516	NA
Camera Direction						
Mfa	505-0:	15				



Code: Description:	AMH Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-505-016

Thursday, May 4, 2023

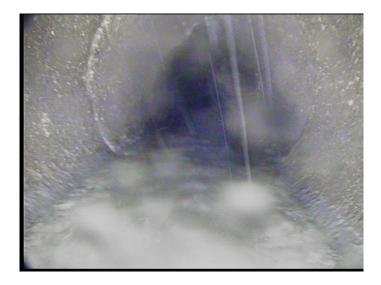

Code:	MWL
Description:	Water Level
Distance (ft):	.0
Structural Grade:	0
	•
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	10.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	SAV Surface Aggregate Visible
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	1.3 3 0 8 4 S01 YES
Remarks:	



TBC Tap Break-in Capped
21.4
0
2
2
4.000
NO



Code: Description:	TFC Tap Factory Capped
Distance (ft):	61.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	2
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



2




Code: Description:	TBC Tap Break-in Capped
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	103.4 0 2 2 4.000




Code: Description:	TBC Tap Break-in Capped
Distance (ft):	182.2
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	2
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	TBA Tap Break-in Active
Distance (ft): Structural Grade:	230.1 0
O&M Grade: Clock Start/From: Clock To:	0 12
1st Value: 2nd Value: Value Percent:	6.000
Continuous Index: Within 8" of Joint: Remarks:	NO

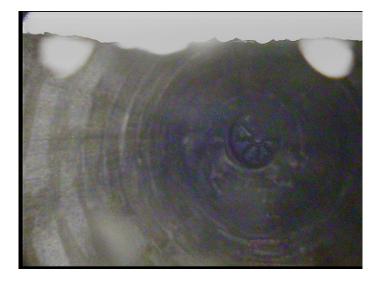

Code: SAV Description: Surface Aggregate Visible Distance (ft): 310.9 Structural Grade: 3 O&M Grade: 0 Clock Start/From: 8 Clock To: 4 1st Value: 2nd Value: Value Percent: Continuous Index: F01 Within 8" of Joint: NO

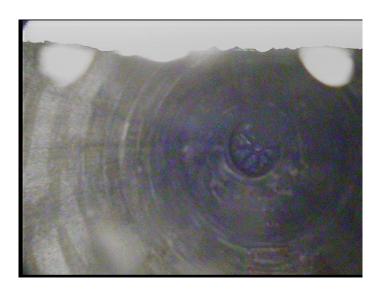

Code: Description:	AMH Manhole
Distance (ft):	310.9
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-505-015

Remarks: