
Profile/Ph	oto Observation	Report				RedZone
Date:	03/26/2018	Weather:			Coding:	PACP 6.0
Pipe Length (ft): 304.8	Owner:	NA		Pre Clean:	No Pre-Cleaning
P.O.#:		Surveyor:	Justin Goi	nzales	PSR:	P-507-067-068
Customer:		Clean Date	: 01/01/19	00	Shape:	С
Street:	FOXCROFT STREET		Flow Contro	ol:	Not Controlled	
City:	Hobart, IN		Year Renew	ved:		
Location:	Light Highway		Tape/Medi	a #:		
Purpose:	Routine Assessme	nt	Dia/Height:		8"	
Use:	Sanitary		Material:		PVC	
Drain Area:	NA		Lining:			
Category:	NA					
Comment:	Flow direction wro	ong				
Location Detail	ls:		Direction o	f Survey:	Downstream	
US MH:	M-507-067	DS MH:	M-507-068	Т	otal Length Surveyed (ft)	: 314.9
D&M Index:	2.00	O&M Quick	::	2300	O&M Rating:	6.00
Structural Index:	0.00	Structural C	Quick:	0000	Structural Rating:	0.00
Overall Index:	2.00	Overall Qui	ck:	2300	Overall Rating:	6.00

	Position	Code	Observation	Video (sec)	Grade
M-50	7-067				
\sim	.0	AMH	Manhole	11	NA
- 11	0.	MWL	Water Level	24	NA
- 11	41.5	TFD	Tap Factory Defective	120	M 2
- 11	83.8	TF	Tap Factory	220	NA
- 11	/140.0	TF	Tap Factory	347	NA
- 11	/ 168.7	TF	Tap Factory	418	NA
- 8	223.6	DAGS	Deposits Attached Grease	540	M 2
- 11	224.4	TF	Tap Factory	555	NA
- 11	225.5	DAGS	Deposits Attached Grease	570	M 2
5	241.7	TF	Tap Factory	616	NA
ecti	281.2	TF	Tap Factory	709	NA
Dir	314.9	AMH	Manhole	790	NA
Camera Direction					
M . 50	7 , 068				



Code: Description:	AMH Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-507-067

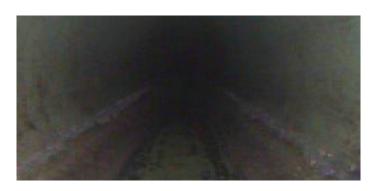

Code: MWL Description: Water Level

Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code:	TFD
Description:	Tap Factory Defective
Distance (ft):	41.5
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	3
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	DEPOSITS BLOCKING INSIDE TAP



Code:	TF
Description:	Tap Factory

83.8
0
0
10
4.000



Code: Description:	TF Tap Factory
Distance (ft):	140.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	2
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	



Code: Description:	TF Tap Factory
Distance (ft):	168.7
Structural Craday	•

Structural Grade:	0
O&M Grade:	0
Clock Start/From:	2
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	



Code:	DAGS
Description:	Deposits Attached Grease

Distance (ft):	223.6
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	3
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code:	TF
Description:	Tap Factory

Distance (ft):	224.4
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	10
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	




Code:	DAGS
Description:	Deposits Attached Grease

Distance (ft):	225.5
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	3
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code:	TF
Description:	Tap Factory
Distance (ft):	241.7
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	2
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	

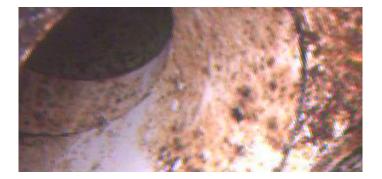

Code: Description:	TF Tap Factory
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	281.2 0 0 10 4.000
Within 8" of Joint: Remarks:	



Code:	AMH
Description:	Manhole

Distance (ft):	314.9
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-507-068