


Profile/Photo Observation Report




Date:	11/13/2021	Weather:		Coding:	PACP 7.0
Pipe Length (ft):	273.0	Owner:	City of Hobart	Pre Clean:	Heavy Cleaning
P.O.#:	YES502259	Surveyor:	Steven Bucklin	PSR:	P-604-003-002
Customer:	City of Hobart, IN (Red	Clean Date:	11/13/2021	Shape:	C

Street:	West Cleveland Avenue	Flow Control:	Not Controlled
City:	City of Hobart	Year Renewed:	
Location:	Local rural streets with light traffic, t	Tape/Media #:	
Purpose:	Routine Assessment	Dia/Height:	10"
Use:	Sanitary Sewage Pipe	Material:	VCP
Drain Area:		Lining:	None
Category:	NA		
Comment:			
Location Details:		Direction of Survey:	Downstream
US MH:	M-604-003	DS MH:	M-604-002
		Total Length Surveyed (ft):	84.0


O&M Index:	1.89	O&M Quick:	3126	O&M Rating:	17.00
Structural Index:	2.56	Structural Quick:	5143	Structural Rating:	41.00
Overall Index:	2.32	Overall Quick:	5143	Overall Rating:	58.00

	Position	Code	Observation	Video (sec)	Grade
M-604-003					
	.0	AMH	Manhole	2	NA
	.0	MWL	Miscellaneous Water Level	85	NA
	8.3	RMJ	Roots Medium Joint	182	M 3
	8.3	SMW	Surface Damage Missing Wall	196	S 5
	8.6	RPP	Point Repair Patch	235	NA
	9.0	TBI	Tap Break-in Intruding	254	M 2
	10.4	RFJ	Roots Fine Joint	299	M 1
	12.2	B	Broken	362	S 4
	14.6	B	Broken	442	S 4
	15.4	TBI	Tap Break-in Intruding	477	M 2
	18.3	SSS	Surface Damage Surface Spalling	520	S 2
	22.5	SSS	Surface Damage Surface Spalling	559	S 2
	31.1	TFC	Tap Factory Capped	615	NA
	35.3	SSS	Surface Damage Surface Spalling	655	S 2
	53.2	SSS	Surface Damage Surface Spalling	746	S 2
	54.1	SSS	Surface Damage Surface Spalling	769	S 2
	58.3	SSS	Surface Damage Surface Spalling	810	S 2
	59.4	ISJ	Infiltration Stain Joint	844	M 1
	61.6	DAE	Deposits Attached Encrustation	897	M 2
	61.6	SSS	Surface Damage Surface Spalling	921	S 2
	64.3	SSS	Surface Damage Surface Spalling	951	S 2
	65.7	FM	Fracture Multiple	1022	S 4
	67.7	DAE	Deposits Attached Encrustation	1085	M 2
	70.8	TFC	Tap Factory Capped	1122	NA
	74.8	DAE	Deposits Attached Encrustation	1174	M 2
	75.2	SSS	Surface Damage Surface Spalling	1201	S 2
	77.1	SSS	Surface Damage Surface Spalling	1245	S 2
	81.0	SSS	Surface Damage Surface Spalling	1296	S 2
	83.3	SSS	Surface Damage Surface Spalling	1344	S 2
	83.9	TBI	Tap Break-in Intruding	1370	M 2
	84.0	MSA	Miscellaneous Survey Abandoned	1384	NA
M-604-002					

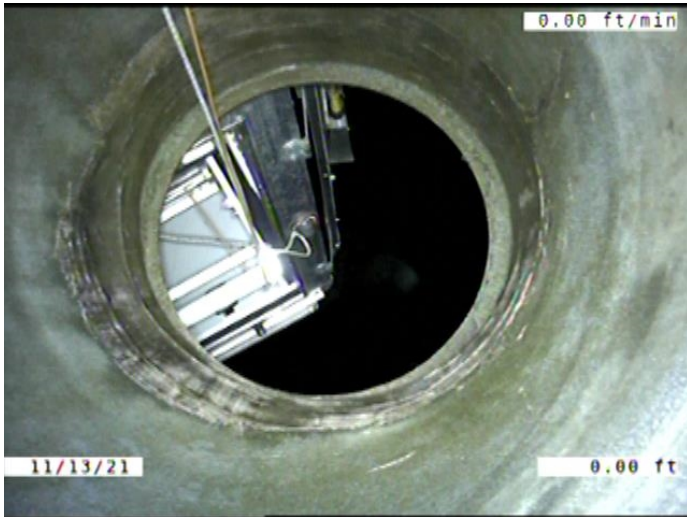

Code: **AMH**
Description: **Manhole**

Distance (ft): **.0**
Structural Grade: **0**
O&M Grade: **0**
Clock Start/From:
Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:
Within 8" of Joint: **NO**
Remarks: **M-604-003**

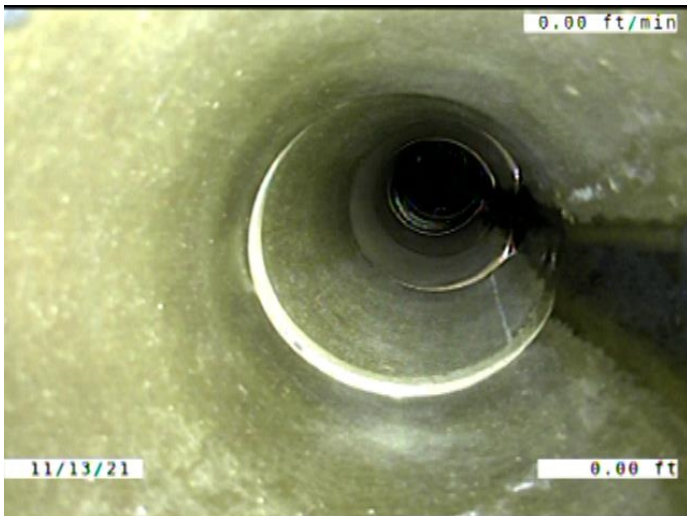

Code: **MWL**
Description: **Miscellaneous Water Level**

Distance (ft): **.0**
Structural Grade: **0**
O&M Grade: **0**
Clock Start/From:
Clock To:
1st Value:
2nd Value:
Value Percent: **5.000**
Continuous Index:
Within 8" of Joint: **NO**
Remarks:




Code: **RMJ**
Description: **Roots Medium Joint**

Distance (ft): **8.3**
Structural Grade: **0**
O&M Grade: **3**
Clock Start/From: **8**
Clock To: **4**
1st Value:
2nd Value:
Value Percent: **5.000**
Continuous Index:
Within 8" of Joint: **YES**
Remarks:




Code: **SMW**
Description: **Surface Damage Missing Wall**

Distance (ft): **8.3**
Structural Grade: **5**
O&M Grade: **0**
Clock Start/From: **3**
Clock To: **4**
1st Value:
2nd Value:
Value Percent:
Continuous Index:
Within 8" of Joint: **YES**
Remarks:

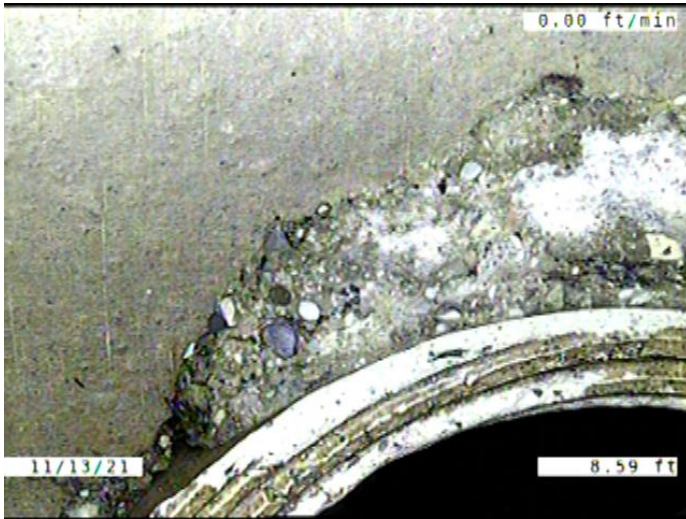

Code: **RPP**
 Description: **Point Repair Patch**

Distance (ft): **8.6**
 Structural Grade: **0**
 O&M Grade: **0**
 Clock Start/From: **8**
 Clock To: **12**
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks: **Concrete**

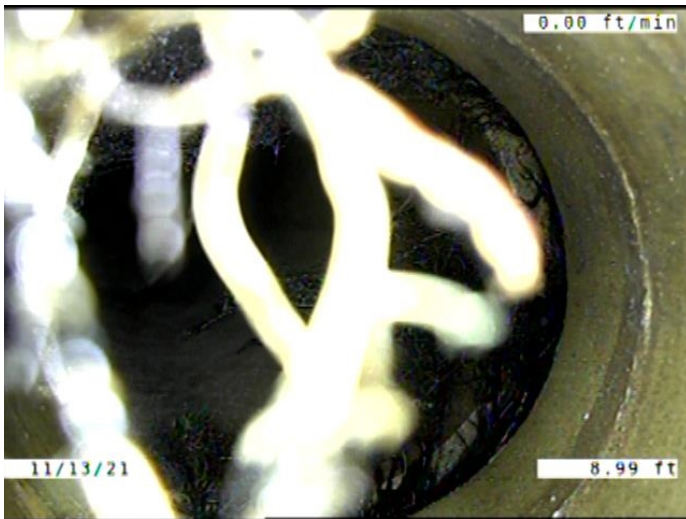

Code: **TBI**
 Description: **Tap Break-in Intruding**

Distance (ft): **9.0**
 Structural Grade: **0**
 O&M Grade: **2**
 Clock Start/From: **10**
 Clock To:
 1st Value: **6.000**
 2nd Value: **1.000**
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks: **ROOTS GROWING IN THE JOINTS**



Code: **RFJ**
 Description: **Roots Fine Joint**

Distance (ft): **10.4**
 Structural Grade: **0**
 O&M Grade: **1**
 Clock Start/From: **2**
 Clock To: **4**
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:




Code: **B**
 Description: **Broken**

Distance (ft): **12.2**
 Structural Grade: **4**
 O&M Grade: **0**
 Clock Start/From: **4**
 Clock To: **8**
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:




Code: **B**
Description: **Broken**

Distance (ft): **14.6**
Structural Grade: **4**
O&M Grade: **0**
Clock Start/From: **12**
Clock To: **3**
1st Value:
2nd Value:
Value Percent:
Continuous Index:
Within 8" of Joint: **YES**
Remarks:

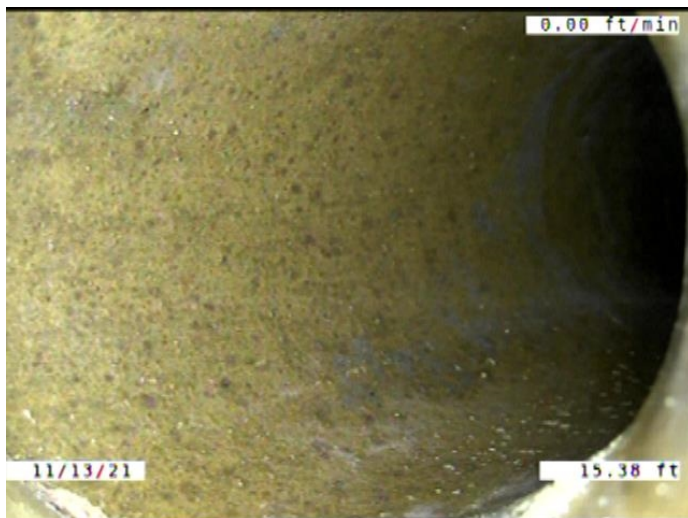

Code: **TBI**
Description: **Tap Break-in Intruding**

Distance (ft): **15.4**
Structural Grade: **0**
O&M Grade: **2**
Clock Start/From: **2**
Clock To:
1st Value: **6.000**
2nd Value: **3.000**
Value Percent:
Continuous Index:
Within 8" of Joint: **YES**
Remarks:

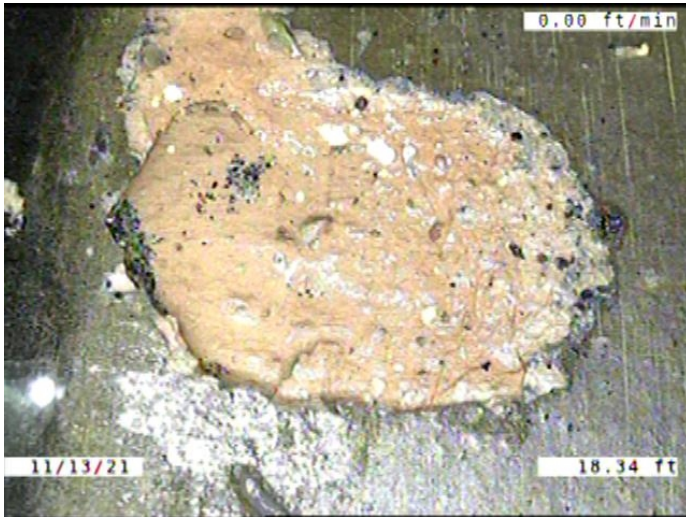


Code: **SSS**
Description: **Surface Damage Surface Spalling**

Distance (ft): **18.3**
Structural Grade: **2**
O&M Grade: **0**
Clock Start/From: **5**
Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:
Within 8" of Joint: **YES**
Remarks:



Code: **SSS**
Description: **Surface Damage Surface Spalling**

Distance (ft): **22.5**
Structural Grade: **2**
O&M Grade: **0**
Clock Start/From: **4**
Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:
Within 8" of Joint: **YES**
Remarks:

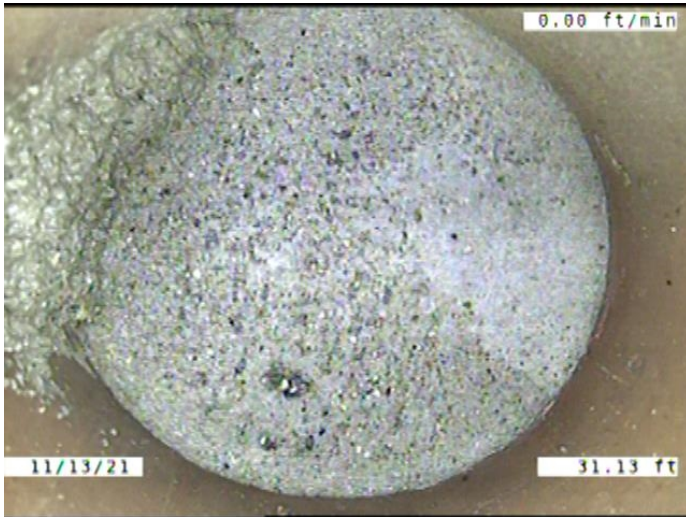

Code: **TFC**
Description: **Tap Factory Capped**

Distance (ft): **31.1**
Structural Grade: **0**
O&M Grade: **0**
Clock Start/From: **10**
Clock To:
1st Value: **6.000**
2nd Value:
Value Percent:
Continuous Index:
Within 8" of Joint: **YES**
Remarks:



Code: **SSS**
Description: **Surface Damage Surface Spalling**

Distance (ft): **35.3**
Structural Grade: **2**
O&M Grade: **0**
Clock Start/From: **1**
Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:
Within 8" of Joint: **YES**
Remarks:




Code: **SSS**
 Description: **Surface Damage Surface Spalling**

Distance (ft): **53.2**
 Structural Grade: **2**
 O&M Grade: **0**
 Clock Start/From: **4**
 Clock To:
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:




Code: **SSS**
 Description: **Surface Damage Surface Spalling**

Distance (ft): **54.1**
 Structural Grade: **2**
 O&M Grade: **0**
 Clock Start/From: **7**
 Clock To:
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:

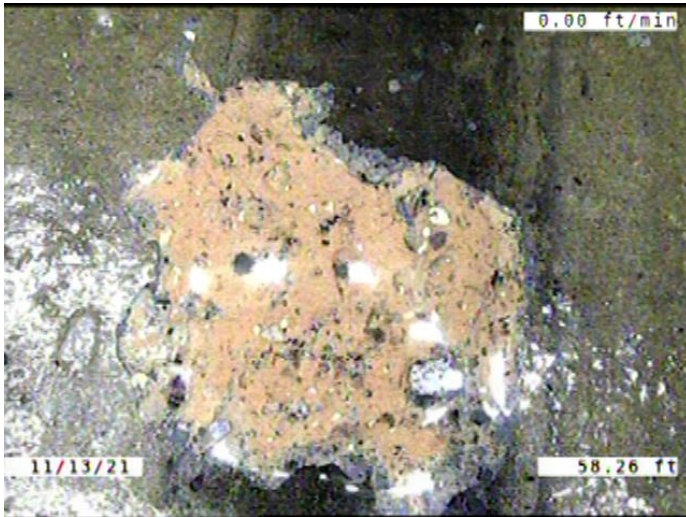


Code: **SSS**
 Description: **Surface Damage Surface Spalling**

Distance (ft): **58.3**
 Structural Grade: **2**
 O&M Grade: **0**
 Clock Start/From: **6**
 Clock To:
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:

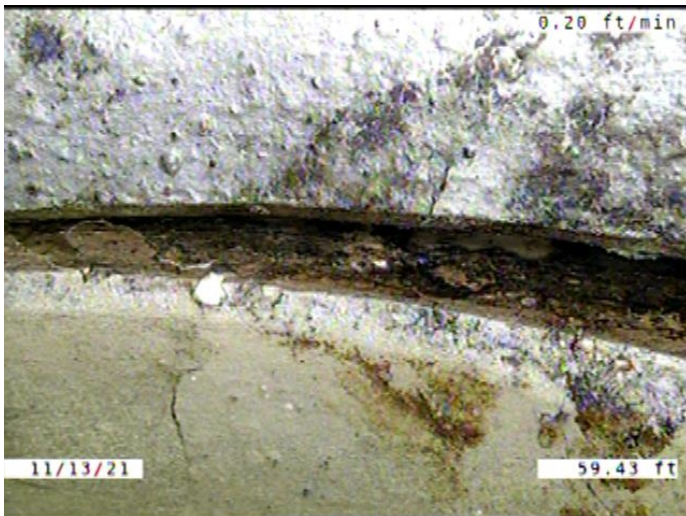

Code: **ISJ**
 Description: **Infiltration Stain Joint**

Distance (ft): **59.4**
 Structural Grade: **0**
 O&M Grade: **1**
 Clock Start/From: **2**
 Clock To: **5**
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:

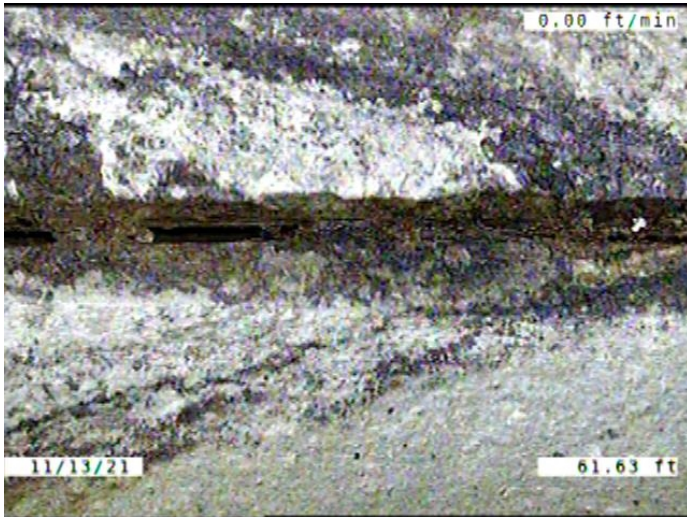

Code: **DAE**
 Description: **Deposits Attached Encrustation**

Distance (ft): **61.6**
 Structural Grade: **0**
 O&M Grade: **2**
 Clock Start/From: **8**
 Clock To: **4**
 1st Value:
 2nd Value:
 Value Percent: **5.000**
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:




Code: **SSS**
 Description: **Surface Damage Surface Spalling**

Distance (ft): **61.6**
 Structural Grade: **2**
 O&M Grade: **0**
 Clock Start/From: **4**
 Clock To: **5**
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:




Code: **SSS**
 Description: **Surface Damage Surface Spalling**

Distance (ft): **64.3**
 Structural Grade: **2**
 O&M Grade: **0**
 Clock Start/From: **5**
 Clock To:
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:

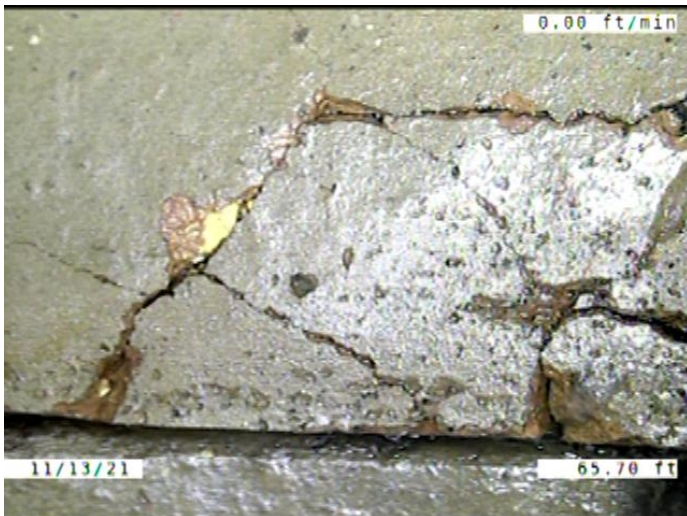


Code: **FM**
 Description: **Fracture Multiple**

Distance (ft): **65.7**
 Structural Grade: **4**
 O&M Grade: **0**
 Clock Start/From: **4**
 Clock To: **9**
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:

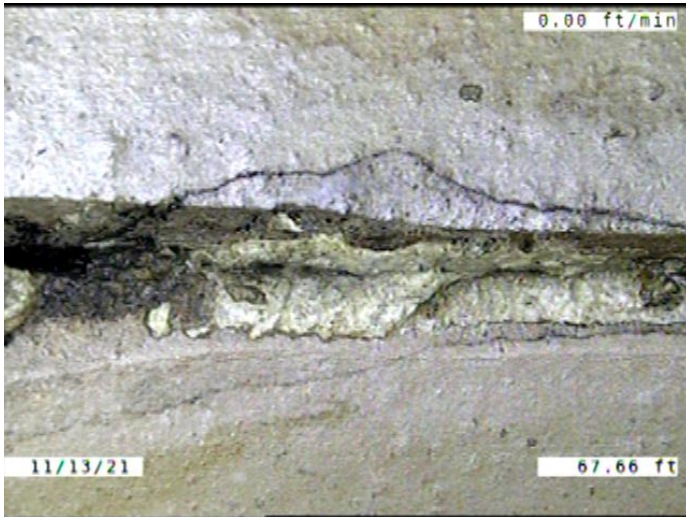


Code: **DAE**
Description: **Deposits Attached Encrustation**

Distance (ft): **67.7**
Structural Grade: **0**
O&M Grade: **2**
Clock Start/From: **9**
Clock To: **3**
1st Value:
2nd Value:
Value Percent: **5.000**
Continuous Index:
Within 8" of Joint: **YES**
Remarks:

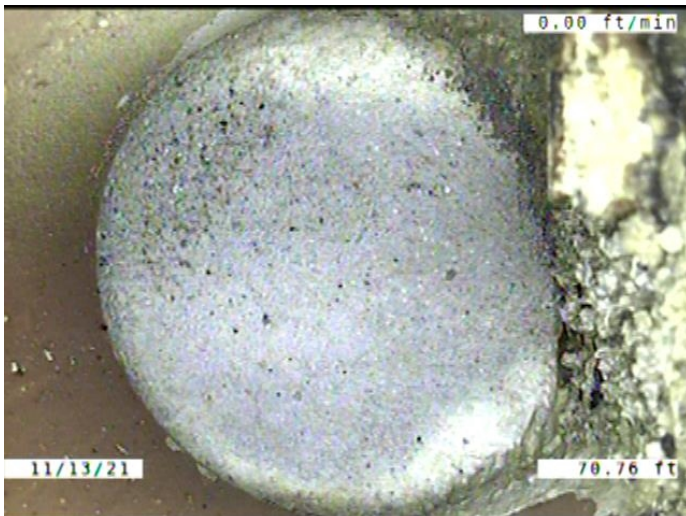


Code: **TFC**
Description: **Tap Factory Capped**

Distance (ft): **70.8**
Structural Grade: **0**
O&M Grade: **0**
Clock Start/From: **3**
Clock To:
1st Value: **6.000**
2nd Value:
Value Percent:
Continuous Index:
Within 8" of Joint: **YES**
Remarks: **ENCrustATION AROUND THE CAP**

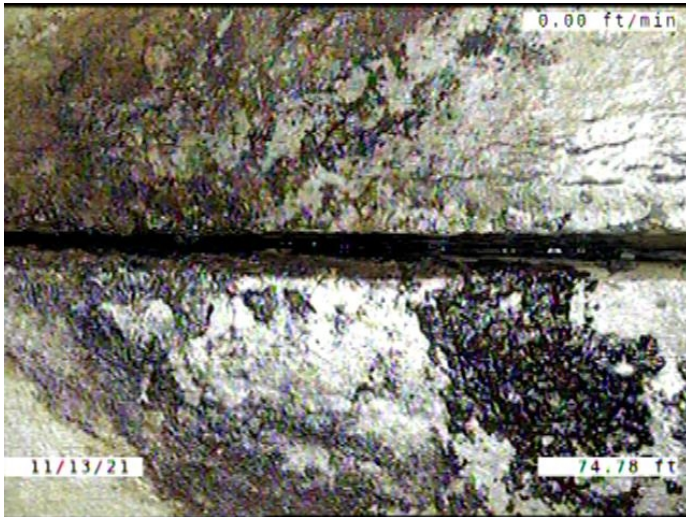


Code: **DAE**
 Description: **Deposits Attached Encrustation**

Distance (ft): **74.8**
 Structural Grade: **0**
 O&M Grade: **2**
 Clock Start/From: **7**
 Clock To: **9**
 1st Value:
 2nd Value:
 Value Percent: **5.000**
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:

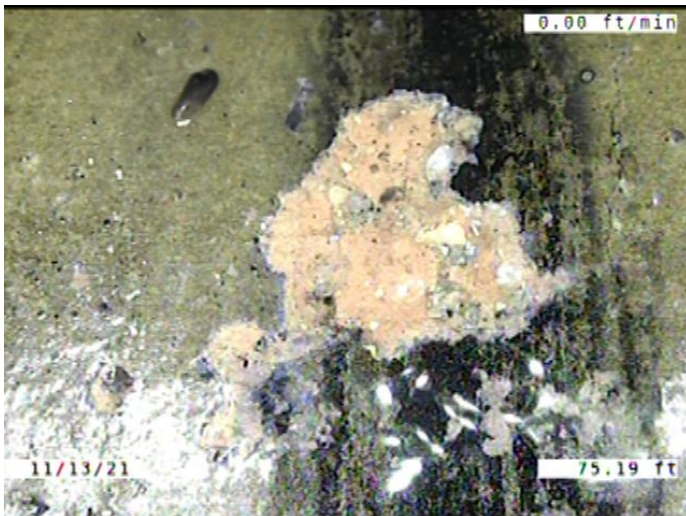


Code: **SSS**
 Description: **Surface Damage Surface Spalling**

Distance (ft): **75.2**
 Structural Grade: **2**
 O&M Grade: **0**
 Clock Start/From: **6**
 Clock To: **7**
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:

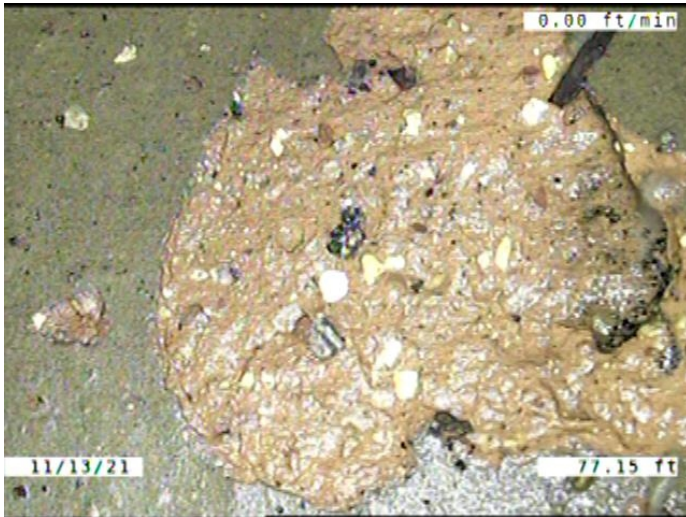


Code: **SSS**
 Description: **Surface Damage Surface Spalling**

Distance (ft): **77.1**
 Structural Grade: **2**
 O&M Grade: **0**
 Clock Start/From: **4**
 Clock To: **8**
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:

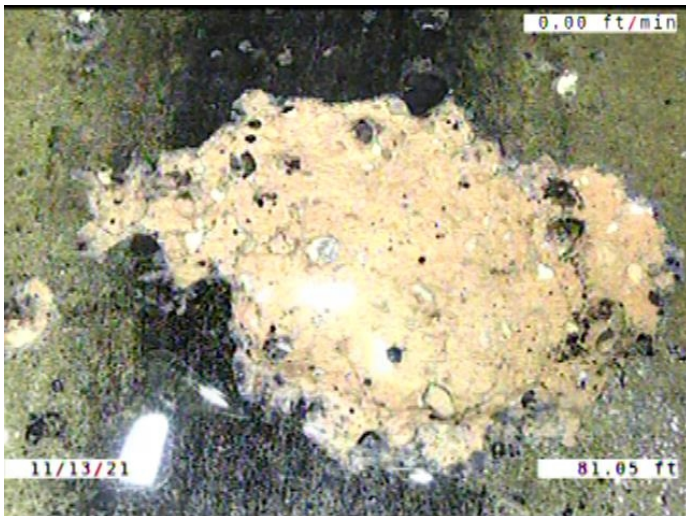


Code: **SSS**
 Description: **Surface Damage Surface Spalling**


Distance (ft): **81.0**
 Structural Grade: **2**
 O&M Grade: **0**
 Clock Start/From: **5**
 Clock To: **7**
 1st Value:
 2nd Value:
 Value Percent:
 Continuous Index:
 Within 8" of Joint: **YES**
 Remarks:

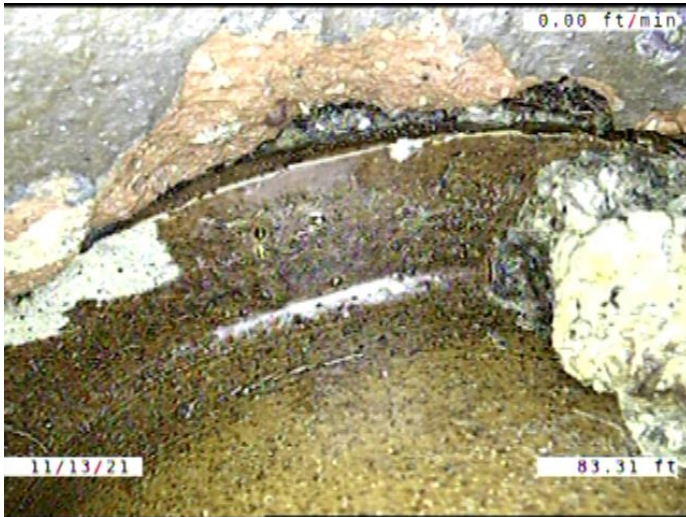

Code:	SSS
Description:	Surface Damage Surface Spalling
Distance (ft):	83.3
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	8
Clock To:	12
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

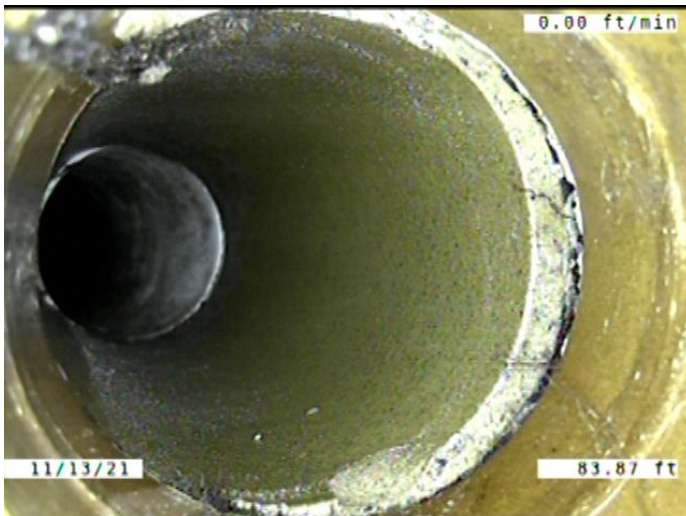

Code:	TBI
Description:	Tap Break-in Intruding
Distance (ft):	83.9
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	10
Clock To:	
1st Value:	6.000
2nd Value:	3.000
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

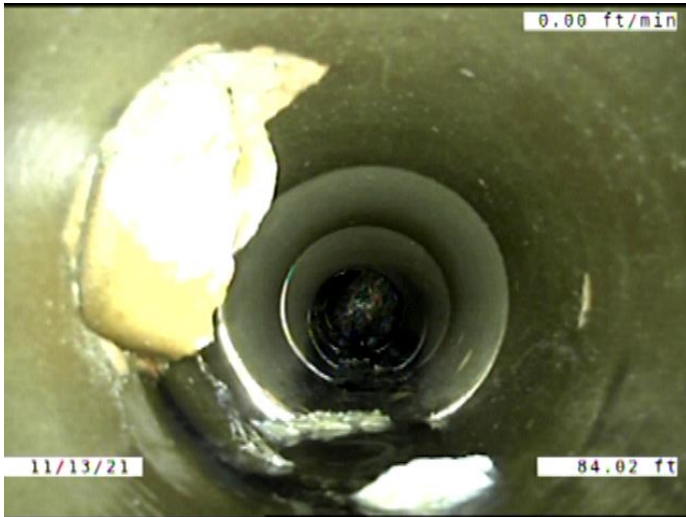

Code:	MSA
Description:	Miscellaneous Survey Abandoned
Distance (ft):	84.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	CAMERA CANT MAKE IT PAST PROTRUDING TAP.