## **Profile/Photo Observation Report**

2.89

Overall Quick:

Overall Index:




353.00

Overall Rating:

Prome/Pn	oto Observatioi	1 Keport			ROBOTICS
Date:	11/18/2021	Weather:		Coding:	PACP 7.0
Pipe Length (ft	): <b>231.4</b>	Owner:	City of Hobart	Pre Clean:	<b>Heavy Cleaning</b>
P.O.#:	YES502259	Surveyor:	S. Bucklin	PSR:	P-605-036-010
Customer:	City of Hobart	Clean Date:	11/17/2021	Shape:	С
Street:	South Pennsylvania Street		Flow Control:	Not Controll	ed
City:	Hobart, IN		Year Renewed:		
Location:	Local rural streets	with light traffic,	t Tape/Media #:		
Purpose:	Routine Assessme	ent	Dia/Height:	12"	
Use:	Sanitary Sewage F	Pipe	Material:	VCP	
Drain Area:			Lining:	None	
Category:	NA				
Comment:					
Location Detail	ls:		Direction of Surv	ey: <b>Downstrean</b>	n
US MH:	M-605-010	DS MH:	M-605-036	Total Length Surveyed	(ft): <b>231.4</b>
O&M Index:	2.17	O&M Quick:	413	O&M Rating:	117.00
Structural Index:	3.47	Structural Qui	ick: 4128	Structural Ratir	ng: <b>236.00</b>

	Position	Code	Observation	Video (sec)	Grade
60	5-010				
	.0	АМН	Manhole	57	NA
Camera Direction	.0	MWL	Miscellaneous Water Level	75	NA
	.9	DR(S06)	Deformed Rigid	98	S 4
	.9	FM(S01)	Fracture Multiple	108	S 4
	.9	RTB	Roots Tap Barrel	129	M 3
	1.2	TFD	Tap Factory Defective	146	M 3
	3.3	RML	Roots Medium Lateral	172	M 3
	3.9	TFD	Tap Factory Defective	192	M 3
	8.6	MWLS(S02)	Miscellaneous Water Level Sag	231	S 2
	13.2	DAE(S03)	Deposits Attached Encrustation	304	M 2
	18.5	DR(F06)	Deformed Rigid	354	S 4
	22.4	MWLS(F02)	Miscellaneous Water Level Sag	377	S 2
	34.0	SSS	Surface Damage Surface Spalling	441	S 2
	44.6	SSS	Surface Damage Surface Spalling	506	S 2
	50.5	TFD	Tap Factory Defective	569	M 3
	50.8	SSS	Surface Damage Surface Spalling	590	S 2
	52.7	TF	Tap Factory	610	NA
	57.6	RBJ	Roots Ball Joint	698	M 4
	58.8	TBI	Tap Break-in Intruding	758	M 2
	61.8	RFB	Roots Fine Barrel	842	M 2
	70.7	В	Broken	895	S 4
	80.1	OBZ	Obstruction Other	968	M 2
	97.4	TFD	Tap Factory Defective	1057	M 3
	99.5	TFD	Tap Factory Defective	1090	M 3
	122.5	OBZ	Obstruction Other	1224	M 2
	132.0	TF	Tap Factory	1295	NA
	150.5	SSS(S07)	Surface Damage Surface Spalling	1405	S 2
	154.5	SSS(F07)	Surface Damage Surface Spalling	1427	S 2
	164.1	MWLS(S04)	Miscellaneous Water Level Sag	1502	S 2
	206.4	MWLS(F04)	Miscellaneous Water Level Sag	1763	S 2
	/214.7	MWLS(S05)	Miscellaneous Water Level Sag	1825	S 2
	//219.1	SSS	Surface Damage Surface Spalling	1859	S 2
	///223.9	DAE(F03)	Deposits Attached Encrustation	1890	M 2
		MWLS(F05)	Miscellaneous Water Level Sag	1898	S 2
	225.1	FM(F01)	Fracture Multiple	1920	S 4
	231.4	AMH	Manhole	2048	NA

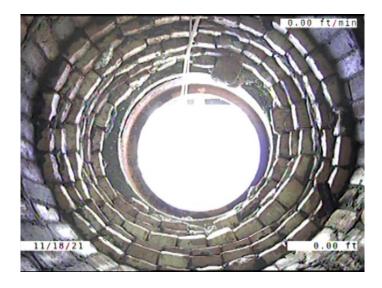

Code: AMH
Description: Manhole

Distance (ft): .0
Structural Grade: 0
O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks: M-605-010



Code: MWL

Description: Miscellaneous Water Level

Distance (ft): .0
Structural Grade: 0
O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value:

Value Percent: 5.000

Continuous Index:

Within 8" of Joint: NO

Remarks:



Code: DR Description: **Deformed Rigid** 

Distance (ft): .9 Structural Grade: 0 O&M Grade:

Clock Start/From:

Clock To: 1st Value: 2nd Value:

5.000 Value Percent: Continuous Index: **S06** Within 8" of Joint: NO

Remarks:



Code: FM

Description: **Fracture Multiple** 

Distance (ft): .9 Structural Grade: 4 O&M Grade: 0 Clock Start/From: 12 Clock To: 12 1st Value:

2nd Value: Value Percent:

Continuous Index: **S01** Within 8" of Joint: YES

Remarks:



Code: RTB

Description: Roots Tap Barrel

Distance (ft): .9
Structural Grade: 0
O&M Grade: 3
Clock Start/From: 10
Clock To: 11

1st Value:


2nd Value:

Value Percent: 5.000

Continuous Index:

Within 8" of Joint: NO

Remarks: GROWING INTO THE SERVICE

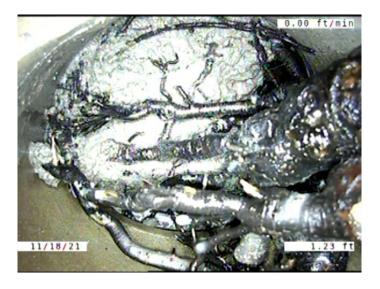

Code: **TFD** 

Description: Tap Factory Defective

Distance (ft): 1.2
Structural Grade: 0
O&M Grade: 3
Clock Start/From: 11

Clock To:

1st Value: **4.000** 

2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: YES

Remarks: BROKEN. 95% PLUGGED WITH

ROOTS.



Code: RML

Description: Roots Medium Lateral

Distance (ft): 3.3
Structural Grade: 0
O&M Grade: 3
Clock Start/From: 2
Clock To: 5

1st Value: 2nd Value:


Value Percent: 5.000

Continuous Index:

Within 8" of Joint:

Remarks:

NO

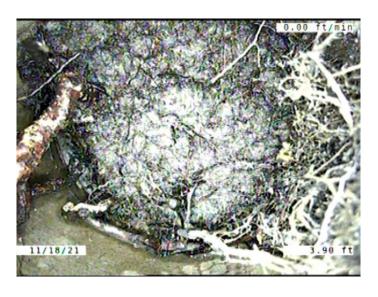

Code: **TFD** 

Description: Tap Factory Defective

Distance (ft): 3.9
Structural Grade: 0
O&M Grade: 3
Clock Start/From: 2

Clock To:

2nd Value:

1st Value: **4.000** 

Value Percent: Continuous Index:

Within 8" of Joint: YES

Remarks: BROKEN. LOOKS TO BE 100% PLUGGED WITH ROOTS.



Code: MWLS

Description: Miscellaneous Water Level Sag

Distance (ft): 8.6
Structural Grade: 2
O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value:

Value Percent: 15.000
Continuous Index: S02
Within 8" of Joint: NO

Remarks:



Code: DAE

Description: Deposits Attached Encrustation

Distance (ft): 13.2
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 9
Clock To: 3
1st Value:
2nd Value:

Value Percent: 5.000
Continuous Index: S03
Within 8" of Joint: YES

Remarks:



Code: DR

Description: **Deformed Rigid** 

Distance (ft): 18.5 Structural Grade: 0 O&M Grade:

Clock Start/From:

Clock To: 1st Value: 2nd Value:

5.000 Value Percent: Continuous Index: F06 Within 8" of Joint: NO

Remarks:



Code: **MWLS** 

Description: **Miscellaneous Water Level Sag** 

Distance (ft): 22.4 Structural Grade: 2 O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value:

Value Percent: 15.000 Continuous Index: F02 Within 8" of Joint: NO

Remarks:



Code: SSS

Description: Surface Damage Surface Spalling

Distance (ft): 34.0
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 1

Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint:

Remarks:

NO



Code: SSS


Description: Surface Damage Surface Spalling

Distance (ft): 44.6
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 10
Clock To: 12
1st Value:
2nd Value:

Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks:

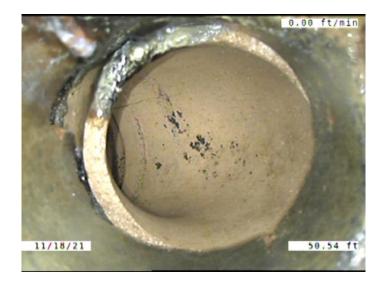

Code: **TFD** 

Description: **Tap Factory Defective** 

Distance (ft): 50.5 Structural Grade: 0 3 O&M Grade: Clock Start/From: 11

Clock To:

1st Value: 4.000

2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: YES

Remarks: **BROKEN. CONSTANTLY RUNNING** 

WATER. LOOKS LIKE WATER IS COMI



SSS Code:

Description: **Surface Damage Surface Spalling** 

Distance (ft): 50.8 Structural Grade: 2 O&M Grade: 0 Clock Start/From: 12 Clock To: 1 1st Value: 2nd Value:

Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks:



Code: **TF** 

Description: Tap Factory

Distance (ft): 52.7
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 1

Clock To:

1st Value: **4.000** 

2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: YES

Remarks: ROOTS GROWING OUT OF THE

JOINT.



Code: RBJ

Description: Roots Ball Joint

Distance (ft): 57.6
Structural Grade: 0

O&M Grade: 4

Clock Start/From: 2

Clock To: 4

1st Value:

2nd Value:


Value Percent: **65.000** 

Continuous Index:

Within 8" of Joint: YES

Remarks:

18 OLJOHIL:

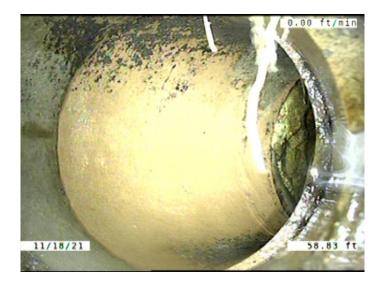

Code: **TBI** 

Description: Tap Break-in Intruding

Distance (ft): 58.8
Structural Grade: 0

O&M Grade: 2

Clock Start/From: 1

Clock To:

 1st Value:
 4.000

 2nd Value:
 1.000


Value Percent:

Continuous Index:

Within 8" of Joint:

Remarks:

YES

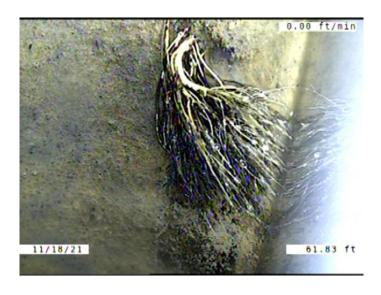

Code: RFB

Description: Roots Fine Barrel

Distance (ft): 61.8
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 3
Clock To:

1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO


Remarks:



Code: B
Description: Broken

Distance (ft): 70.7 Structural Grade: 4 O&M Grade: 0 Clock Start/From: 4 Clock To: 5 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: YES



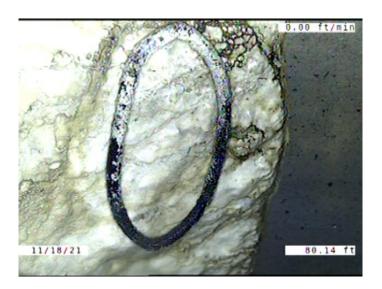

Code: OBZ

Description: Obstruction Other


Distance (ft): 80.1
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 9
Clock To:

1st Value: 2nd Value:

Value Percent: 5.000

Continuous Index:

Within 8" of Joint: YES
Remarks: ORING

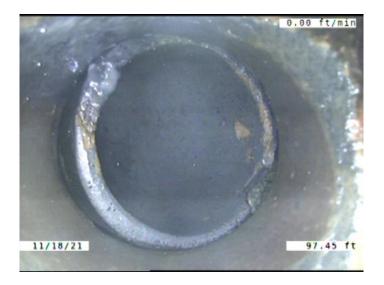

Code: **TFD** 

Description: Tap Factory Defective

Distance (ft): 97.4
Structural Grade: 0
O&M Grade: 3
Clock Start/From: 11

Clock To:


1st Value: **4.000** 

2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: YES

Remarks: BROKEN., CONSTANTLY DRIPPING

WATER. ANGLED JOINT

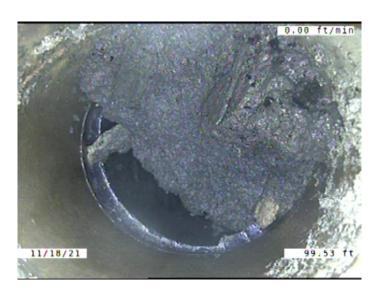

Code: **TFD** 

Description: Tap Factory Defective

Distance (ft): 99.5
Structural Grade: 0

O&M Grade: 3

Clock Start/From: 1

Clock To:


1st Value: **4.000** 

2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: YES

Remarks: BROKEN., CONSTANTLY DRIPPING

WATER. 95% PLUGGED.

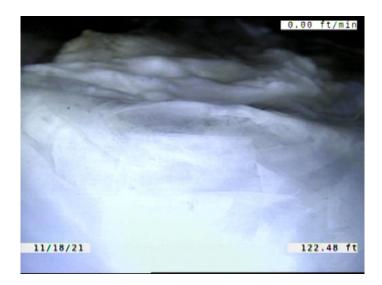

Code: OBZ

Description: Obstruction Other

Distance (ft): 122.5
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 6

Clock To: 1st Value: 2nd Value:


Value Percent: 5.000

Continuous Index:

Within 8" of Joint: YES

Remarks: ENCRUSTATION THAT HAS BEEN

**KNOCKED OFF** 

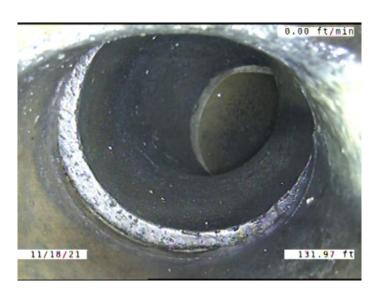

Code: TF

Description: Tap Factory

Distance (ft): 132.0
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 1

Clock To:

1st Value: **4.000** 

2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: YES
Remarks: OFFSET.



Code: SSS

Description: Surface Damage Surface Spalling

Distance (ft): 150.5
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 9
Clock To: 4

Clock To: 1st Value: 2nd Value:

Continuous Index: **S07**Within 8" of Joint: **YES** 

Remarks:

Value Percent:



Code: SSS

Description: Surface Damage Surface Spalling


Distance (ft): 154.5
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 9
Clock To: 4
1st Value:

2nd Value: Value Percent: Continuous Index:

Continuous Index: F07
Within 8" of Joint: YES

Remarks:

iii 8 Oi Joint:

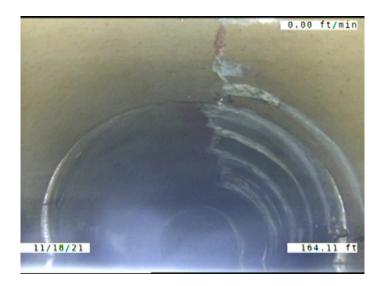

Code: **MWLS** 

Description: **Miscellaneous Water Level Sag** 


Distance (ft): 164.1 Structural Grade: 2 0 O&M Grade:

Clock Start/From:

Clock To: 1st Value: 2nd Value:

Value Percent: 15.000 **S04** Continuous Index: Within 8" of Joint: NO

Remarks:

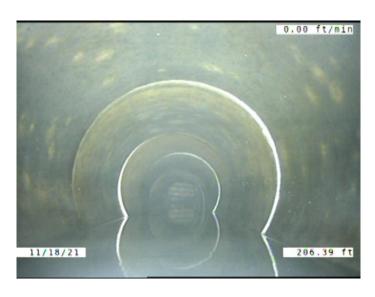

Code: **MWLS** 

Description: **Miscellaneous Water Level Sag** 

Distance (ft): 206.4 Structural Grade: 2 O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value:

Value Percent: 15.000 Continuous Index: F04 Within 8" of Joint: NO

Remarks:



Code: MWLS

Description: Miscellaneous Water Level Sag

Distance (ft): 214.7
Structural Grade: 2
O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value:

Value Percent: 15.000
Continuous Index: S05
Within 8" of Joint: NO

Remarks:



Code: SSS

Description: Surface Damage Surface Spalling

Distance (ft): 219.1
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 9

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks:



Code: DAE


Description: **Deposits Attached Encrustation** 

Distance (ft): 223.9 Structural Grade: 0 2 O&M Grade: Clock Start/From: 9 Clock To: 3

1st Value: 2nd Value:

5.000 Value Percent: Continuous Index: F03 Within 8" of Joint: YES

Remarks:

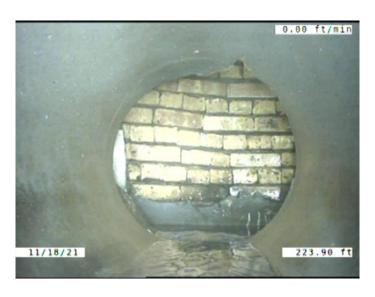

Code: **MWLS** 

Description: **Miscellaneous Water Level Sag** 

Distance (ft): 223.9 Structural Grade: 2 O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value:

Value Percent: 15.000 Continuous Index: F05 Within 8" of Joint: NO

Remarks:



Code: **FM** 

Description: Fracture Multiple

Distance (ft): 225.1
Structural Grade: 4

O&M Grade: 0

Clock Start/From: 12

Clock To: 12

1st Value: 2nd Value: Value Percent:

Continuous Index: F01
Within 8" of Joint: YES

Remarks:



Code: AMH
Description: Manhole

Distance (ft): 231.4
Structural Grade: 0

O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks: M-605-036