
Date:	11/18/2021	Weather:		Coding:	PACP 7.0
Pipe Length (ft)	: 160.4	Owner:	City of Hobart	Pre Clean:	Heavy Cleaning
P.O.#:	YES502259	Surveyor:	S. Bucklin	PSR:	P-605-074-075
Customer:	City of Hobart	Clean Date:	11/18/2021	Shape:	С
Street:	South Ash Street		Flow Control:	Not Controlled	I
City:	Hobart, IN		Year Renewed:		
Location:	Local rural streets	with light traffic,	, t Tape/Media #:		
Purpose:	Routine Assessme	ent	Dia/Height:	10"	
Use:	Sanitary Sewage F	Pipe	Material:	VCP	
Drain Area:			Lining:	None	
Category:	NA				
Comment:					
Location Details	5:		Direction of Surv	ey: Downstream	
US MH:	M-605-075	DS MH:	M-605-074	Total Length Surveyed (ft): 160.4
0&M Index:	1.65	O&M Quick:	312/	O&M Rating:	33.00
tructural Index:	2.83	Structural Qu	uick: 423		34.00
Overall Index:	2.09	Overall Quick	400		67.00


	5 .0				
F					
		AMH	Manhole	1	NA
	.0	MWL	Miscellaneous Water Level	67	NA
	.5	СМ	Crack Multiple	111	S 3
	3.9	ISGT(S01)	Intruding Sealing Material Grout	179	M 2
	6.1	SSS	Surface Damage Surface Spalling	217	S 2
/// <u>`</u>	6.1	СМ	Crack Multiple	228	S 3
	6.3	TBI	Tap Break-in Intruding	251	M 2
	19.6	ISGT(F01)	Intruding Sealing Material Grout	315	M 2
	27.9	СМ	Crack Multiple	372	S 3
╡	29.8	СМ	Crack Multiple	415	S 3
	32.0	ISGT	Intruding Sealing Material Grout	460	M 2
	46.2	ISGT	Intruding Sealing Material Grout	569	M 2
	57.1	SSS	Surface Damage Surface Spalling	671	S 2
	57.8	TBI	Tap Break-in Intruding	691	M 2
	60.4	СМ	Crack Multiple	771	S 3
\'	64.4	DSF	Deposits Settled Fine	803	M 2
┝┝╾╾╲╲╵	78.4	ISGT	Intruding Sealing Material Grout	882	M 2
	82.6	ISGT	Intruding Sealing Material Grout	926	M 2
· · ·	107.1	FM	Fracture Multiple	1075	S 4
/	112.9	RFJ	Roots Fine Joint	1111	M 1
	119.1	RFJ	Roots Fine Joint	1180	M 1
//	121.0	RFJ	Roots Fine Joint	1210	M 1
	121.0	CL	Crack Longitudinal	1227	S 2
	133.3	RFJ(SO2)	Roots Fine Joint	1329	M 1
	141.3	RTJ	Roots Tap Joint	1383	M 2
//	147.3	RMJ	Roots Medium Joint	1436	M 3
	151.8	FM	Fracture Multiple	1538	S 4
///	153.8	CS	Crack Spiral	1584	S 2
	157.8	FS	Fracture Spiral	1632	S 3
	158.2	RFJ(F02)	Roots Fine Joint	1655	M 1
	160.4	AMH	Manhole	1749	NA




Code:	AMH
Description:	Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-605-075

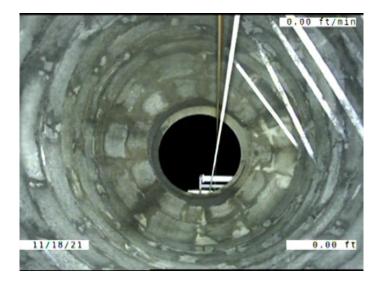


Code: Description:	MWL Miscellaneous Water Level
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

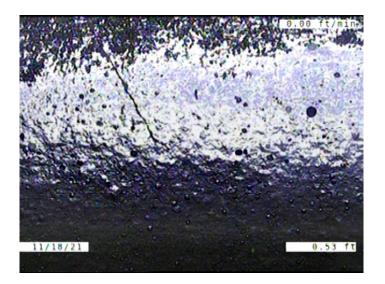

Code:	СМ
Description:	Crack Multiple
	-
Distance (ft):	.5
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	12
Clock To:	1
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

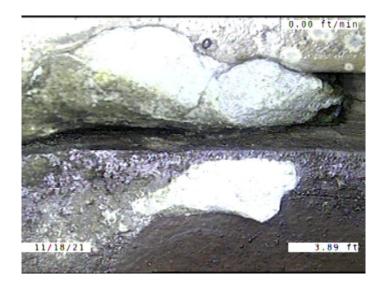


Code: Description:	ISGT Intruding Sealing Material Grout
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	3.9 0 2 12 12 5.000 S01
Within 8" of Joint: Remarks:	NO

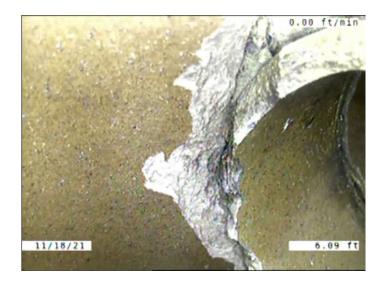


Code: Description:	SSS Surface Damage Surface Spalling
Distance (ft):	6.1
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	11
Clock To:	2
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO

Remarks:

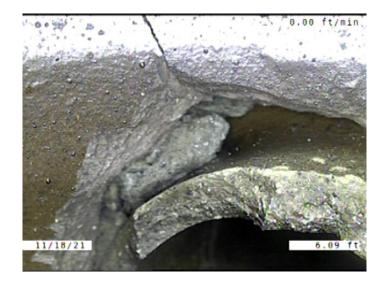


Code: Description:	CM Crack Multiple
Distance (ft):	6.1
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	11
Clock To:	2
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

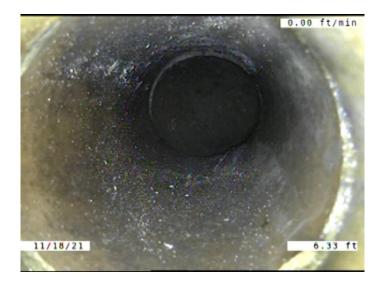


Code: Description:	TBI Tap Break-in Intruding
Distance (ft):	6.3
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	12
Clock To:	
1st Value:	6.000
2nd Value:	1.000
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	ISGT Intruding Sealing Material Grout
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value:	19.6 0 2 12 12
Value Percent: Continuous Index: Within 8" of Joint: Remarks:	5.000 F01 NO

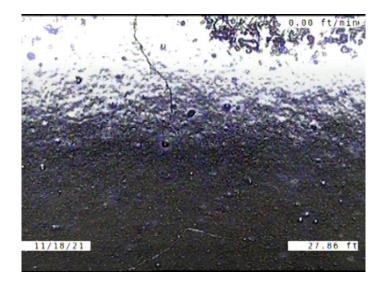

СМ
Crack Multiple
27.0
27.9
3
0
11
2
YES

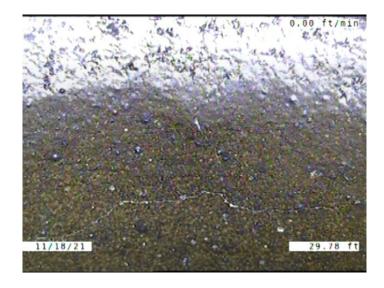

Code: Description:	CM Crack Multiple
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value:	29.8 3 0 12 3
2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	YES

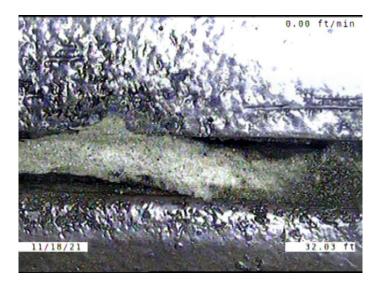

 Code:
 ISGT


 Description:
 Intruding Sealing Material Grout

 Distance (ft):
 32.0


 Structural Grade:
 0

 O&M Grade:
 2


Clock Start/From: 3 Clock To: 9 1st Value: 2nd Value: Value Percent: 5.000 Continuous Index: Within 8" of Joint: NO Remarks:

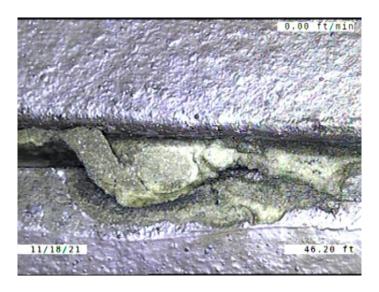


Code: Description:	ISGT Intruding Sealing Material Grout
Distance (ft):	46.2
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	12
Clock To:	12
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

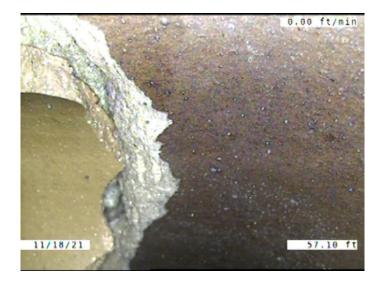


Code: Description:	SSS Surface Damage Surface Spalling
Description.	Surface Damage Surface Spanning
Distance (ft):	57.1
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	9
Clock To:	1
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

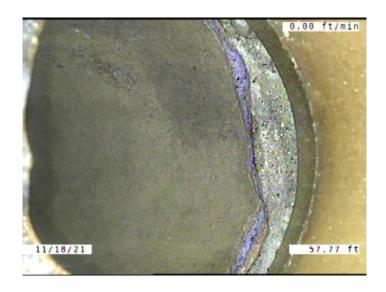

Code: Description:	TBI Tap Break-in Intruding
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	57.8 0 2 11 6.000 3.000

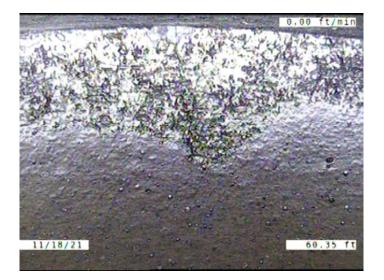

Code:	СМ
Description:	Crack Multiple
Distance (ft):	CO A
Distance (ft):	60.4
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	10
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

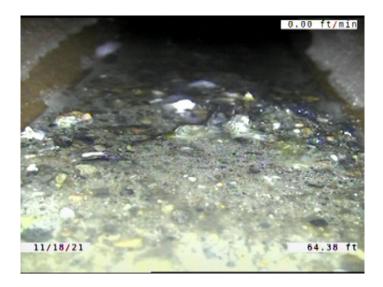


Code: Description:	DSF Deposits Settled Fine
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	64.4 0 2 5 7 5.000
Within 8" of Joint: Remarks:	YES



Code: Description:	ISGT Intruding Sealing Material Grout
Distance (ft):	78.4
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	3
Clock To:	10
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	ISGT Intruding Sealing Material Grout
Distance (ft):	82.6
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	2
Clock To:	10
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

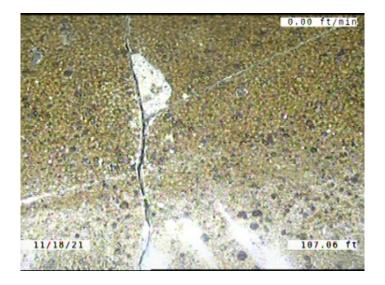

Code:	FM
Description:	Fracture Multiple
Distance (ft):	107.1
Distance (ft):	107.1
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	1
Clock To:	9
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	RFJ Roots Fine Joint
Distance (ft):	112.9
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	3
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code:	RFJ
Description:	Roots Fine Joint
Distance (ft):	119.1
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	10
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	RFJ Roots Fine Joint
Distance (ft): Structural Grade: Q&M Grade:	121.0 0 1
Clock Start/From: Clock To:	2 3
1st Value: 2nd Value: Value Percent:	
Continuous Index: Within 8" of Joint:	YES
Remarks:	

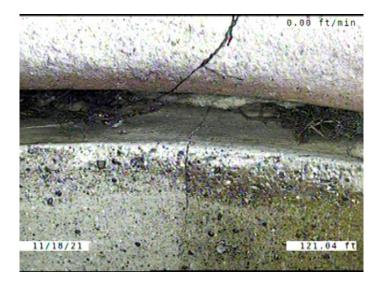

Code: Description:	CL Crack Longitudinal
Distance (ft):	121.0
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	2
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

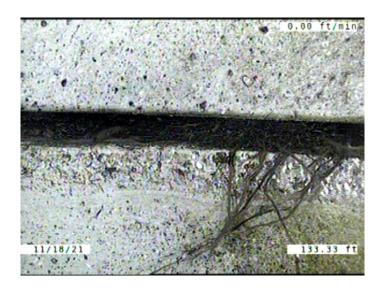


Code: Description:	RFJ Roots Fine Joint
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent:	133.3 0 1 9 4
Continuous Index: Within 8" of Joint: Remarks:	SO2 YES

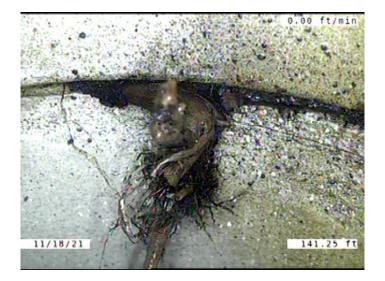

Code:	RTJ
Description:	Roots Tap Joint
Distance (ft):	141.3
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	1
Clock To:	2
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	RMJ Roots Medium Joint
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	147.3 0 3 2 6 20.000 YES
Remarks:	

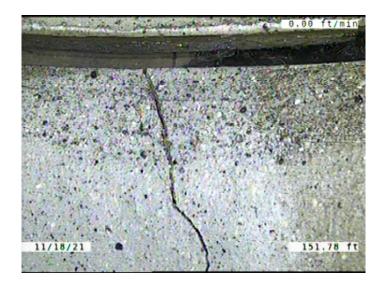

Code: Description:	FM Fracture Multiple
Distance (ft):	151.8
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	8
Clock To:	3
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code:	CS
Description:	Crack Spiral
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	153.8 2 0 8 12 YES

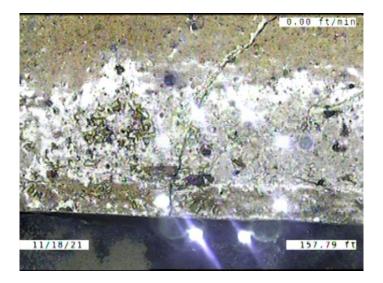

FS
Fracture Spiral
157.8
3
0
3
6
YES



Code: Description:	RFJ Roots Fine Joint
Distance (ft):	158.2
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	9
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	F02
Within 8" of Joint:	YES
Remarks:	

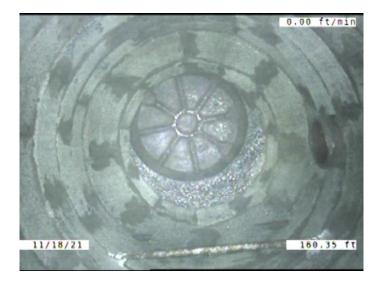

Code: Description:	AMH Manhole
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	160.4 0 0 NO M-605-074