Profile/Pho	oto Observation F	Report				RedZone R 0 B 0 T I C S
Date: Pipe Length (ft) P.O.#: Customer:	04/09/2018 : 205.1	Weather: Owner: Surveyor: Clean Date:	NA Byrd Fitzg 01/01/190			PACP 6.0 No Pre-Cleaning P-606-088-087 C
Street:	N LAKE SHORE DR		Flow Contro	ol:	Not Controlled	
City:	Hobart, IN		Year Renew	ed:		
Location:	Yard		Tape/Media	a #:		
Purpose:	Routine Assessment		Dia/Height:		12"	
Use:	Sanitary		Material:		VCP	
Drain Area:	NA		Lining:			
Category:	NA					
Comment:						
Location Details	5:		Direction of	Survey:	Upstream	
US MH:	M-606-087	DS MH:	M-606-088		Total Length Surveyed (ft):	30.0
D&M Index:	2.00	O&M Quick:		2400	O&M Rating:	8.00
Structural Index:	0.00		lick:	0000	Structural Rating:	0.00
Overall Index:	2.00	Overall Quick		2400	Overall Rating:	8.00

10	sition Co	ode	Observation	Video (sec)	Grade
606-088					
0.	AM	4H I	Manhole	10	NA
0.	M٧	NL Y	Nater Level	21	NA
2.5	DA	ZI	Deposits Attached Other	38	M 2
11.	5 TF		Fap Factory	68	NA
12.	8 DA	E(S01) I	Deposits Attached Encrustation	84	M 2
30.	0 MS	SA /	Abandoned Survey	131	NA
30.	0 DA	\E(F01) I	Deposits Attached Encrustation	142	M 2



Code: Description:	AMH Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-606-088



Code: MWL Description: Water Level

Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code:	DAZ
Description:	Deposits Attached Other


Distance (ft):	2.5
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	7
Clock To:	10
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code:	TF
Description:	Tap Factory
Distance (ft):	11.5
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	11
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

Code:

Description:

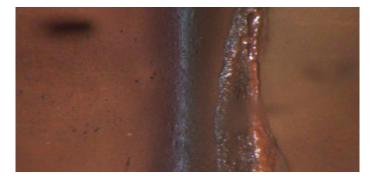

.2.8
)
2
L
;
5.000
601
'ES
vandering

DAE

Deposits Attached Encrustation



Code: MSA Description: Abandoned Survey

Distance (ft): 30.0 Structural Grade: 0 O&M Grade: 0 Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: NO Remarks: camera flipped

Code: Description: DAE Deposits Attached Encrustation



Distance (ft):	30.0
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	1
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	F01
Within 8" of Joint:	YES
Remarks:	wandering