Date:	04/21/2018	Weather:			Coding:	PACP 6.0
Pipe Length (ft)	: 395.3	Owner:	NA		Pre Clean:	Not Known
P.O.#:		Surveyor:	Mark Ruby		PSR:	P-704-015-014
Customer:		Clean Date:	01/01/1900		Shape:	С
Street:	E Home Ave		Flow Control:		Not Controlled	
City:	Hobart, IN		Year Renewed	l:		
Location:	Other		Tape/Media #	:		
Purpose:	Not Known		Dia/Height:		12"	
Use:	Sanitary		Material:		VCP	
Drain Area:	NA		Lining:			
Category:	NA					
Comment:						
Location Details	5:		Direction of S	urvey:	Upstream	
US MH:	M-704-014	DS MH:	M-704-015	Tota	l Length Surveyed (ft)	: 190.8
D&M Index:	2.00	O&M Quick:	4	126	O&M Rating:	18.00
Structural Index:	0.00	Structural Qu	uick: 0	000	Structural Rating:	0.00
Overall Index:	2.00	Overall Quick		126	Overall Rating:	18.00

	Position	Code	Observation	Video (sec)	Grade
A (70)	4-015				
	.0	AMH	Manhole	10	NA
-11	.0	MWL	Water Level	21	NA
-11	1.7	TBI	Tap Break-in Intruding	36	M 2
	21.2	TFC	Tap Factory Capped	89	NA
-11	24.4	TFC	Tap Factory Capped	107	NA
-11	49.0	TFC	Tap Factory Capped	169	NA
	52.0	TFC	Tap Factory Capped	187	NA
tt.	73.7	TFC	Tap Factory Capped	242	NA
-11	/73.7	RFJ	Roots Fine Joint	255	M 1
	75.5	TFC	Tap Factory Capped	273	NA
	75.9	RFJ	Roots Fine Joint	288	M 1
	90.4	TBI	Tap Break-in Intruding	333	M 2
	96.1	TF	Tap Factory	359	NA
5 🖿	98.7	TF	Tap Factory	376	NA
	117.0	ТВ	Tap Break-in	425	NA
	123.2	TFC	Tap Factory Capped	449	NA
	126.2	TFC	Tap Factory Capped	467	NA
	142.9	DAZ	Deposits Attached Other	515	M 2
	/ 145.0	TFD	Tap Factory Defective	533	M 2
	145.0	TBI	Tap Break-in Intruding	546	M 2
	147.7	TFC	Tap Factory Capped	566	NA
	155.0	DAZ	Deposits Attached Other	594	M 2
	172.6	TF	Tap Factory	643	NA
н.	174.5	TFC	Tap Factory Capped	659	NA
	189.5	RMB	Roots Medium Barrel	703	M 4
	190.8	MSA	Abandoned Survey	722	NA



Code: AMH Description: Manhole Distance (ft): .0 Structural Grade: 0 O&M Grade: 0 Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

6

Code: Description:	MWL Water Level
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	10.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

NO

M-704-015



Code:TBIDescription:Tap Break-in Intruding

Distance (ft):	1.7
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	10
Clock To:	
1st Value:	4.000
2nd Value:	3.000
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	



Code: Description:	TFC Tap Factory Capped
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	21.2 0 0 10 4.000
Netharks.	



Code:TFCDescription:Tap Factory Capped

Distance (ft):	24.4
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	2
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	



Code: Description:	TFC Tap Factory Capped
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:	49.0 0 0 10 4.000
Within 8" of Joint: Remarks:	



Code:TFCDescription:Tap Factory Capped

52.0 Distance (ft): Structural Grade: 0 O&M Grade: 0 Clock Start/From: 3 Clock To: 1st Value: 4.000 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:



Code: Description:	TFC Tap Factory Capped
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	73.7 0 0 10 4.000
Remarks:	



Code: RFJ Description: Roots Fine Joint

Distance (ft):	73.7
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	7
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Description: Tap F	actory Capped
Distance (ft):75.5Structural Grade:0O&M Grade:0Clock Start/From:2Clock To:11st Value:4.0002nd Value:4.000Value Percent:Continuous Index:Within 8" of Joint:Remarks:	



Code:	RFJ
Description:	Roots Fine Joint
Distance (ft):	75.9
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	2

clock start frionn	-
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	TBI Tap Break-in Intruding
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	90.4 0 2 2 4.000 3.000




Code:	TF
Description:	Tap Factory

Distance (ft):	96.1
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	10
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	



Code: Description:	TF Tap Factory
Distance (ft):	98.7
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	2
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	

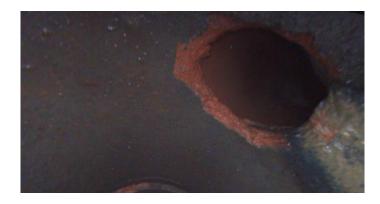

Code:	тв
Description:	Tap Break-in

Distance (ft):	117.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	10
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	



Code:	TFC
Description:	Tap Factory Capped
Distance (ft):	123.2
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	2
Clock To: 1st Value: 2nd Value: Value Percent:	4.000
Continuous Index: Within 8" of Joint: Remarks:	



Code: Description: TFC Tap Factory Capped

Distance (ft): 126.2 Structural Grade: 0 O&M Grade: 0 Clock Start/From: 10 Clock To: 1st Value: 4.000 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:



Code: Description:	DAZ Deposits Attached Other
Distance (ft):	142.9
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	7
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code:TFDDescription:Tap Factory Defective

Distance (ft):	145.0
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	10
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	ROOTS



Code: Description:	TBI Tap Break-in Intruding
Distance (ft):	145.0
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	2
Clock To:	
1st Value:	4.000
2nd Value:	3.000
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	



Code: TFC Description: **Tap Factory Capped**

Distance (ft): Structural Grade: 0 O&M Grade: 0 Clock Start/From: 2 Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:

147.7 4.000



Code: Description:	DAZ Deposits Attached Other
Distance (ft):	155.0
Structural Grade: O&M Grade:	0 2
Clock Start/From:	5
Clock To: 1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint: Remarks:	YES
Nethalks.	



Code:	TF
Description:	Tap Factory

Distance (ft):	172.6
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	10
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	



Code: Description:	TFC Tap Factory Capped
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent:	174.5 0 0 2 4.000
Continuous Index: Within 8" of Joint: Remarks:	



Code: RMB Description: Roots M

Roots Medium Barrel

Distance (ft):	189.5
Structural Grade:	0
O&M Grade:	4
Clock Start/From:	12
Clock To:	12
1st Value:	
2nd Value:	
Value Percent:	40.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code:	
Description:	

MSA Abandoned Survey

Distance (ft):	190.8
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	RMB