Profile/Photo Observation Report



Date: 04/09/2018 Weather: **PACP 6.0** Coding: Pipe Length (ft): 283.5 Owner: NA Pre Clean: **Not Known** P.O.#: Jen Costello PSR: P-707-021-080 Surveyor:

Customer: Clean Date: 01/01/1900 Shape: C

Street: Capitol Flow Control: Not Controlled

City: Hobart, IN Year Renewed:
Location: Light Highway Tape/Media #:

Purpose: Maintenance Related Dia/Height: 8"
Use: Sanitary Material: PVC

Drain Area: NA Lining: Cured in Place

Category: NA
Comment: debris at 274'. flow incorrect.

Location Details: Direction of Survey: **Downstream**

US MH: M-707-080 DS MH: M-707-021 Total Length Surveyed (ft): 275.6

1.91 3324 21.00 O&M Index: O&M Quick: O&M Rating: 2.69 5141 35.00 Structural Quick: Structural Rating: Structural Index: 2.33 56.00 5141 Overall Quick: Overall Rating: Overall Index:

	Position	Code	Observation	Video (sec)	Grade
M(70	7-080				
	0.	AMH	Manhole	10	NA
- 11	0.	MWL	Water Level	21	NA
- 11	5.7	FS	Fracture Spiral	44	S 3
- 11	5.7	IW	Infil Weeper	55	M 2
- 11	24.7	MMC	Material Change	105	NA
- 11	24.9	RFJ	Roots Fine Joint	117	M 1
- 11	27.5	FL	Fracture Longitudinal	134	S 3
- 11	1 1 29.1	RFJ	Roots Fine Joint	150	M 1
-11	40.1	FL	Fracture Longitudinal	183	S 3
ë –	1 \\\56.4	TFA	Tap Factory Active	228	NA
rect	\\56.4	SSS	Surface Spalling	239	S 2
Camera Direction	70.0	SSS	Surface Spalling	278	S 2
ž I	88.1	MGO	General Observation	328	NA
S	111.4	DAZ	Deposits Attached Other	386	M 2
ш	113.4	CL	Crack Longitudinal	402	S 2
	113.4	FL	Fracture Longitudinal	414	S 3
↓ ∐	117.7	FM	Fracture Multiple	433	S 4
	124.7	TFD	Tap Factory Defective	460	M 2
Н	124.7	RML	Roots Medium Lateral	471	M 3
-11	126.9	TF	Tap Factory	489	NA
ш	128.4	В	Broken	505	S 5
-11	134.8	RMJ	Roots Medium Joint	529	M 3
Ш	136.7	RMJ	Roots Medium Joint	543	M 3
- 11	153.1	SSS	Surface Spalling	587	S 2
-11	168.9	TF	Tap Factory	630	NA
	170.4	TFA	Tap Factory Active	646	NA
-11	192.3	CM	Crack Multiple	703	S 3
-11	209.4	TFA	Tap Factory Active	749	NA
	211.6	TFA	Tap Factory Active	767	NA
	233.6	ОВМ	Obstacle Pipe Material	824	M 2
	251.5	TFA	Tap Factory Active	871	NA
	252.9	TFA	Tap Factory Active	887	NA
	256.3	RFJ	Roots Fine Joint	906	M 1
	260.6	SSS	Surface Spalling	926	S 2
	266.7	RFJ	Roots Fine Joint	949	M 1
	271.0	JOM	Joint Offset Medium	968	S 1
	275.6	MSA	Abandoned Survey	990	NA
M 70	7,021				



Code: AMH
Description: Manhole

Distance (ft): .0
Structural Grade: 0
O&M Grade: 0

Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks: M-707-080



Code: MWL

Description: Water Level

Distance (ft): .0
Structural Grade: 0
O&M Grade: 0


Clock Start/From: Clock To:

1st Value: 2nd Value:

Value Percent: 20.000

Continuous Index:

Within 8" of Joint: NO

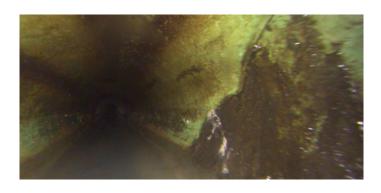

Code: FS

Description: Fracture Spiral


Distance (ft): 5.7
Structural Grade: 3
O&M Grade: 0
Clock Start/From: 2
Clock To: 4

1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks:

Code: IW


Description: Infil Weeper

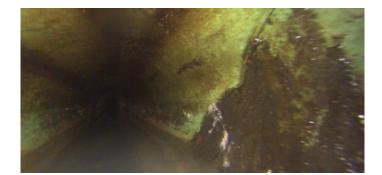

Distance (ft): 5.7
Structural Grade: 0
O&M Grade: 2

Clock Start/From: 1
Clock To: 4
1st Value:

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

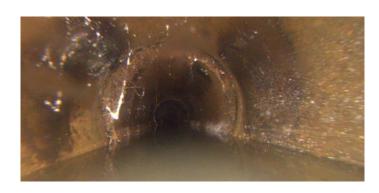

Code: MMC

Description: Material Change

Distance (ft): 24.7
Structural Grade: 0


O&M Grade: 0

Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent:

Continuous Index:

Within 8" of Joint: NO

Remarks: VCP

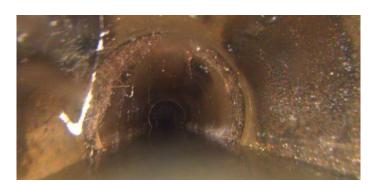

Code: RFJ

Description: Roots Fine Joint

Distance (ft): 24.9
Structural Grade: 0
O&M Grade: 1
Clock Start/From: 8
Clock To: 4
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint: YES



Code: FL

Description: Fracture Longitudinal


Distance (ft): 27.5
Structural Grade: 3
O&M Grade: 0
Clock Start/From: 12

Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint:

Remarks:

YES

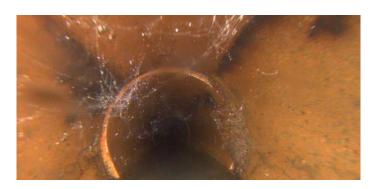


Code: RFJ

Description: Roots Fine Joint

Distance (ft): 29.1
Structural Grade: 0
O&M Grade: 1
Clock Start/From: 8
Clock To: 4
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint: YES

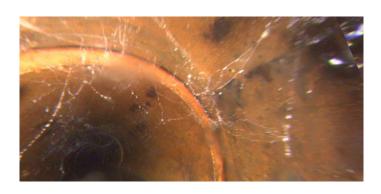

Code: FL

Description: Fracture Longitudinal


Distance (ft): 40.1
Structural Grade: 3
O&M Grade: 0
Clock Start/From: 2

Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint:

Remarks:

YES

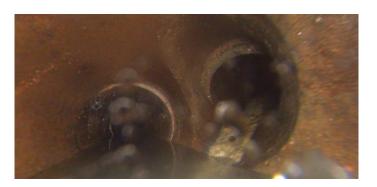

Code: TFA

Description: Tap Factory Active

Distance (ft): 56.4
Structural Grade: 0

O&M Grade: 0

Clock Start/From: 3

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

......



Code: SSS

Description: Surface Spalling

Distance (ft): 56.4
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 9
Clock To: 10

1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks:

Code: SSS

Description: Surface Spalling




Distance (ft): 70.0
Structural Grade: 2

O&M Grade: 0

O&M Grade: 0
Clock Start/From: 12

Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint: YES

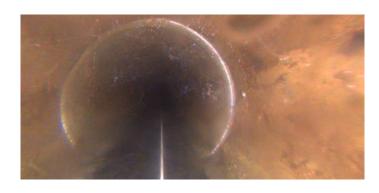

Code: MGO

Description: General Observation

Distance (ft): 88.1
Structural Grade: 0


O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks: REAR CAMERA

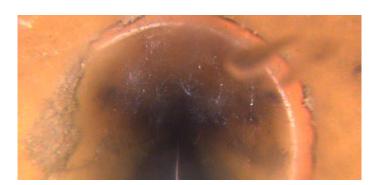

Code: DAZ


Description: Deposits Attached Other

Distance (ft): 111.4
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 2
Clock To: 3
1st Value:
2nd Value:

Value Percent: 5.000

Continuous Index:

Within 8" of Joint: YES

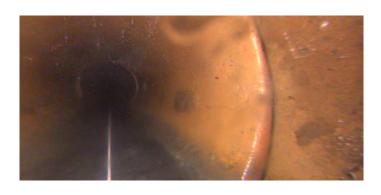

Code: CL

Description: Crack Longitudinal


Distance (ft): 113.4
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 9

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

YES

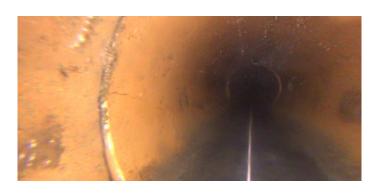


Code: FL

Description: Fracture Longitudinal

Distance (ft): 113.4
Structural Grade: 3
O&M Grade: 0
Clock Start/From: 3
Clock To:
1st Value:

2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: YES

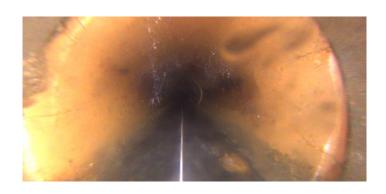

Code: FM

Description: Fracture Multiple

Distance (ft): 117.7
Structural Grade: 4

O&M Grade: 0

Clock Start/From: 8

Clock To: 4

1st Value:

1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

YES



Code: **TFD**

Description: Tap Factory Defective


Distance (ft): 124.7
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 9

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks: ROOTS

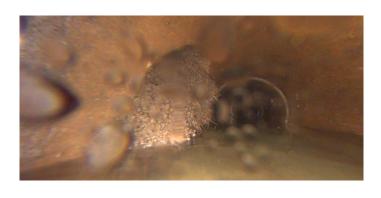

Code: RML

Description: Roots Medium Lateral

Distance (ft): 124.7
Structural Grade: 0
O&M Grade: 3
Clock Start/From: 8
Clock To: 10

1st Value: 2nd Value:


Value Percent: 10.000

Continuous Index:

Within 8" of Joint:

Remarks:

NO

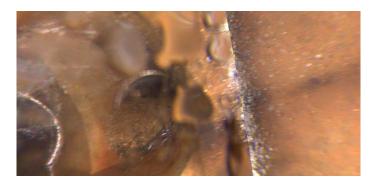

Code: **TF**


Description: **Tap Factory**

Distance (ft): 126.9
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 3

Clock To:

1st Value: **4.000**


2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

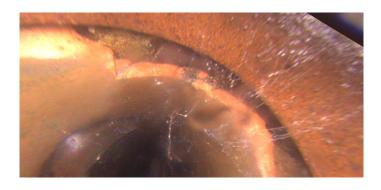

Code: B
Description: Broken

Distance (ft): 128.4 Structural Grade: 5 O&M Grade: 0 Clock Start/From: 9 Clock To: 1 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: YES

Remarks:

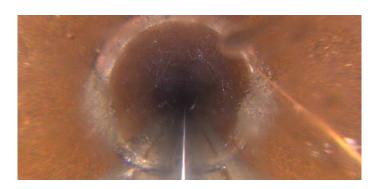

Code: RMJ


Description: Roots Medium Joint

Distance (ft): 134.8
Structural Grade: 0
O&M Grade: 3
Clock Start/From: 8
Clock To: 4
1st Value:
2nd Value:

Value Percent: 5.000

Continuous Index:

Within 8" of Joint: YES

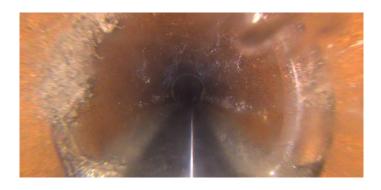

Code: RMJ

Description: Roots Medium Joint

Distance (ft): 136.7
Structural Grade: 0
O&M Grade: 3
Clock Start/From: 8
Clock To: 4

1st Value: 2nd Value:


Value Percent: 5.000

Continuous Index:

Within 8" of Joint:

Remarks:

YES

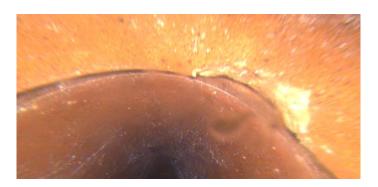


Code: SSS

Description: Surface Spalling

Distance (ft): 153.1
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 11
Clock To: 12
1st Value:
2nd Value:

Value Percent: Continuous Index:

Within 8" of Joint: YES

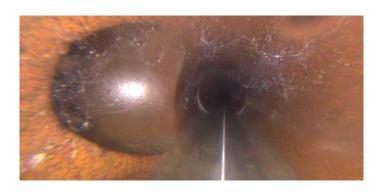

Code: **TF**

Description: Tap Factory

Distance (ft): 168.9
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 3

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks:



Code: TFA

Description: Tap Factory Active

Distance (ft): 170.4
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 9

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:



Code: CM

Description: Crack Multiple


Distance (ft): 192.3
Structural Grade: 3
O&M Grade: 0
Clock Start/From: 8
Clock To: 4

1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

YES

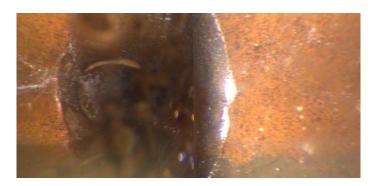

Code: TFA

Description: Tap Factory Active

Distance (ft): 209.4
Structural Grade: 0

O&M Grade: 0

Clock Start/From: 3

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:



Code: TFA

Description: Tap Factory Active


Distance (ft): 211.6
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 9

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks:

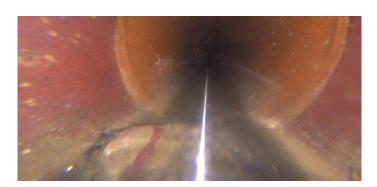

Code: OBM


Description: Obstacle Pipe Material

Distance (ft): 233.6
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 4
Clock To: 5
1st Value:
2nd Value:

Value Percent: 5.000

Continuous Index:

Within 8" of Joint: NO

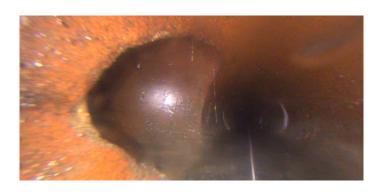

Code: TFA

Description: Tap Factory Active

Distance (ft): 251.5
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 3

Clock To:


1st Value: **4.000**

2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

NO

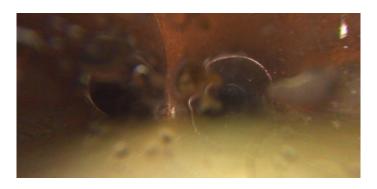

Code: TFA


Description: Tap Factory Active

Distance (ft): 252.9
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 9

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

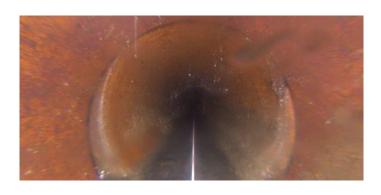

Code: RFJ

Description: Roots Fine Joint


Distance (ft): 256.3
Structural Grade: 0
O&M Grade: 1
Clock Start/From: 10

Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint:

Remarks:

YES

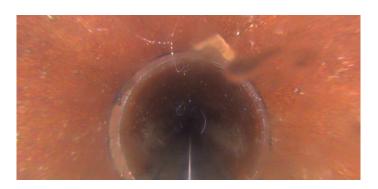


Code: SSS

Description: Surface Spalling

Distance (ft): 260.6
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 12

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: YES

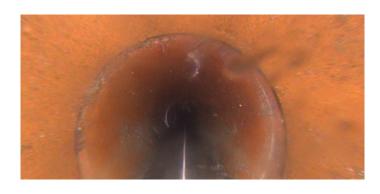

Code: RFJ

Description: Roots Fine Joint

Distance (ft): 266.7
Structural Grade: 0
O&M Grade: 1
Clock Start/From: 8
Clock To: 4

1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

YES



Code: **JOM**


Description: Joint Offset Medium

Distance (ft): 271.0
Structural Grade: 1
O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO

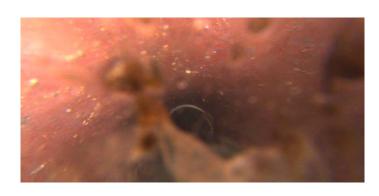

Code: MSA

Description: Abandoned Survey

Distance (ft): 275.6
Structural Grade: 0
O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks: **DEBRIS UNDER WATER**