Date:	03/28/2018	Weather:		Coding:	PACP 6.0
Pipe Length (ft):	163.8	Owner:	NA	Pre Clean:	Not Known
P.O.#:		Surveyor:	Selasie Honu	PSR:	P-803-037-038
Customer:		Clean Date:	01/01/1900	Shape:	С
Street:	E RAND ST		Flow Control:	Not Controlled	1
City:	Hobart, IN		Year Renewed:		
Location:	Other		Tape/Media #:		
Purpose:	Not Known		Dia/Height:	10"	
Use:	Sanitary		Material:	VCP	
Drain Area:	NA		Lining:		
Category:	NA				
Comment:					
Location Details	:		Direction of Surve	ey: Downstream	
US MH:	M-803-037	DS MH:	M-803-038	Total Length Surveyed (ft): 158.7
D&M Index:	1.86	O&M Quick:	2B13	B O&M Rating:	39.00
Structural Index:	2.00	Structural Qu	uick: 2100		2.00
Overall Index:	1.86	Overall Quic			41.00

	Position	Code	Observation	Video (sec)	Grad
303-0)37				
	0.	AMH	Manhole	10	NA
\ \	.0	MWL	Water Level	21	NA
	4.6	RFJ	Roots Fine Joint	42	M 1
	67.4	DAGS(S01)	Deposits Attached Grease	181	M 2
	101.5	TFA	Tap Factory Active	265	NA
	119.4	RFJ	Roots Fine Joint	314	M 1
	122.8	CL	Crack Longitudinal	333	S 2
	137.4	RFJ	Roots Fine Joint	374	M 1
	157.0	DAGS(F01)	Deposits Attached Grease	424	M 2
/	158.7	АМН	Manhole	439	NA
	158.7	AMH	Manhole	439	NA




Code: Description:	AMH Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-803-037




Code: MWL Description: Water Level

Distance (ft): .0 Structural Grade: 0 0 O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: 5.000 Continuous Index: Within 8" of Joint: NO Remarks:

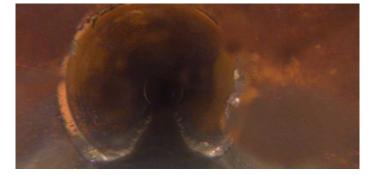


Code: Description:	RFJ Roots Fine Joint
Distance (ft):	4.6
Distance (ft):	4.6
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	3
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

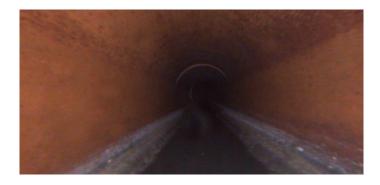


Code:DAGSDescription:Deposits Attached Grease

Distance (ft):	67.4
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	7
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	S01
Within 8" of Joint:	NO
Remarks:	

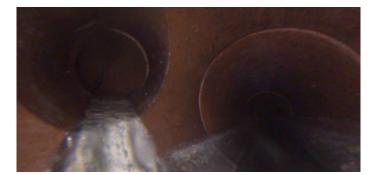

Code:	TFA
Description:	Tap Factory Active

Distance (ft):	101.5
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	3
Clock To:	
1st Value:	4.000
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	
Remarks:	

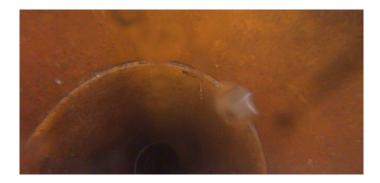


Code:RFJDescription:Roots Fine Joint

Distance (ft):	119.4
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	1
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code:	CL
Description:	Crack Longitudinal
Distance (ft):	122.8

Distance (It):	122.8
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	10
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

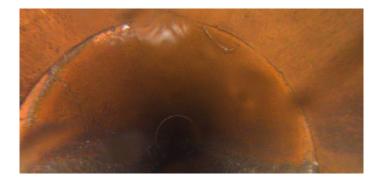


Code:**RFJ**Description:**Roots Fine Joint**

Distance (ft):	137.4
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	12
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	

Code: Description: DAGS Deposits Attached Grease



Distance (ft):	157.0
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	7
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	F01
Within 8" of Joint:	NO
Remarks:	

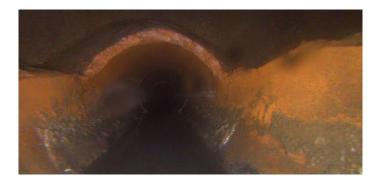

Code:AMHDescription:Manhole

Distance (ft):	158.7
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-803-038