

Profile/Pho	oto Observatio	n Report				RedZone
Date:	04/12/2018	Weather:			Coding:	PACP 6.0
Pipe Length (ft)	: 191.2	Owner:	NA		Pre Clean:	Not Known
P.O.#:		Surveyor:	Jen Cos	tello	PSR:	P-806-057-058
Customer:		Clean Date	e: 01/01/ 2	1900	Shape:	С
Street:	DEER CROSS TRL		Flow Con	trol:	Not Controlled	
City:	Hobart, IN		Year Ren	ewed:		
Location:	Sidewalk		Tape/Me	dia #:		
Purpose:	Maintenance Rela	ated	Dia/Heig	ht:	8"	
Use:	Sanitary		Material:		PVC	
Drain Area:	NA		Lining:		Cured in Place	
Category:	NA					
Comment:						
Location Details	5:		Direction	of Survey:	Downstream	
US MH:	M-806-057	DS MH:	M-806-058	1	Fotal Length Surveyed (ft)	: 188.2
D&M Index:	1.00	O&M Quicl	<:	1100	O&M Rating:	1.00
Structural Index:	0.00	Structural (Quick:	0000	Structural Rating:	0.00
Overall Index:	1.00	Overall Qui	ick:	1100	Overall Rating:	1.00



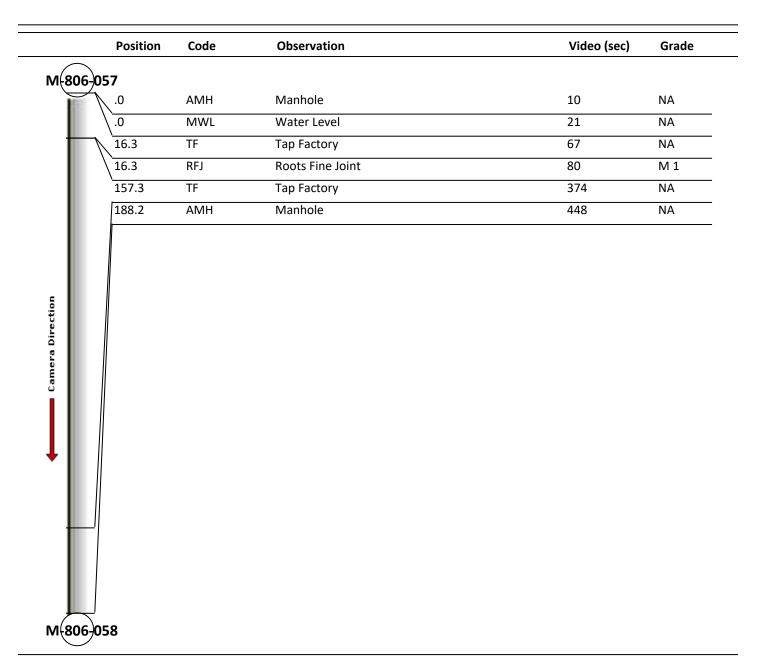


Code: Description:	AMH Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-806-057

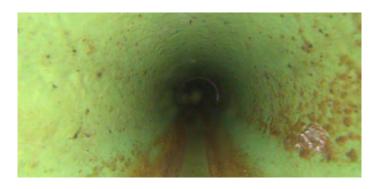


Code: MWL Description: Water Level

Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

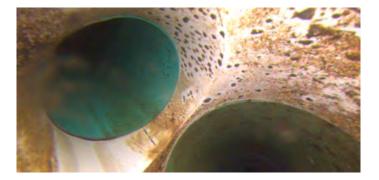


TF Tap Factory
16.3
0
0
1
4.000

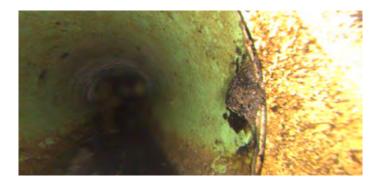


Code:	RFJ
Description:	Roots Fine Joint
Distance (ft):	16.3
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	3
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES

Remarks:

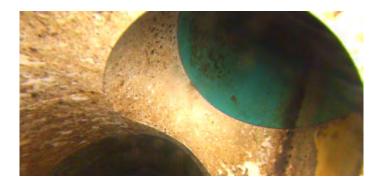

Code: Description:	TF Tap Factory
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	157.3 0 0 2 4.000

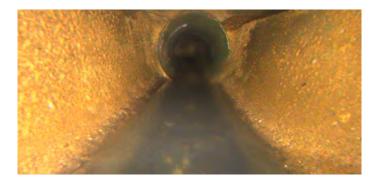

Code:AMHDescription:Manhole

Distance (ft):	188.2
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-806-058