Profile/Photo Observation Report



Date: 10/02/2018 Weather: **PACP 6.0** Coding: Pipe Length (ft): 162.5 Owner: NA Pre Clean: **Not Known** P.O.#: **Justin Gonzales** PSR: P-903-016-017 Surveyor:

Customer: Clean Date: 01/01/1900 Shape: C

Street: Rand St. Flow Control: Not Controlled

City: Hobart, IN Year Renewed:
Location: Light Highway Tape/Media #:

Purpose: Routine Assessment Dia/Height: 12"
Use: Sanitary Material: VCP

Drain Area: **NA** Lining:

Category: NA

Comment:

Location Details: Direction of Survey: Downstream

US MH: M-903-016 DS MH: M-903-017 Total Length Surveyed (ft): 140.6

1.81 2D17 65.00 O&M Index: O&M Quick: O&M Rating: 2.00 3122 8.00 Structural Quick: Structural Rating: Structural Index: 312E 1.83 73.00 Overall Quick: Overall Rating: Overall Index:

	Position	Code	Observation	Video (sec)	Grade
903	016				
	0.	AMH	Manhole	11	NA
ш	0.	MWL	Water Level	22	NA
н	\0	DAGS(S01)	Deposits Attached Grease	33	M 2
Ш	20.7	CL	Crack Longitudinal	86	S 2
Ш	27.9	TF	Tap Factory	114	NA
П	29.1	JOM	Joint Offset Medium	129	S 1
н	74.6	CL	Crack Longitudinal	232	S 2
н	82.6	CM	Crack Multiple	261	S 3
н	92.8	TF	Tap Factory	295	NA
ш	93.3	RFJ	Roots Fine Joint	308	M 1
ш	95.6	ISSR	Intruding Sealing Ring	325	M 2
ш	101.5	RFJ	Roots Fine Joint	349	M 1
Ш	106.7	RFJ	Roots Fine Joint	371	M 1
ш	112.0	RFJ	Roots Fine Joint	394	M 1
П	114.6	RFJ	Roots Fine Joint	411	M 1
Ш	125.6	RFJ	Roots Fine Joint	444	M 1
н	127.8	RFJ	Roots Fine Joint	460	M 1
н	135.6	TF	Tap Factory	488	NA
П	140.6	AMH	Manhole	510	NA
	140.6	DAGS(F01)	Deposits Attached Grease	521	M 2
903-					

Code:

Description:

Remarks:



Distance (ft): .0
Structural Grade: 0
O&M Grade: 0
Clock Start/From:
Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:
Within 8" of Joint: NO

AMH

Manhole

M-903-016



Code: MWL

Description: Water Level

Distance (ft): .0
Structural Grade: 0
O&M Grade: 0
Clock Start/From:

Clock To: 1st Value: 2nd Value:

Value Percent:

Continuous Index:

Within 8" of Joint:

Remarks:

5.000

NO

Code: DAGS


Description: Deposits Attached Grease



Distance (ft): .0
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 7
Clock To: 5

1st Value: 2nd Value:

Value Percent: 5.000
Continuous Index: S01
Within 8" of Joint: YES
Remarks: WANDER

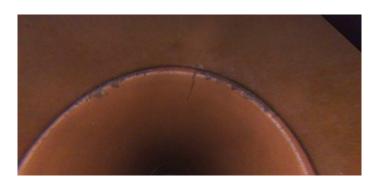

Code: CL

Description: Crack Longitudinal

Distance (ft): 20.7
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 12

Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint:

Remarks:

YES



Code: **TF**

Description: Tap Factory

Distance (ft): 27.9
Structural Grade: 0

O&M Grade: 0

Clock Start/From: 2

Clock To:

2nd Value:

1st Value: **4.000**

Value Percent: Continuous Index: Within 8" of Joint:



Code: JOM

Description: Joint Offset Medium

Distance (ft): 29.1
Structural Grade: 1
O&M Grade: 0

Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

NO




Code: CL

Description: Crack Longitudinal

Distance (ft): 74.6
Structural Grade: 2
O&M Grade: 0
Clock Start/From: 12
Clock To:

1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint: YES

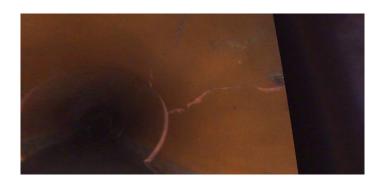

Code: CM

Description: Crack Multiple

Distance (ft): 82.6
Structural Grade: 3

O&M Grade: 0

Clock Start/From: 2

Clock To: 3

1st Value:

1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: YES

Remarks:

. _0



Code: **TF**

Description: Tap Factory

Distance (ft): 92.8
Structural Grade: 0

O&M Grade: 0

Clock Start/From: 3

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:



Code: RFJ

Description: Roots Fine Joint


Distance (ft): 93.3
Structural Grade: 0
O&M Grade: 1
Clock Start/From: 8
Clock To: 3

1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

YES

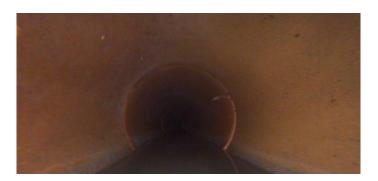

Code: ISSR

Description: Intruding Sealing Ring

Distance (ft): 95.6
Structural Grade: 0

O&M Grade: 2

Clock Start/From: 2

Clock To: 3

1st Value:


Value Percent: 5.000

Continuous Index:

Within 8" of Joint: NO

Remarks:

2nd Value:

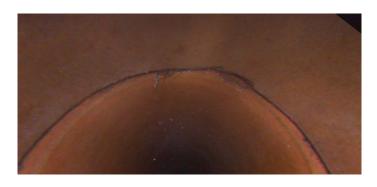

Code: RFJ

Description: Roots Fine Joint

Distance (ft): 101.5
Structural Grade: 0
O&M Grade: 1
Clock Start/From: 12

Clock To:
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint:

Remarks:

YES



Code: RFJ

Description: Roots Fine Joint

Distance (ft): 106.7
Structural Grade: 0
O&M Grade: 1
Clock Start/From: 12
Clock To: 3
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint: YES



Code: RFJ

Description: Roots Fine Joint


Distance (ft): 112.0
Structural Grade: 0
O&M Grade: 1
Clock Start/From: 9
Clock To: 2
1st Value:

1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

YES

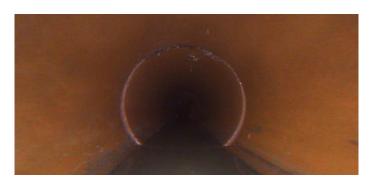


Code: RFJ

Description: Roots Fine Joint

Distance (ft): 114.6
Structural Grade: 0
O&M Grade: 1
Clock Start/From: 11
Clock To: 1
1st Value:
2nd Value:
Value Percent:
Continuous Index:

Within 8" of Joint: YES

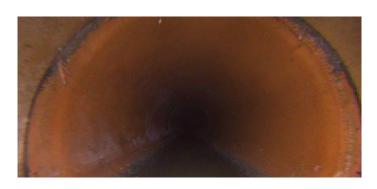

Code: RFJ


Description: **Roots Fine Joint**

Distance (ft): 125.6 Structural Grade: 0 O&M Grade: 1 Clock Start/From: 10 Clock To: 2 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint:

Remarks:

YES

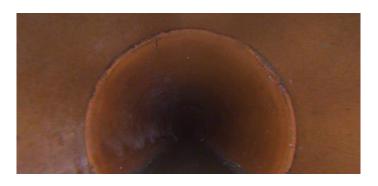

Code: RFJ

Description: **Roots Fine Joint**

Distance (ft): 127.8 Structural Grade: 0 O&M Grade: 1 Clock Start/From: 10 2 Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks:

YES



Code: **TF**

Description: Tap Factory

Distance (ft): 135.6
Structural Grade: 0
O&M Grade: 0
Clock Start/From: 3

Clock To:

1st Value: **4.000**

2nd Value: Value Percent: Continuous Index: Within 8" of Joint:

Remarks:



Code: AMH
Description: Manhole


Distance (ft): 140.6
Structural Grade: 0
O&M Grade: 0

O&M Grade: Clock Start/From:

Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index:

Within 8" of Joint: NO

Remarks: M-903-017

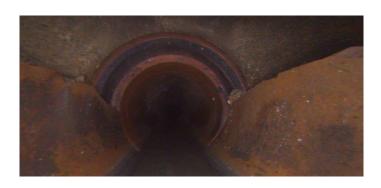

Code: DAGS

Description: Deposits Attached Grease

Distance (ft): 140.6
Structural Grade: 0
O&M Grade: 2
Clock Start/From: 7
Clock To: 5

1st Value: 2nd Value:

Value Percent: 5.000
Continuous Index: F01
Within 8" of Joint: YES

Remarks: WANDER