## **Profile/Photo Observation Report**

1		•			ROBOTICS
Date:	12/11/2024	Weather:		Coding:	PACP 7.0
Pipe Length (ft)	: <b>196.0</b>	Owner:	City of Hobart	Pre Clean:	Heavy Cleaning
P.O.#:	YES502259	Surveyor:	S. Bucklin	PSR:	P-507-028-027
Customer:	City of Hobart	Clean Date:	09/27/2024	Shape:	с
Street:	South Dekalb Stre	et	Flow Control:	Not Controlled	
City:	Hobart, IN		Year Renewed:		
Location:	Sidewalk		Tape/Media #:		
Purpose:	Sewer System Eva	luation Survey (S	<b>S</b> Dia/Height:	10"	
Use:	Sanitary Sewage P	ipe	Material:	VCP	
Drain Area:			Lining:	None	
Category:	NA				
Comment:					
Location Details	s:		Direction of Surv	vey: Downstream	
US MH:	M-507-027	DS MH:	M-507-028	Total Length Surveyed (ft	: <b>191.9</b>
D&M Index:	1.84	O&M Quick:	412	2D O&M Rating:	68.00
Structural Index:	2.21	Structural Qu	uick: 514		73.00
Overall Index:	2.01	Overall Quicl	. 514	Verall Rating:	141.00


	Position	Code	Observation	Video (sec)	Grade
M-507-	027				
$\sim$	0.	AMH	Manhole	0	NA
- 11	1.0	MWL	Miscellaneous Water Level	58	NA
	.0	DSF(S01)	Deposits Settled Fine	65	M 2
- 11	15.7	LL	Line Left	110	M 1
- 11	8.8	DAE	Deposits Attached Encrustation	168	M 2
	27.4	CS	Crack Spiral	290	S 2
	27.6	DAE	Deposits Attached Encrustation	301	M 2
- 11	28.1	MWLS(S02)	Miscellaneous Water Level Sag	322	S 2
- 11	44.2	DAE	Deposits Attached Encrustation	451	M 2
s 📑	44.9	RMB	Roots Medium Barrel	491	M 4
Camera Direction	44.9	IWB	Infiltration Weeper Barrel	504	M 2
	- \\45.8	BVV	Broken Void Visible	565	S 5
nera	54.9	RFJ	Roots Fine Joint	655	M 1
La La	64.1	RFJ	Roots Fine Joint	725	M 1
111	64.1	DAE	Deposits Attached Encrustation	736	M 2
	90.2	MWLS(F02)	Miscellaneous Water Level Sag	868	S 2
1	90.2	DSF(F01)	Deposits Settled Fine	875	M 2
	// 107.5	MWLS(S03)	Miscellaneous Water Level Sag	957	S 2
	/ 111.2	SSS	Surface Damage Surface Spalling	1005	S 2

Tuesday, January 14, 2025

RedZone

	TDI	Ten Dreek in Intervaling	1021	N/ 3
111.5	ТВІ	Tap Break-in Intruding	1021	M 2
113.0	RFJ	Roots Fine Joint	1069	M 1
122.8	FM	Fracture Multiple	1146	S 4
//122.8	DAE	Deposits Attached Encrustation	1158	M 2
// 123.0	TBI	Tap Break-in Intruding	1174	M 2
/ 128.5	RFJ	Roots Fine Joint	1243	M 1
/131.4	RFJ	Roots Fine Joint	1300	M 1
/ 133.9	LL	Line Left	1324	M 1
134.4	JAM	Joint Angular Medium	1366	S 3
137.8	CL	Crack Longitudinal	1395	S 2
137.9	ISB	Infiltration Stain Barrel	1407	M 1
140.4	CL	Crack Longitudinal	1446	S 2
142.9	MWLS(F03)	Miscellaneous Water Level Sag	1467	S 2
154.0	MWLS(S04)	Miscellaneous Water Level Sag	1515	S 2
155.9	DAE(S05)	Deposits Attached Encrustation	1563	M 2
165.3	DAE(F05)	Deposits Attached Encrustation	1612	M 2
173.2	MWLS(F04)	Miscellaneous Water Level Sag	1655	S 2
177.4	СМ	Crack Multiple	1703	S 3
180.2	MWLS(S06)	Miscellaneous Water Level Sag	1731	S 2
191.7	MWLS(F06)	Miscellaneous Water Level Sag	1844	S 2
/ 191.9	AMH	Manhole	1932	NA

M-507-028

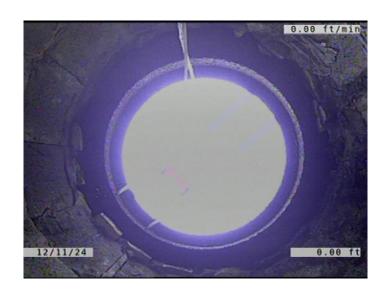

Code: Description:	AMH Manhole
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	M-507-027



Code:	MWL
Description:	Miscellaneous Water Level
Distance (ft):	.0
Structural Grade:	0
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	10.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	DSF Deposits Settled Fine
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	.0 0 2 5 7 5.000 \$01 YES
Remarks:	




Code:	LL
Description:	Line Left
Distance (ft):	5.7
	5.7
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	



Code: Description:	DAE Deposits Attached Encrustation
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent:	8.8 0 2 8 4 5.000
Continuous Index: Within 8" of Joint: Remarks:	YES JOINT IS WET ALSO.



CS
Crack Spiral
27.4
2
0
4
8
YES

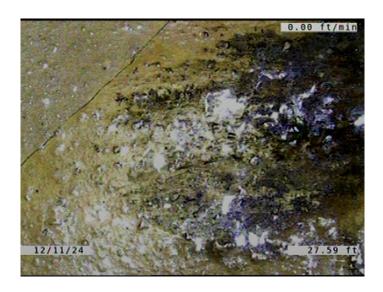

Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	27.6
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	4
Clock To:	8
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	28.1
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	S02
Within 8" of Joint:	NO
Remarks:	




Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	44.2
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	8
Clock To:	4
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	RMB Roots Medium Barrel
Distance (ft): Structural Grade:	44.9 0
O&M Grade:	4
Clock Start/From: Clock To:	10 2
1st Value: 2nd Value:	
Value Percent: Continuous Index:	15.000
Within 8" of Joint: Remarks:	NO



Code: Description:	IWB Infiltration Weeper Barrel
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	44.9 0 2 11 1 YES
Remarks:	

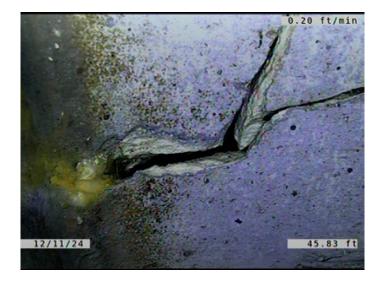

Distance (ft):45.8Structural Grade:5O&M Grade:0Clock Start/From:7Clock To:51st Value:-2nd Value:-Value Percent:-Continuous Index:YESRemarks:-	Code: Description:	BVV Broken Void Visible
O&M Grade:OClock Start/From:7Clock To:51st Value:2nd Value:Value Percent:Continuous Index:Within 8" of Joint:YES	Distance (ft):	45.8
Clock Start/From: 7 Clock To: 5 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: YES	Structural Grade:	5
Clock To: 5 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: YES	O&M Grade:	0
1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: YES	Clock Start/From:	7
2nd Value: Value Percent: Continuous Index: Within 8" of Joint: YES	Clock To:	5
Value Percent: Continuous Index: Within 8" of Joint: YES	1st Value:	
Continuous Index: Within 8" of Joint: YES	2nd Value:	
Within 8" of Joint: YES	Value Percent:	
	Continuous Index:	
Remarks:	Within 8" of Joint:	YES
	Remarks:	



Code: Description:	RFJ Roots Fine Joint
Distance (ft):	54.9
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	10
Clock To:	2
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code:	RFJ
Description:	<b>Roots Fine Joint</b>
Distance (ft):	64.1
	04.1
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	1
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	DAE Deposits Attached Encrustation
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent:	64.1 0 2 8 4
Continuous Index: Within 8" of Joint: Remarks:	YES



Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	90.2
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	F02
Within 8" of Joint:	NO
Remarks:	



Code:	DSF
Description:	Deposits Settled Fine
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	90.2 0 2 5 7 5.000 F01 YES



Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	107.5
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	S03
Within 8" of Joint:	NO
Remarks:	




Code: Description:	SSS Surface Damage Surface Spalling
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	111.2 2 0 12 3 YES



Code:	ТВІ
Description:	Tap Break-in Intruding
Distance (ft):	111.5
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	2
Clock To:	
1st Value:	6.000
2nd Value:	1.000
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	ROOTS GROWING IN THE JOINTS OF THE SERVICE.



Distance (ft):113.0Structural Grade:0O&M Grade:1Clock Start/From:12Clock To:121st Value:22nd Value:4Value Percent:5Continuous Index:YESRemarks:5	)

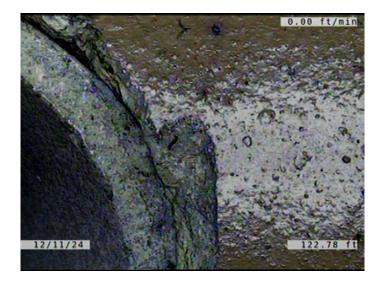

Code:	FM
Description:	Fracture Multiple
Distance (ft):	122.8
Structural Grade:	4
O&M Grade:	0
Clock Start/From:	9
Clock To:	12
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	DAE Deposits Attached Encrustation
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	122.8 0 2 9 12 5.000 YES



Code:	ТВІ
Description:	Tap Break-in Intruding
Distance (ft):	123.0
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	10
Clock To:	
1st Value:	6.000
2nd Value:	1.000
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	ACTIVITY. CONSTANTLY RUNNING WATER.




Distance (ft):128.5Structural Grade:0O&M Grade:1Clock Start/From:10Clock To:111st Value:112nd Value:	




Code:	RFJ
Description:	<b>Roots Fine Joint</b>
	101.4
Distance (ft):	131.4
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	11
Clock To:	1
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	




Code: Description:	LL Line Left
Distance (ft):	133.9
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

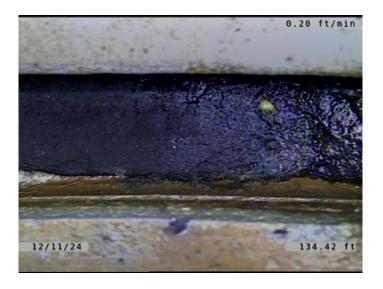

Code: Description:	JAM Joint Angular Medium
Distance (ft):	134.4
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	NO
Remarks:	

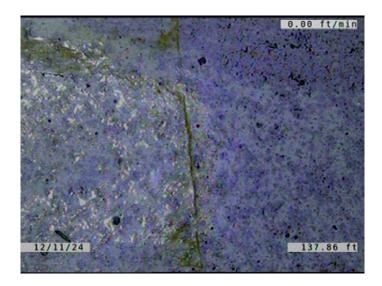

Code: Description:	CL Crack Longitudinal
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	137.8 2 0 9
Remarks:	TES .

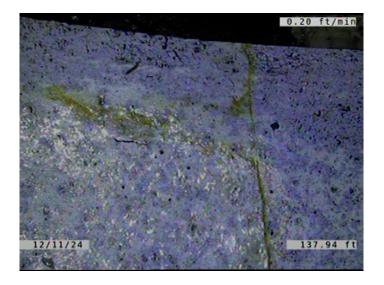

Code: Description:	ISB Infiltration Stain Barrel
Distance (ft):	137.9
Structural Grade:	0
O&M Grade:	1
Clock Start/From:	7
Clock To:	9
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code:	CL
Description:	Crack Longitudinal
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	140.4 2 0 2 YES



Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	142.9
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	15.000
Continuous Index:	F03
Within 8" of Joint:	NO
Remarks:	



Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	154.0
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	10.000
Continuous Index:	S04
Within 8" of Joint:	NO
Remarks:	



Code: Description:	DAE Deposits Attached Encrustation
Distance (ft):	155.9
Structural Grade:	0
O&M Grade:	2
Clock Start/From:	7
Clock To:	5
1st Value:	
2nd Value:	
Value Percent:	5.000
Continuous Index:	S05
Within 8" of Joint:	YES


Remarks:



Code: Description:	DAE Deposits Attached Encrustation
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint: Remarks:	165.3 0 2 7 5 5 5.000 F05 YES
O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	2 7 5 5.000 F05



Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	173.2
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	10.000
Continuous Index:	F04
Within 8" of Joint:	NO
Remarks:	

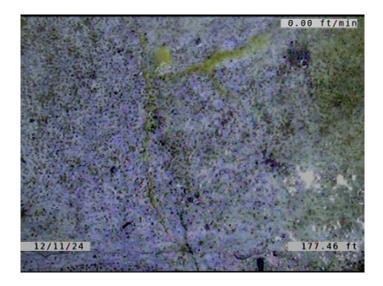

Code: Description:	CM Crack Multiple
Distance (ft):	177.4
Structural Grade:	3
O&M Grade:	0
Clock Start/From:	7
Clock To:	9
1st Value:	
2nd Value:	
Value Percent:	
Continuous Index:	
Within 8" of Joint:	YES
Remarks:	



Code: Description:	MWLS Miscellaneous Water Level Sag
Distance (ft):	180.2
Structural Grade:	2
O&M Grade:	0
Clock Start/From:	
Clock To:	
1st Value:	
2nd Value:	
Value Percent:	10.000
Continuous Index:	S06
Within 8" of Joint:	NO

Remarks:



MWLS Miscellaneous Water Level Sag
191.7
2
0
10.000
F06
NO



Code: Description:	AMH Manhole
Distance (ft): Structural Grade: O&M Grade: Clock Start/From: Clock To: 1st Value: 2nd Value: Value Percent: Continuous Index: Within 8" of Joint:	191.9 0 0
Remarks:	M-507-028